



Catalog

Table of Contents

•3	About us
• 4-14	BaseLED
•15-23	RegaLED
•24-38	ChangeLED
•39-53	StoreLED
•54-73	InduLED
•74-84	HaLED
•85-89	LED Panels

About Us

For more than 50 years we have been developing technical luminaires for and with customers.

The wishes and desires of the customers are always the starting point. On this basis, standard luminaires and individual solutions are produced.

Our strengths are customers orientation, quality, flexibility, reliability, speed and optimal assembly.

Let us implement your lighting projects together!

Our product range includes in particular indoor luminaires for:

- **Sales Areas**
- **Industrial Buildings - Warehouses**
- **Office & Administration - Furniture & Kitchens**
- **Advertisements**

BASELED

high-quality, ready-to-connect and super-flat LED under-cabinet luminaire and also shelf luminaire for all shelving systems

various covers (satined or clear)

energy efficiency class A / system luminous flux up to 175 lumens per watt

perfect light distribution / luminaire adjusted by 30° for optimal shelf illumination

absolutely homogeneous illumination / light colours 3.000K, 4.000K & 5.000K

tight colour tolerance MacAdam 3 / very good colour rendering CRI > 80

5-years system guarantee / service life > 50.000 hours

Protection category IP20 / protection class I


high-quality connection system GST 18/3

colour white RAL 9016

various mounting options (clamps, magnets, holders, screw-through bolt)

special cable lengths or plug-in system connectors upon customer request

special designs on customer request / various accessories available

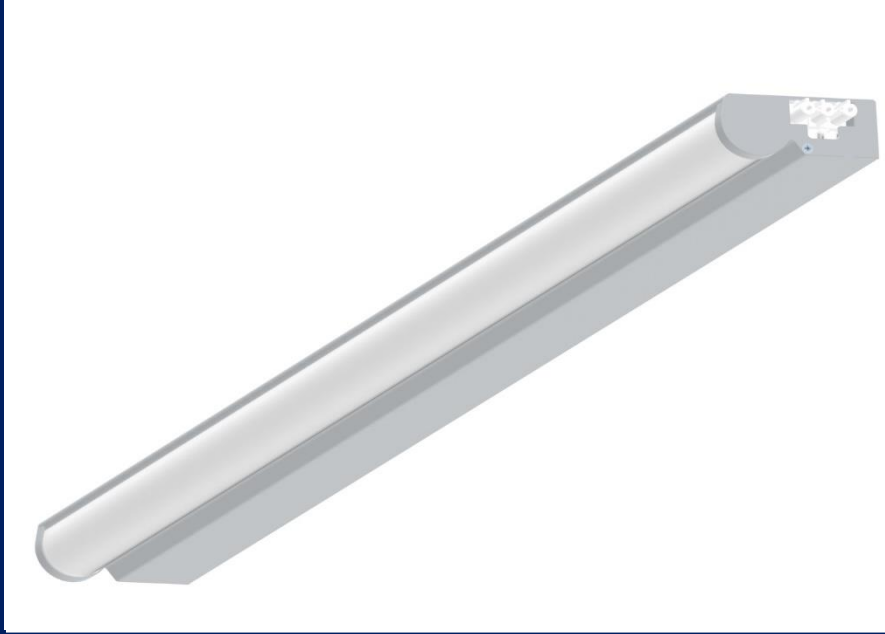

BaseLED Single Luminaire



Single luminaire (E), magnet mounting (ME), clamp (KE) or screw-through bolts (DE) possible, different light colours are available, other light colours on request, different wattages, different lengths, various covers, protection category IP20, ENEC certified

Typ	Article Number	Light Colour	Optic	System Output	Luminous Flux System	Dimension
BaseLED 15-865 KE	96013303002	3000 K	clear	13,4 W	2081 lm	865x74x35 mm
BaseLED 15-865 ME	96013303003	3000 K	clear	13,4 W	2081 lm	865x74x32 mm
BaseLED 15-865 KE	96013303010	3000 K	satined	13,4 W	1888 lm	865x74x35 mm
BaseLED 15-865 ME	96013303011	3000 K	satined	13,4 W	1888 lm	865x74x32 mm
BaseLED 15-865 DE	96013303020	3000 K	clear	13,4 W	2081 lm	865x74x34 mm
BaseLED 15-865 DE	96013303021	3000 K	satined	13,4 W	1888 lm	865x74x34 mm

BaseLED 15-865 KE	96013403002	4000 K	clear	13,4 W	2207 lm	865x74x35 mm
BaseLED 15-865 ME	96013403003	4000 K	clear	13,4 W	2207 lm	865x74x32 mm
BaseLED 15-865 KE	96013403010	4000 K	satined	13,4 W	2002 lm	865x74x35 mm
BaseLED 15-865 ME	96013403011	4000 K	satined	13,4 W	2002 lm	865x74x32 mm
BaseLED 15-865 DE	96013403020	4000 K	clear	13,4 W	2207 lm	865x74x34 mm
BaseLED 15-865 DE	96013403021	4000 K	satined	13,4 W	2002 lm	865x74x34 mm
BaseLED 15-865 KE	96013503002	5000 K	clear	13,8 W	2095 lm	865x74x35 mm
BaseLED 15-865 ME	96013503003	5000 K	clear	13,8 W	2095 lm	865x74x32 mm
BaseLED 15-865 KE	96013503010	5000 K	satined	13,8 W	1901 lm	865x74x35 mm
BaseLED 15-865 ME	96013503011	5000 K	satined	13,8 W	1901 lm	865x74x32 mm
BaseLED 15-865 DE	96013503020	5000 K	clear	13,8 W	2095 lm	865x74x34 mm
BaseLED 15-865 DE	96013503021	5000 K	satined	13,8 W	1901 lm	865x74x34 mm
BaseLED 19-1145 KE	96017303002	3000 K	clear	17,2 W	2774 lm	1145x74x35 mm
BaseLED 19-1145 ME	96017303003	3000 K	clear	17,2 W	2774 lm	1145x74x32 mm
BaseLED 19-1145 KE	96017303010	3000 K	satined	17,2 W	2517 lm	1145x74x35 mm
BaseLED 19-1145 ME	96017303011	3000 K	satined	17,2 W	2517 lm	1145x74x32 mm
BaseLED 19-1145 DE	96017303020	3000 K	clear	17,2 W	2774 lm	1145x74x34 mm
BaseLED 19-1145 DE	96017303021	3000 K	satined	17,2 W	2517 lm	1145x74x34 mm
BaseLED 19-1145 KE	96017403002	4000 K	clear	17,2 W	2939 lm	1145x74x35 mm
BaseLED 19-1145 ME	96017403003	4000 K	clear	17,2 W	2939 lm	1145x74x32 mm
BaseLED 19-1145 KE	96017403010	4000 K	satined	17,2 W	2666 lm	1145x74x35 mm
BaseLED 19-1145 ME	96017403011	4000 K	satined	17,2 W	2666 lm	1145x74x32 mm
BaseLED 19-1145 DE	96017403020	4000 K	clear	17,2 W	2939 lm	1145x74x34 mm
BaseLED 19-1145 DE	96017403021	4000 K	satined	17,2 W	2666 lm	1145x74x34 mm
BaseLED 19-1145 KE	96017503002	5000 K	clear	17,7 W	2794 lm	1145x74x35 mm
BaseLED 19-1145 ME	96017503003	5000 K	clear	17,7 W	2794 lm	1145x74x32 mm
BaseLED 19-1145 KE	96017503010	5000 K	satined	17,7 W	2534 lm	1145x74x35 mm
BaseLED 19-1145 ME	96017503011	5000 K	satined	17,7 W	2534 lm	1145x74x32 mm
BaseLED 19-1145 DE	96017503020	5000 K	clear	17,7 W	2794 lm	1145x74x34 mm
BaseLED 19-1145 DE	96017503021	5000 K	satined	17,7 W	2534 lm	1145x74x34 mm
BaseLED 23-1425 KE	96022303002	3000 K	clear	20,9 W	3468 lm	1425x74x35 mm
BaseLED 23-1425 ME	96022303003	3000 K	clear	20,9 W	3468 lm	1425x74x32 mm
BaseLED 23-1425 KE	96022303010	3000 K	satined	20,9 W	3146 lm	1425x74x35 mm
BaseLED 23-1425 ME	96022303011	3000 K	satined	20,9 W	3146 lm	1425x74x32 mm
BaseLED 23-1425 DE	96022303020	3000 K	clear	20,9 W	3468 lm	1425x74x34 mm
BaseLED 23-1425 DE	96022303021	3000 K	satined	20,9 W	3146 lm	1425x74x34 mm
BaseLED 23-1425 KE	96022403002	4000 K	clear	20,9 W	3676 lm	1425x74x35 mm
BaseLED 23-1425 ME	96022403003	4000 K	clear	20,9 W	3676 lm	1425x74x32 mm
BaseLED 23-1425 KE	96022403010	4000 K	satined	20,9 W	3335 lm	1425x74x35 mm
BaseLED 23-1425 ME	96022403011	4000 K	satined	20,9 W	3335 lm	1425x74x32 mm
BaseLED 23-1425 DE	96022403020	4000 K	clear	20,9 W	3676 lm	1425x74x34 mm
BaseLED 23-1425 DE	96022403021	4000 K	satined	20,9 W	3335 lm	1425x74x34 mm
BaseLED 23-1425 KE	96022503002	5000 K	clear	21,6 W	3492 lm	1425x74x35 mm
BaseLED 23-1425 ME	96022503003	5000 K	clear	21,6 W	3492 lm	1425x74x32 mm
BaseLED 23-1425 KE	96022503010	5000 K	satined	21,6 W	3168 lm	1425x74x35 mm
BaseLED 23-1425 ME	96022503011	5000 K	satined	21,6 W	3168 lm	1425x74x32 mm
BaseLED 23-1425 DE	96022503020	5000 K	clear	21,6 W	3492 lm	1425x74x34 mm
BaseLED 23-1425 DE	96022503021	5000 K	satined	21,6 W	3168 lm	1425x74x34 mm

BaseLED Series Luminaire



Series luminaire with plug and socket in the housing (S), magnet mounting (MS), clamp (KS) or screw-through bolts (DS) possible, different light colours are available, other light colours on request, different wattages, different lengths, various covers, protection category IP20, ENEC certified

Typ	Article Number	Light Colour	Optic	System Output	Luminous Flux System	Dimension
BaseLED 15-865 KS	96013303004	3000 K	clear	13,4 W	2081 lm	865x74x35 mm
BaseLED 15-865 MS	96013303005	3000 K	clear	13,4 W	2081 lm	865x74x32 mm
BaseLED 15-865 KS	96013303012	3000 K	satined	13,4 W	1888 lm	865x74x35 mm
BaseLED 15-865 MS	96013303013	3000 K	satined	13,4 W	1888 lm	865x74x32 mm
BaseLED 15-865 DS	96013303022	3000 K	clear	13,4 W	2081 lm	865x74x34 mm
BaseLED 15-865 DS	96013303023	3000 K	satined	13,4 W	1888 lm	865x74x34 mm

BaseLED 15-865 KS	96013403004	4000 K	clear	13,4 W	2207 lm	865x74x35 mm
BaseLED 15-865 MS	96013403005	4000 K	clear	13,4 W	2207 lm	865x74x32 mm
BaseLED 15-865 KS	96013403012	4000 K	satined	13,4 W	2002 lm	865x74x35 mm
BaseLED 15-865 MS	96013403013	4000 K	satined	13,4 W	2002 lm	865x74x32 mm
BaseLED 15-865 DS	96013403022	4000 K	clear	13,4 W	2207 lm	865x74x34 mm
BaseLED 15-865 DS	96013403023	4000 K	satined	13,4 W	2002 lm	865x74x34 mm
BaseLED 15-865 KS	96013503004	5000 K	clear	13,8 W	2095 lm	865x74x35 mm
BaseLED 15-865 MS	96013503005	5000 K	clear	13,8 W	2095 lm	865x74x32 mm
BaseLED 15-865 KS	96013503012	5000 K	satined	13,8 W	1901 lm	865x74x35 mm
BaseLED 15-865 MS	96013503013	5000 K	satined	13,8 W	1901 lm	865x74x32 mm
BaseLED 15-865 DS	96013503022	5000 K	clear	13,8 W	2095 lm	865x74x34 mm
BaseLED 15-865 DS	96013503023	5000 K	satined	13,8 W	1901 lm	865x74x34 mm
BaseLED 19-1145 KS	96017303004	3000 K	clear	17,2 W	2774 lm	1145x74x35 mm
BaseLED 19-1145 MS	96017303005	3000 K	clear	17,2 W	2774 lm	1145x74x32 mm
BaseLED 19-1145 KS	96017303012	3000 K	satined	17,2 W	2517 lm	1145x74x35 mm
BaseLED 19-1145 MS	96017303013	3000 K	satined	17,2 W	2517 lm	1145x74x32 mm
BaseLED 19-1145 DS	96017303022	3000 K	clear	17,2 W	2774 lm	1145x74x34 mm
BaseLED 19-1145 DS	96017303023	3000 K	satined	17,2 W	2517 lm	1145x74x34 mm
BaseLED 19-1145 KS	96017403004	4000 K	clear	17,2 W	2939 lm	1145x74x35 mm
BaseLED 19-1145 MS	96017403005	4000 K	clear	17,2 W	2939 lm	1145x74x32 mm
BaseLED 19-1145 KS	96017403012	4000 K	satined	17,2 W	2666 lm	1145x74x35 mm
BaseLED 19-1145 MS	96017403013	4000 K	satined	17,2 W	2666 lm	1145x74x32 mm
BaseLED 19-1145 DS	96017403022	4000 K	clear	17,2 W	2939 lm	1145x74x34 mm
BaseLED 19-1145 DS	96017403023	4000 K	satined	17,2 W	2666 lm	1145x74x34 mm
BaseLED 19-1145 KS	96017503004	5000 K	clear	17,7 W	2794 lm	1145x74x35 mm
BaseLED 19-1145 MS	96017503005	5000 K	clear	17,7 W	2794 lm	1145x74x32 mm
BaseLED 19-1145 KS	96017503012	5000 K	satined	17,7 W	2534 lm	1145x74x35 mm
BaseLED 19-1145 MS	96017503013	5000 K	satined	17,7 W	2534 lm	1145x74x32 mm
BaseLED 19-1145 DS	96017503022	5000 K	clear	17,7 W	2794 lm	1145x74x34 mm
BaseLED 19-1145 DS	96017503023	5000 K	satined	17,7 W	2534 lm	1145x74x34 mm
BaseLED 23-1425 KS	96022303004	3000 K	clear	20,9 W	3468 lm	1425x74x35 mm
BaseLED 23-1425 MS	96022303005	3000 K	clear	20,9 W	3468 lm	1425x74x32 mm
BaseLED 23-1425 KS	96022303012	3000 K	satined	20,9 W	3146 lm	1425x74x35 mm
BaseLED 23-1425 MS	96022303013	3000 K	satined	20,9 W	3146 lm	1425x74x32 mm
BaseLED 23-1425 DS	96022303022	3000 K	clear	20,9 W	3468 lm	1425x74x34 mm
BaseLED 23-1425 DS	96022303023	3000 K	satined	20,9 W	3146 lm	1425x74x34 mm
BaseLED 23-1425 KS	96022403004	4000 K	clear	20,9 W	3676 lm	1425x74x35 mm
BaseLED 23-1425 MS	96022403005	4000 K	clear	20,9 W	3676 lm	1425x74x32 mm
BaseLED 23-1425 KS	96022403012	4000 K	satined	20,9 W	3335 lm	1425x74x35 mm
BaseLED 23-1425 MS	96022403013	4000 K	satined	20,9 W	3335 lm	1425x74x32 mm
BaseLED 23-1425 DS	96022403022	4000 K	clear	20,9 W	3676 lm	1425x74x34 mm
BaseLED 23-1425 DS	96022403023	4000 K	satined	20,9 W	3335 lm	1425x74x34 mm
BaseLED 23-1425 KS	96022503004	5000 K	clear	21,6 W	3492 lm	1425x74x35 mm
BaseLED 23-1425 MS	96022503005	5000 K	clear	21,6 W	3492 lm	1425x74x32 mm
BaseLED 23-1425 KS	96022503012	5000 K	satined	21,6 W	3168 lm	1425x74x35 mm
BaseLED 23-1425 MS	96022503013	5000 K	satined	21,6 W	3168 lm	1425x74x32 mm
BaseLED 23-1425 DS	96022503022	5000 K	clear	21,6 W	3492 lm	1425x74x34 mm
BaseLED 23-1425 DS	96022503023	5000 K	satined	21,6 W	3168 lm	1425x74x34 mm

BaseLED with plug on the cable and socket in the housing



luminaire with plug on the cable and socket in the housing (1K), magnet mounting (M1K), clamp (K1K) or screw-through bolts (D1K) possible, different light colours are available, other light colours on request, different wattages, different lengths, various covers, protection category IP20, ENEC certified

Typ	Article Number	Light Colour	Optic	System Output	Luminous Flux System	Dimension
BaseLED 10-585 M1K	96009403015	4000 K	satined	10,1 W	1333 lm	585x74x32 mm
BaseLED 15-865 K1K	96013303006	3000 K	clear	13,4 W	2081 lm	865x74x35 mm
BaseLED 15-865 M1K	96013303007	3000 K	clear	13,4 W	2081 lm	865x74x32 mm
BaseLED 15-865 K1K	96013303014	3000 K	satined	13,4 W	1888 lm	865x74x35 mm
BaseLED 15-865 M1K	96013303015	3000 K	satined	13,4 W	1888 lm	865x74x32 mm
BaseLED 15-865 D1K	96013303018	3000 K	clear	13,4 W	2081 lm	865x74x34 mm
BaseLED 15-865 D1K	96013303019	3000 K	satined	13,4 W	1888 lm	865x74x34 mm
BaseLED 15-865 K1K	96013403006	4000 K	clear	13,4 W	2207 lm	865x74x35 mm
BaseLED 15-865 M1K	96013403007	4000 K	clear	13,4 W	2207 lm	865x74x32 mm

BaseLED 15-865 K1K	96013403014	4000 K	satined	13,4 W	2002 lm	865x74x35 mm
BaseLED 15-865 M1K	96013403015	4000 K	satined	13,4 W	2002 lm	865x74x32 mm
BaseLED 15-865 D1K	96013403018	4000 K	clear	13,4 W	2207 lm	865x74x34 mm
BaseLED 15-865 D1K	96013403019	4000 K	satined	13,4 W	2002 lm	865x74x34 mm
BaseLED 15-865 K1K	96013503006	5000 K	clear	13,8 W	2095 lm	865x74x35 mm
BaseLED 15-865 M1K	96013503007	5000 K	clear	13,8 W	2095 lm	865x74x32 mm
BaseLED 15-865 K1K	96013503014	5000 K	satined	13,8 W	1901 lm	865x74x35 mm
BaseLED 15-865 M1K	96013503015	5000 K	satined	13,8 W	1901 lm	865x74x32 mm
BaseLED 15-865 D1K	96013503018	5000 K	clear	13,8 W	2095 lm	865x74x34 mm
BaseLED 15-865 D1K	96013503019	5000 K	satined	13,8 W	1901 lm	865x74x34 mm
BaseLED 15-865 M1K	96013653015	6500 K	satined	13,4 W	1861 lm	865x74x32 mm
BaseLED 19-1145 K1K	96017303006	3000 K	clear	17,2 W	2774 lm	1145x74x35 mm
BaseLED 19-1145 M1K	96017303007	3000 K	clear	17,2 W	2774 lm	1145x74x32 mm
BaseLED 19-1145 K1K	96017303014	3000 K	satined	17,2 W	2517 lm	1145x74x35 mm
BaseLED 19-1145 M1K	96017303015	3000 K	satined	17,2 W	2517 lm	1145x74x32 mm
BaseLED 19-1145 D1K	96017303018	3000 K	clear	17,2 W	2774 lm	1145x74x34 mm
BaseLED 19-1145 D1K	96017303019	3000 K	satined	17,2 W	2517 lm	1145x74x34 mm
BaseLED 19-1145 K1K	96017403006	4000 K	clear	17,2 W	2939 lm	1145x74x35 mm
BaseLED 19-1145 M1K	96017403007	4000 K	clear	17,2 W	2939 lm	1145x74x32 mm
BaseLED 19-1145 K1K	96017403014	4000 K	satined	17,2 W	2666 lm	1145x74x35 mm
BaseLED 19-1145 M1K	96017403015	4000 K	satined	17,2 W	2666 lm	1145x74x32 mm
BaseLED 19-1145 D1K	96017403018	4000 K	clear	17,2 W	2939 lm	1145x74x34 mm
BaseLED 19-1145 D1K	96017403019	4000 K	satined	17,2 W	2666 lm	1145x74x34 mm
BaseLED 19-1145 K1K	96017503006	5000 K	clear	17,7 W	2794 lm	1145x74x35 mm
BaseLED 19-1145 M1K	96017503007	5000 K	clear	17,7 W	2794 lm	1145x74x32 mm
BaseLED 19-1145 K1K	96017503014	5000 K	satined	17,7 W	2534 lm	1145x74x35 mm
BaseLED 19-1145 M1K	96017503015	5000 K	satined	17,7 W	2534 lm	1145x74x32 mm
BaseLED 19-1145 D1K	96017503018	5000 K	clear	17,7 W	2794 lm	1145x74x34 mm
BaseLED 19-1145 D1K	96017503019	5000 K	satined	17,7 W	2534 lm	1145x74x34 mm
BaseLED 23-1425 K1K	96022303006	3000 K	clear	20,9 W	3468 lm	1425x74x35 mm
BaseLED 23-1425 M1K	96022303007	3000 K	clear	20,9 W	3468 lm	1425x74x32 mm
BaseLED 23-1425 K1K	96022303014	3000 K	satined	20,9 W	3146 lm	1425x74x35 mm
BaseLED 23-1425 M1K	96022303015	3000 K	satined	20,9 W	3146 lm	1425x74x32 mm
BaseLED 23-1425 D1K	96022303018	3000 K	clear	20,9 W	3468 lm	1425x74x34 mm
BaseLED 23-1425 D1K	96022303019	3000 K	satined	20,9 W	3146 lm	1425x74x34 mm
BaseLED 23-1425 K1K	96022403006	4000 K	clear	20,9 W	3676 lm	1425x74x35 mm
BaseLED 23-1425 M1K	96022403007	4000 K	clear	20,9 W	3676 lm	1425x74x32 mm
BaseLED 23-1425 K1K	96022403014	4000 K	satined	20,9 W	3335 lm	1425x74x35 mm
BaseLED 23-1425 M1K	96022403015	4000 K	satined	20,9 W	3335 lm	1425x74x32 mm
BaseLED 23-1425 D1K	96022403018	4000 K	clear	20,9 W	3676 lm	1425x74x34 mm
BaseLED 23-1425 D1K	96022403019	4000 K	satined	20,9 W	3335 lm	1425x74x34 mm
BaseLED 23-1425 K1K	96022503006	5000 K	clear	21,6 W	3492 lm	1425x74x35 mm
BaseLED 23-1425 M1K	96022503007	5000 K	clear	21,6 W	3492 lm	1425x74x32 mm
BaseLED 23-1425 K1K	96022503014	5000 K	satined	21,6 W	3168 lm	1425x74x35 mm
BaseLED 23-1425 M1K	96022503015	5000 K	satined	21,6 W	3168 lm	1425x74x32 mm
BaseLED 23-1425 D1K	96022503018	5000 K	clear	21,6 W	3492 lm	1425x74x34 mm
BaseLED 23-1425 D1K	96022503019	5000 K	satined	21,6 W	3168 lm	1425x74x34 mm

Series luminaire with plug and socket on the cable



Series luminaire with plug and socket on the cable (2K), magnet mounting (M2K), clamp (K2K) or screw-through bolts (D2K) possible, different light colours are available, other light colours on request, different wattages, different lengths, various covers, protection category IP20, ENEC certified

Typ	Article Number	Light Colour	Optic	System Output	Luminous Flux System	Dimension
BaseLED 10-585 M2K	96010403009	4000 K	satined	10,1 W	1333 lm	585x74x32 mm
BaseLED 15-865 K2K	96013303000	3000 K	clear	13,4 W	2081 lm	865x74x35 mm
BaseLED 15-865 M2K	96013303001	3000 K	clear	13,4 W	2081 lm	865x74x32 mm
BaseLED 15-865 K2K	96013303008	3000 K	satined	13,4 W	1888 lm	865x74x35 mm
BaseLED 15-865 M2K	96013303009	3000 K	satined	13,4 W	1888 lm	865x74x32 mm
BaseLED 15-865 D2K	96013303016	3000 K	clear	13,4 W	2081 lm	865x74x34 mm
BaseLED 15-865 D2K	96013303017	3000 K	satined	13,4 W	1888 lm	865x74x34 mm

BaseLED 15-865 K2K	96013403000	4000 K	clear	13,4 W	2207 lm	865x74x35 mm
BaseLED 15-865 M2K	96013403001	4000 K	clear	13,4 W	2207 lm	865x74x32 mm
BaseLED 15-865 K2K	96013403008	4000 K	satined	13,4 W	2002 lm	865x74x35 mm
BaseLED 15-865 M2K	96013403009	4000 K	satined	13,4 W	2002 lm	865x74x32 mm
BaseLED 15-865 D2K	96013403016	4000 K	clear	13,4 W	2207 lm	865x74x34 mm
BaseLED 15-865 D2K	96013403017	4000 K	satined	13,4 W	2002 lm	865x74x34 mm
BaseLED 15-865 K2K	96013503000	5000 K	clear	13,8 W	2095 lm	865x74x35 mm
BaseLED 15-865 M2K	96013503001	5000 K	clear	13,8 W	2095 lm	865x74x32 mm
BaseLED 15-865 K2K	96013503008	5000 K	satined	13,8 W	1901 lm	865x74x35 mm
BaseLED 15-865 M2K	96013503009	5000 K	satined	13,8 W	1901 lm	865x74x32 mm
BaseLED 15-865 D2K	96013503016	5000 K	clear	13,8 W	2095 lm	865x74x34 mm
BaseLED 15-865 D2K	96013503017	5000 K	satined	13,8 W	1901 lm	865x74x34 mm
BaseLED 19-1145 K2K	96017303000	3000 K	clear	17,2 W	2774 lm	1145x74x35 mm
BaseLED 19-1145 M2K	96017303001	3000 K	clear	17,2 W	2774 lm	1145x74x32 mm
BaseLED 19-1145 K2K	96017303008	3000 K	satined	17,2 W	2517 lm	1145x74x35 mm
BaseLED 19-1145 M2K	96017303009	3000 K	satined	17,2 W	2517 lm	1145x74x32 mm
BaseLED 19-1145 D2K	96017303016	3000 K	clear	17,2 W	2774 lm	1145x74x34 mm
BaseLED 19-1145 D2K	96017303017	3000 K	satined	17,2 W	2517 lm	1145x74x34 mm
BaseLED 19-1145 K2K	96017403000	4000 K	clear	17,2 W	2939 lm	1145x74x35 mm
BaseLED 19-1145 M2K	96017403001	4000 K	clear	17,2 W	2939 lm	1145x74x32 mm
BaseLED 19-1145 K2K	96017403008	4000 K	satined	17,2 W	2666 lm	1145x74x35 mm
BaseLED 19-1145 M2K	96017403009	4000 K	satined	17,2 W	2666 lm	1145x74x32 mm
BaseLED 19-1145 D2K	96017403016	4000 K	clear	17,2 W	2939 lm	1145x74x34 mm
BaseLED 19-1145 D2K	96017403017	4000 K	satined	17,2 W	2666 lm	1145x74x34 mm
BaseLED 19-1145 K2K	96017503000	5000 K	clear	17,7 W	2794 lm	1145x74x35 mm
BaseLED 19-1145 M2K	96017503001	5000 K	clear	17,7 W	2794 lm	1145x74x32 mm
BaseLED 19-1145 K2K	96017503008	5000 K	satined	17,7 W	2534 lm	1145x74x35 mm
BaseLED 19-1145 M2K	96017503009	5000 K	satined	17,7 W	2534 lm	1145x74x32 mm
BaseLED 19-1145 D2K	96017503016	5000 K	clear	17,7 W	2794 lm	1145x74x34 mm
BaseLED 19-1145 D2K	96017503017	5000 K	satined	17,7 W	2534 lm	1145x74x34 mm
BaseLED 23-1425 K2K	96022303000	3000 K	clear	20,9 W	3468 lm	1425x74x35 mm
BaseLED 23-1425 M2K	96022303001	3000 K	clear	20,9 W	3468 lm	1425x74x32 mm
BaseLED 23-1425 K2K	96022303008	3000 K	satined	20,9 W	3146 lm	1425x74x35 mm
BaseLED 23-1425 M2K	96022303009	3000 K	satined	20,9 W	3146 lm	1425x74x32 mm
BaseLED 23-1425 D2K	96022303016	3000 K	clear	20,9 W	3468 lm	1425x74x34 mm
BaseLED 23-1425 D2K	96022303017	3000 K	satined	20,9 W	3146 lm	1425x74x34 mm
BaseLED 23-1425 K2K	96022403000	4000 K	clear	20,9 W	3676 lm	1425x74x35 mm
BaseLED 23-1425 M2K	96022403001	4000 K	clear	20,9 W	3676 lm	1425x74x32 mm
BaseLED 23-1425 K2K	96022403008	4000 K	satined	20,9 W	3335 lm	1425x74x35 mm
BaseLED 23-1425 M2K	96022403009	4000 K	satined	20,9 W	3335 lm	1425x74x32 mm
BaseLED 23-1425 D2K	96022403016	4000 K	clear	20,9 W	3676 lm	1425x74x34 mm
BaseLED 23-1425 D2K	96022403017	4000 K	satined	20,9 W	3335 lm	1425x74x34 mm
BaseLED 23-1425 K2K	96022503000	5000 K	clear	21,6 W	3492 lm	1425x74x35 mm
BaseLED 23-1425 M2K	96022503001	5000 K	clear	21,6 W	3492 lm	1425x74x32 mm
BaseLED 23-1425 K2K	96022503008	5000 K	satined	21,6 W	3168 lm	1425x74x35 mm
BaseLED 23-1425 M2K	96022503009	5000 K	satined	21,6 W	3168 lm	1425x74x32 mm
BaseLED 23-1425 D2K	96022503016	5000 K	clear	21,6 W	3492 lm	1425x74x34 mm
BaseLED 23-1425 D2K	96022503017	5000 K	satined	21,6 W	3168 lm	1425x74x34 mm

RegaLED

high-quality, ready-to-connect LED shelf luminaire for all shelving systems

various covers (satined or clear)

energy efficiency class A / system luminous flux up to 175 lumens per watt

perfect light distribution / luminaire adjusted by 30° for optimal shelf illumination

absolutely homogeneous illumination / light colours

3.000K, 4.000K & 5.000K

tight colour tolerance MacAdam 3 / very good colour rendering CRI type. 80

5-years system guarantee / service life > 60.000 hours

ENEC certified

Protection category IP20 / protection class I

high-quality connection system GST 18/3

colour white RAL 9016

various mounting options (clamps, magnets, holders)

special cable lengths or plug-in system connectors on customer request

special designs on customer request

various accessories available



RegaLED Single Luminaire



Single luminaire (E), magnet mounting (ME) or clamp (KE) possible, different light colours are available, other light colours on request, different wattages, different lengths, various covers, protection category IP20, ENEC certified

Type	Article Number	Light Colour	Optic	System Outout	Luminous Flux System	Dimension
RegaLED 13-864 KE	81013303002	3000 K	clear	15,0 W	2357 lm	864x42x56 mm
RegaLED 13-864 ME	81013303003	3000 K	clear	15,0 W	2357 lm	864x42x56 mm
RegaLED 13-864 KE	81013303010	3000 K	satined	15,0 W	2138 lm	864x42x56 mm
RegaLED 13-864 ME	81013303011	3000 K	satined	15,0 W	2138 lm	864x42x56 mm
RegaLED 13-864 KE	81013403002	4000 K	clear	15,0 W	2503 lm	864x42x56 mm
RegaLED 13-864 ME	81013403003	4000 K	clear	15,0 W	2503 lm	864x42x56 mm
RegaLED 13-864 KE	81013403010	4000 K	satined	15,0 W	2270 lm	864x42x56 mm
RegaLED 13-864 ME	81013403011	4000 K	satined	15,0 W	2270 lm	864x42x56 mm
RegaLED 13-864 KE	81013503002	5000 K	clear	15,0 W	2503 lm	864x42x56 mm
RegaLED 13-864 ME	81013503003	5000 K	clear	15,0 W	2503 lm	864x42x56 mm
RegaLED 13-864 KE	81013503010	5000 K	satined	15,0 W	2270 lm	864x42x56 mm
RegaLED 13-864 ME	81013503011	5000 K	satined	15,0 W	2270 lm	864x42x56 mm
RegaLED 17-1144 KE	81017303002	3000 K	clear	19,5 W	3143 lm	1144x42x56 mm
RegaLED 17-1144 ME	81017303003	3000 K	clear	19,5 W	3143 lm	1144x42x56 mm
RegaLED 17-1144 KE	81017303010	3000 K	satined	19,5 W	2851 lm	1144x42x56 mm
RegaLED 17-1144 ME	81017303011	3000 K	satined	19,5 W	2851 lm	1144x42x56 mm
RegaLED 17-1144 KE	81017403002	4000 K	clear	19,5 W	3337 lm	1144x42x56 mm
RegaLED 17-1144 ME	81017403003	4000 K	clear	19,5 W	3337 lm	1144x42x56 mm
RegaLED 17-1144 KE	81017403010	4000 K	satined	19,5 W	3027 lm	1144x42x56 mm
RegaLED 17-1144 ME	81017403011	4000 K	satined	19,5 W	3027 lm	1144x42x56 mm
RegaLED 17-1144 KE	81017503002	5000 K	clear	19,5 W	3337 lm	1144x42x56 mm
RegaLED 17-1144 ME	81017503003	5000 K	clear	19,5 W	3337 lm	1144x42x56 mm
RegaLED 17-1144 KE	81017503010	5000 K	satined	19,5 W	3027 lm	1144x42x56 mm
RegaLED 17-1144 ME	81017503011	5000 K	satined	19,5 W	3027 lm	1144x42x56 mm
RegaLED 22-1424 KE	81022303002	3000 K	clear	23,9 W	3929 lm	1144x42x56 mm
RegaLED 22-1424 ME	81022303003	3000 K	clear	23,9 W	3929 lm	1144x42x56 mm
RegaLED 22-1424 KE	81022303010	3000 K	satined	23,9 W	3564 lm	1424x42x56 mm
RegaLED 22-1424 ME	81022303011	3000 K	satined	23,9 W	3564 lm	1424x42x56 mm
RegaLED 22-1424 KE	81022403002	4000 K	clear	23,9 W	4171 lm	1424x42x56 mm
RegaLED 22-1424 ME	81022403003	4000 K	clear	23,9 W	4171 lm	1424x42x56 mm
RegaLED 22-1424 KE	81022403010	4000 K	satined	23,9 W	3784 lm	1424x42x56 mm
RegaLED 22-1424 ME	81022403011	4000 K	satined	23,9 W	3784 lm	1424x42x56 mm
RegaLED 22-1424 KE	81022503002	5000 K	clear	23,9 W	4171 lm	1424x42x56 mm
RegaLED 22-1424 ME	81022503003	5000 K	clear	23,9 W	4171 lm	1424x42x56 mm
RegaLED 22-1424 KE	81022503010	5000 K	satined	23,9 W	3784 lm	1424x42x56 mm
RegaLED 22-1424 ME	81022503011	5000 K	satined	23,9 W	3784 lm	1424x42x56 mm

RegaLED Series Luminaire



Series luminaire with plug and socket in the housing (S), magnet mounting (MS) or clamp (KE) possible, different light colours are available, other light colours on request, different wattages, different lengths, various covers, protection category IP20, ENEC certified

Type	Article Number	Light Colour	Optic	System Outout	Luminous Flux System	Dimension
RegaLED 13-864 KS	81013303004	3000 K	clear	15,0 W	2357 lm	864x42x56 mm
RegaLED 13-864 MS	81013303005	3000 K	clear	15,0 W	2357 lm	864x42x56 mm
RegaLED 13-864 KS	81013303012	3000 K	satined	15,0 W	2138 lm	864x42x56 mm
RegaLED 13-864 MS	81013303013	3000 K	satined	15,0 W	2138 lm	864x42x56 mm
RegaLED 13-864 KS	81013403004	4000 K	clear	15,0 W	2503 lm	864x42x56 mm
RegaLED 13-864 MS	81013403005	4000 K	clear	15,0 W	2503 lm	864x42x56 mm
RegaLED 13-864 KS	81013403012	4000 K	satined	15,0 W	2270 lm	864x42x56 mm
RegaLED 13-864 MS	81013403013	4000 K	satined	15,0 W	2270 lm	864x42x56 mm
RegaLED 13-864 KS	81013503004	5000 K	clear	15,0 W	2503 lm	864x42x56 mm
RegaLED 13-864 MS	81013503005	5000 K	clear	15,0 W	2503 lm	864x42x56 mm
RegaLED 13-864 KS	81013503012	5000 K	satined	15,0 W	2270 lm	864x42x56 mm
RegaLED 13-864 MS	81013503013	5000 K	satined	15,0 W	2270 lm	864x42x56 mm
RegaLED 17-1144 KS	81017303004	3000 K	clear	19,5 W	3143 lm	1144x42x56 mm
RegaLED 17-1144 MS	81017303005	3000 K	clear	19,5 W	3143 lm	1144x42x56 mm
RegaLED 17-1144 KS	81017303012	3000 K	satined	19,5 W	2851 lm	1144x42x56 mm
RegaLED 17-1144 MS	81017303013	3000 K	satined	19,5 W	2851 lm	1144x42x56 mm
RegaLED 17-1144 KS	81017403004	4000 K	clear	19,5 W	3337 lm	1144x42x56 mm
RegaLED 17-1144 MS	81017403005	4000 K	clear	19,5 W	3337 lm	1144x42x56 mm
RegaLED 17-1144 KS	81017403012	4000 K	satined	19,5 W	3027 lm	1144x42x56 mm
RegaLED 17-1144 MS	81017403013	4000 K	satined	19,5 W	3027 lm	1144x42x56 mm
RegaLED 17-1144 KS	81017503004	5000 K	clear	19,5 W	3337 lm	1144x42x56 mm
RegaLED 17-1144 MS	81017503005	5000 K	clear	19,5 W	3337 lm	1144x42x56 mm
RegaLED 17-1144 KS	81017503012	5000 K	satined	19,5 W	3027 lm	1144x42x56 mm
RegaLED 17-1144 MS	81017503013	5000 K	satined	19,5 W	3027 lm	1144x42x56 mm
RegaLED 22-1424 KS	81022303004	3000 K	clear	23,9 W	3929 lm	1144x42x56 mm
RegaLED 22-1424 MS	81022303005	3000 K	clear	23,9 W	3929 lm	1144x42x56 mm
RegaLED 22-1424 KS	81022303012	3000 K	satined	23,9 W	3564 lm	1424x42x56 mm
RegaLED 22-1424 MS	81022303013	3000 K	satined	23,9 W	3564 lm	1424x42x56 mm
RegaLED 22-1424 KS	81022403004	4000 K	clear	23,9 W	4171 lm	1424x42x56 mm
RegaLED 22-1424 MS	81022403005	4000 K	clear	23,9 W	4171 lm	1424x42x56 mm
RegaLED 22-1424 KS	81022403012	4000 K	satined	23,9 W	3784 lm	1424x42x56 mm
RegaLED 22-1424 MS	81022403013	4000 K	satined	23,9 W	3784 lm	1424x42x56 mm
RegaLED 22-1424 KS	81022503004	5000 K	clear	23,9 W	4171 lm	1424x42x56 mm
RegaLED 22-1424 MS	81022503005	5000 K	clear	23,9 W	4171 lm	1424x42x56 mm
RegaLED 22-1424 KS	81022503012	5000 K	satined	23,9 W	3784 lm	1424x42x56 mm
RegaLED 22-1424 MS	81022503013	5000 K	satined	23,9 W	3784 lm	1424x42x56 mm

RegaLED with plug on the cable and socket in the housing



Series luminaire with plug on the cable and socket in the housing (1K), magnet mounting (M1K) or clamp (K1K) possible, different light colours are available, other light colours on request, different wattages, different lengths, various covers, protection category IP20, ENEC certified

Type	Article Number	Light Colour	Optic	System Outout	Luminous Flux System	Dimension
RegaLED 9-584 M1K	81009403015	4000 K	satined	11,2 W	1514 lm	584x42x56 mm
RegaLED 13-864 K1K	81013303006	3000 K	clear	15,0 W	2357 lm	864x42x56 mm
RegaLED 13-864 M1K	81013303007	3000 K	clear	15,0 W	2357 lm	864x42x56 mm
RegaLED 13-864 K1K	81013303014	3000 K	satined	15,0 W	2138 lm	864x42x56 mm
RegaLED 13-864 M1K	81013303015	3000 K	satined	15,0 W	2138 lm	864x42x56 mm
RegaLED 13-864 K1K	81013403006	4000 K	clear	15,0 W	2503 lm	864x42x56 mm
RegaLED 13-864 M1K	81013403007	4000 K	clear	15,0 W	2503 lm	864x42x56 mm
RegaLED 13-864 K1K	81013403014	4000 K	satined	15,0 W	2270 lm	864x42x56 mm
RegaLED 13-864 M1K	81013403015	4000 K	satined	15,0 W	2270 lm	864x42x56 mm
RegaLED 13-864 K1K	81013503006	5000 K	clear	15,0 W	2503 lm	864x42x56 mm
RegaLED 13-864 M1K	81013503007	5000 K	clear	15,0 W	2503 lm	864x42x56 mm
RegaLED 13-864 K1K	81013503014	5000 K	satined	15,0 W	2270 lm	864x42x56 mm
RegaLED 13-864 M1K	81013503015	5000 K	satined	15,0 W	2270 lm	864x42x56 mm
RegaLED 17-1144 K1K	81017303006	3000K	clear	19,5 W	3143 lm	1144x42x56 mm
RegaLED 17-1144 M1K	81017303007	3000 K	clear	19,5 W	3143 lm	1144x42x56 mm
RegaLED 17-1144 K1K	81017303014	3000 K	satined	19,5 W	2851 lm	1144x42x56 mm
RegaLED 17-1144 M1K	81017303015	3000 K	satined	19,5 W	2851 lm	1144x42x56 mm
RegaLED 17-1144 K1K	81017403006	4000 K	clear	19,5 W	3337 lm	1144x42x56 mm
RegaLED 17-1144 M1K	81017403007	4000 K	clear	19,5 W	3337 lm	1144x42x56 mm
RegaLED 17-1144 K1K	81017403014	4000 K	satined	19,5 W	3027 lm	1144x42x56 mm
RegaLED 17-1144 M1K	81017403015	4000 K	satined	19,5 W	3027 lm	1144x42x56 mm
RegaLED 17-1144 K1K	81017503006	5000 K	clear	19,5 W	3337 lm	1144x42x56 mm
RegaLED 17-1144 M1K	81017503007	5000 K	clear	19,5 W	3337 lm	1144x42x56 mm
RegaLED 17-1144 K1K	81017503014	5000 K	satined	19,5 W	3027 lm	1144x42x56 mm
RegaLED 17-1144 M1K	81017503015	5000 K	satined	19,5 W	3027 lm	1144x42x56 mm
RegaLED 22-1424 K1K	81022303006	3000 K	clear	23,9 W	3929 lm	1144x42x56 mm
RegaLED 22-1424 M1K	81022303007	3000 K	clear	23,9 W	3929 lm	1144x42x56 mm
RegaLED 22-1424 K1K	81022303014	3000 K	satined	23,9 W	3564 lm	1424x42x56 mm
RegaLED 22-1424 M1K	81022303015	3000 K	satined	23,9 W	3564 lm	1424x42x56 mm
RegaLED 22-1424 K1K	81022403006	4000 K	clear	23,9 W	4171 lm	1424x42x56 mm
RegaLED 22-1424 M1K	81022403007	4000 K	clear	23,9 W	4171 lm	1424x42x56 mm
RegaLED 22-1424 K1K	81022403014	4000 K	satined	23,9 W	3784 lm	1424x42x56 mm
RegaLED 22-1424 M1K	81022403015	4000 K	satined	23,9 W	3784 lm	1424x42x56 mm
RegaLED 22-1424 K1K	81022503006	5000 K	clear	23,9 W	4171 lm	1424x42x56 mm
RegaLED 22-1424 M1K	81022503007	5000 K	clear	23,9 W	4171 lm	1424x42x56 mm
RegaLED 22-1424 K1K	81022503014	5000 K	satined	23,9 W	3784 lm	1424x42x56 mm
RegaLED 22-1424 M1K	81022503015	5000 K	satined	23,9 W	3784 lm	1424x42x56 mm

RegaLED Plug & socket on the Cable



Series luminaire with plug and socket on the cable (2K), magnet mounting (M2K) or clamp (K2K) possible, different light colours are available, other light colours on request, different wattages, different lengths, various covers, protection category IP20, ENEC certified

Type	Article Number	Light Colour	Optic	System Outout	Luminous Flux System	Dimension
RegaLED 10-584 M2K	81010403009	4000 K	satined	11,2 W	1514 lm	584x42x56 mm
RegaLED 13-864 K2K	81013303000	3000 K	clear	15,0 W	2357 lm	864x42x56 mm
RegaLED 13-864 M2K	81013303001	3000 K	clear	15,0 W	2357 lm	864x42x56 mm
RegaLED 13-864 K2K	81013303008	3000 K	satined	15,0 W	2138 lm	864x42x56 mm
RegaLED 13-864 M2K	81013303009	3000 K	satined	15,0 W	2138 lm	864x42x56 mm
RegaLED 13-864 K2K	81013403000	4000 K	clear	15,0 W	2503 lm	864x42x56 mm
RegaLED 13-864 M2K	81013403001	4000 K	clear	15,0 W	2503 lm	864x42x56 mm
RegaLED 13-864 K2K	81013403008	4000 K	satined	15,0 W	2270 lm	864x42x56 mm
RegaLED 13-864 M2K	81013403009	4000 K	satined	15,0 W	2270 lm	864x42x56 mm
RegaLED 13-864 K2K	81013503000	5000 K	clear	15,0 W	2503 lm	864x42x56 mm
RegaLED 13-864 M2K	81013503001	5000 K	clear	15,0 W	2503 lm	864x42x56 mm
RegaLED 13-864 K2K	81013503008	5000 K	satined	15,0 W	2270 lm	864x42x56 mm
RegaLED 13-864 M2K	81013503009	5000 K	satined	15,0 W	2270 lm	864x42x56 mm
RegaLED 17-1144 K2K	81017303000	3000 K	clear	19,5 W	3143 lm	1144x42x56 mm
RegaLED 17-1144 M2K	81017303001	3000 K	clear	19,5 W	3143 lm	1144x42x56 mm
RegaLED 17-1144 K2K	81017303008	3000 K	satined	19,5 W	2851 lm	1144x42x56 mm
RegaLED 17-1144 M2K	81017303009	3000 K	satined	19,5 W	2851 lm	1144x42x56 mm
RegaLED 17-1144 K2K	81017403000	4000 K	clear	19,5 W	3337 lm	1144x42x56 mm
RegaLED 17-1144 M2K	81017403001	4000 K	clear	19,5 W	3337 lm	1144x42x56 mm
RegaLED 17-1144 K2K	81017403008	4000 K	satined	19,5 W	3027 lm	1144x42x56 mm
RegaLED 17-1144 M2K	81017403009	4000 K	satined	19,5 W	3027 lm	1144x42x56 mm
RegaLED 17-1144 K2K	81017503000	5000 K	clear	19,5 W	3337 lm	1144x42x56 mm
RegaLED 17-1144 M2K	81017503001	5000 K	clear	19,5 W	3337 lm	1144x42x56 mm
RegaLED 17-1144 K2K	81017503008	5000 K	satined	19,5 W	3027 lm	1144x42x56 mm
RegaLED 17-1144 M2K	81017503009	5000 K	satined	19,5 W	3027 lm	1144x42x56 mm
RegaLED 22-1424 K2K	81022303000	3000 K	clear	23,9 W	3929 lm	1144x42x56 mm
RegaLED 22-1424 M2K	81022303001	3000 K	clear	23,9 W	3929 lm	1144x42x56 mm
RegaLED 22-1424 K2K	81022303008	3000 K	satined	23,9 W	3564 lm	1144x42x56 mm
RegaLED 22-1424 M2K	81022303009	3000 K	satined	23,9 W	3564 lm	1424x42x56 mm
RegaLED 22-1424 K2K	81022403000	4000 K	clear	23,9 W	4171 lm	1424x42x56 mm
RegaLED 22-1424 M2K	81022403001	4000 K	clear	23,9 W	4171 lm	1424x42x56 mm
RegaLED 22-1424 K2K	81022403008	4000 K	satined	23,9 W	3784 lm	1424x42x56 mm
RegaLED 22-1424 M2K	81022403009	4000 K	satined	23,9 W	3784 lm	1424x42x56 mm
RegaLED 22-1424 K2K	81022503000	5000 K	clear	23,9 W	4171 lm	1424x42x56 mm
RegaLED 22-1424 M2K	81022503001	5000 K	clear	23,9 W	4171 lm	1424x42x56 mm
RegaLED 22-1424 K2K	81022503008	5000 K	satined	23,9 W	3784 lm	1424x42x56 mm
RegaLED 22-1424 M2K	81022503009	5000 K	satined	23,9 W	3784 lm	1424x42x56 mm

ChangeLED

continuous-row and renovation luminaire for special requirements in sales areas, warehouses, production and general lighting

can be used in the existing mounting rails by various manufacturers or in its own mounting rail system

3-row LEDs

different optics (60°, 90°, 110°)

energy efficiency class A

system luminous flux up to 180 lumens per watt

5-, 7-pole and 11-pole with through-wiring

DALI-dimmable & building management & emergency lighting

tight colour tolerance MacAdam 3

very good colour rendering CRI type. 80

light colours 3.000 K, 4.000 K & 5.000 K

5-years system guarantee / service life > 60.000 hours

ENEC certified

Protection category IP20 / protection class I

high-quality connection system

colour white

special designs upon customer request / various accessories available



ChangeLED 3R



LED continuous-row and renovation segment, 3-row LEDs, clamps for various trunking systems, different light colours are available, other light colours on request, different wattages, different lengths, other optics on request, protection category IP20, ENEC certified

Type	Article Number	Light Colour	Optic	System Output	Luminous Flux System	Dimension
ChangeLED 3R 26-2007	55263006000	3000 K	60°	26,3 W	4562 lm	2007x70x35 mm
ChangeLED 3R 26-2007	55263009000	3000 K	90°	26,3 W	4562 lm	2007x70x35 mm
ChangeLED 3R 26-2007	55263011000	3000 K	110°	26,3 W	4562 lm	2007x70x35 mm
ChangeLED 3R 26-2007	55264006000	4000 K	60°	26,3 W	4861 lm	2007x70x35 mm
ChangeLED 3R 26-2007	55264009000	4000 K	90°	26,3 W	4861 lm	2007x70x35 mm
ChangeLED 3R 26-2007	55264011000	4000 K	110°	26,3 W	4861 lm	2007x70x35 mm
ChangeLED 3R 26-2007	55265006000	5000 K	60°	26,3 W	4861 lm	2007x70x35 mm
ChangeLED 3R 26-2007	55265009000	5000 K	90°	26,3 W	4861 lm	2007x70x35 mm
ChangeLED 3R 26-2007	55265011000	5000 K	110°	26,3 W	4861 lm	2007x70x35 mm
ChangeLED 3R 30-2007	55303006000	3000 K	60°	30,6 W	5270 lm	2007x70x35 mm
ChangeLED 3R 30-2007	55303009000	3000 K	90°	30,6 W	5270 lm	2007x70x35 mm
ChangeLED 3R 30-2007	55303011000	3000 K	110°	30,6 W	5270 lm	2007x70x35 mm
ChangeLED 3R 30-2007	55304006000	4000 K	60°	30,6 W	5616 lm	2007x70x35 mm
ChangeLED 3R 30-2007	55304009000	4000 K	90°	30,6 W	5616 lm	2007x70x35 mm
ChangeLED 3R 30-2007	55304011000	4000 K	110°	30,6 W	5616 lm	2007x70x35 mm
ChangeLED 3R 30-2007	55305006000	5000 K	60°	30,6 W	5616 lm	2007x70x35 mm
ChangeLED 3R 30-2007	55305009000	5000 K	90°	30,6 W	5616 lm	2007x70x35 mm
ChangeLED 3R 30-2007	55305011000	5000 K	110°	30,6 W	5616 lm	2007x70x35 mm
ChangeLED 3R 39-2007	55393006000	3000 K	60°	39,1 W	6517 lm	2007x70x35 mm
ChangeLED 3R 39-2007	55393009000	3000 K	90°	39,1 W	6517 lm	2007x70x35 mm
ChangeLED 3R 39-2007	55393011000	3000 K	110°	39,1 W	6517 lm	2007x70x35 mm
ChangeLED 3R 39-2007	55394006000	4000 K	60°	39,1 W	6933 lm	2007x70x35 mm
ChangeLED 3R 39-2007	55394009000	4000 K	90°	39,1 W	6933 lm	2007x70x35 mm
ChangeLED 3R 39-2007	55394011000	4000 K	110°	39,1 W	6933 lm	2007x70x35 mm
ChangeLED 3R 39-2007	55395006000	5000 K	60°	39,1 W	6933 lm	2007x70x35 mm
ChangeLED 3R 39-2007	55395009000	5000 K	90°	39,1 W	6933 lm	2007x70x35 mm
ChangeLED 3R 39-2007	55395011000	5000 K	110°	39,1 W	6933 lm	2007x70x35 mm
ChangeLED 3R 44-2007	55443006000	3000 K	60°	44,3 W	7398 lm	2007x70x35 mm
ChangeLED 3R 44-2007	55443009000	3000 K	90°	44,3 W	7398 lm	2007x70x35 mm
ChangeLED 3R 44-2007	55443011000	3000 K	110°	44,3 W	7398 lm	2007x70x35 mm
ChangeLED 3R 44-2007	55444006000	4000 K	60°	44,3 W	7880 lm	2007x70x35 mm
ChangeLED 3R 44-2007	55444009000	4000 K	90°	44,3 W	7880 lm	2007x70x35 mm
ChangeLED 3R 44-2007	55444011000	4000 K	110°	44,3 W	7880 lm	2007x70x35 mm
ChangeLED 3R 44-2007	55445006000	5000 K	60°	44,3 W	7880 lm	2007x70x35 mm
ChangeLED 3R 44-2007	55445009000	5000 K	90°	44,3 W	7880 lm	2007x70x35 mm
ChangeLED 3R 44-2007	55445011000	5000 K	110°	44,3 W	7880 lm	2007x70x35 mm
ChangeLED 3R 55-2007	55553006000	3000 K	60°	55,9 W	9144 lm	2007x70x35 mm
ChangeLED 3R 55-2007	55553009000	3000 K	90°	55,9 W	9144 lm	2007x70x35 mm
ChangeLED 3R 55-2007	55553011000	3000 K	110°	55,9 W	9144 lm	2007x70x35 mm
ChangeLED 3R 55-2007	55554006000	4000 K	60°	55,9 W	9742 lm	2007x70x35 mm
ChangeLED 3R 55-2007	55554009000	4000 K	90°	55,9 W	9742 lm	2007x70x35 mm
ChangeLED 3R 55-2007	55554011000	4000 K	110°	55,9 W	9742 lm	2007x70x35 mm
ChangeLED 3R 55-2007	55555006000	5000 K	60°	55,9 W	9742 lm	2007x70x35 mm

ChangeLED 3R 55-2007	55555009000	5000 K	90°	55,9 W	9742 lm	2007x70x35 mm
ChangeLED 3R 55-2007	55555011000	5000 K	110°	55,9 W	9742 lm	2007x70x35 mm
ChangeLED 3R 67-2007	55673006000	3000 K	60°	67,9 W	10873 lm	2007x70x35 mm
ChangeLED 3R 67-2007	55673009000	3000 K	90°	67,9 W	10873 lm	2007x70x35 mm
ChangeLED 3R 67-2007	55673011000	3000 K	110°	67,9 W	10873 lm	2007x70x35 mm
ChangeLED 3R 67-2007	55674006000	4000 K	60°	67,9 W	11604 lm	2007x70x35 mm
ChangeLED 3R 67-2007	55674009000	4000 K	90°	67,9 W	11604 lm	2007x70x35 mm
ChangeLED 3R 67-2007	55674011000	4000 K	110°	67,9 W	11604 lm	2007x70x35 mm
ChangeLED 3R 67-2007	55675006000	5000 K	60°	67,9 W	11604 lm	2007x70x35 mm
ChangeLED 3R 67-2007	55675009000	5000 K	90°	67,9 W	11604 lm	2007x70x35 mm
ChangeLED 3R 67-2007	55675011000	5000 K	110°	67,9 W	11604 lm	2007x70x35 mm
ChangeLED 3R 80-2007	55803006000	3000 K	60°	80,0 W	12585 lm	2007x70x35 mm
ChangeLED 3R 80-2007	55803009000	3000 K	90°	80,0 W	12585 lm	2007x70x35 mm
ChangeLED 3R 80-2007	55803011000	3000 K	110°	80,0 W	12585 lm	2007x70x35 mm
ChangeLED 3R 80-2007	55804006000	4000 K	60°	80,0 W	13383 lm	2007x70x35 mm
ChangeLED 3R 80-2007	55804009000	4000 K	90°	80,0 W	13383 lm	2007x70x35 mm
ChangeLED 3R 80-2007	55804011000	4000 K	110°	80,0 W	13383 lm	2007x70x35 mm
ChangeLED 3R 80-2007	55805006000	5000 K	60°	80,0 W	13383 lm	2007x70x35 mm
ChangeLED 3R 80-2007	55805009000	5000 K	90°	80,0 W	13383 lm	2007x70x35 mm
ChangeLED 3R 80-2007	55805011000	5000 K	110°	80,0 W	13383 lm	2007x70x35 mm
ChangeLED 3R 19-1525	55203006005	3000 K	60°	19,2 W	3259 lm	1525x70x35 mm
ChangeLED 3R 19-1525	55203009005	3000 K	90°	19,2 W	3259 lm	1525x70x35 mm
ChangeLED 3R 19-1525	55203011005	3000 K	110°	19,2 W	3259 lm	1525x70x35 mm
ChangeLED 3R 19-1525	55204006005	4000 K	60°	19,2 W	3472 lm	1525x70x35 mm
ChangeLED 3R 19-1525	55204009005	4000 K	90°	19,2 W	3472 lm	1525x70x35 mm
ChangeLED 3R 19-1525	55204011005	4000 K	110°	19,2 W	3472 lm	1525x70x35 mm
ChangeLED 3R 19-1525	55205006005	5000 K	60°	19,2 W	3472 lm	1525x70x35 mm
ChangeLED 3R 19-1525	55205009005	5000 K	90°	19,2 W	3472 lm	1525x70x35 mm
ChangeLED 3R 19-1525	55205011005	5000 K	110°	19,2 W	3472 lm	1525x70x35 mm
ChangeLED 3R 22-1525	55223006005	3000 K	60°	22,2 W	3764 lm	1525x70x35 mm
ChangeLED 3R 22-1525	55223009005	3000 K	90°	22,2 W	3764 lm	1525x70x35 mm
ChangeLED 3R 22-1525	55223011005	3000 K	110°	22,2 W	3764 lm	1525x70x35 mm
ChangeLED 3R 22-1525	55224006005	4000 K	60°	22,2 W	4011 lm	1525x70x35 mm
ChangeLED 3R 22-1525	55224009005	4000 K	90°	22,2 W	4011 lm	1525x70x35 mm
ChangeLED 3R 22-1525	55224011005	4000 K	110°	22,2 W	4011 lm	1525x70x35 mm
ChangeLED 3R 22-1525	55225006005	5000 K	60°	22,2 W	4011 lm	1525x70x35 mm
ChangeLED 3R 22-1525	55225009005	5000 K	90°	22,2 W	4011 lm	1525x70x35 mm
ChangeLED 3R 22-1525	55225011005	5000 K	110°	22,2 W	4011 lm	1525x70x35 mm
ChangeLED 3R 32-1525	55323006005	3000 K	60°	32,2 W	5284 lm	1525x70x35 mm
ChangeLED 3R 32-1525	55323009005	3000 K	90°	32,2 W	5284 lm	1525x70x35 mm
ChangeLED 3R 32-1525	55323011005	3000 K	110°	32,2 W	5284 lm	1525x70x35 mm
ChangeLED 3R 32-1525	55324006005	4000 K	60°	32,2 W	5629 lm	1525x70x35 mm
ChangeLED 3R 32-1525	55324009005	4000 K	90°	32,2 W	5629 lm	1525x70x35 mm
ChangeLED 3R 32-1525	55324011005	4000 K	110°	32,2 W	5629 lm	1525x70x35 mm
ChangeLED 3R 32-1525	55325006005	5000 K	60°	32,2 W	5629 lm	1525x70x35 mm
ChangeLED 3R 32-1525	55325009005	5000 K	90°	32,2 W	5629 lm	1525x70x35 mm

ChangeLED 3R 32-1525	55325011005	5000 K	110°	32,2 W	5629 lm	1525x70x35 mm
ChangeLED 3R 40-1525	55403006005	3000 K	60°	40,4 W	6531 lm	1525x70x35 mm
ChangeLED 3R 40-1525	55403009005	3000 K	90°	40,4 W	6531 lm	1525x70x35 mm
ChangeLED 3R 40-1525	55403011005	3000 K	110°	40,4 W	6531 lm	1525x70x35 mm
ChangeLED 3R 40-1525	55404006005	4000 K	60°	40,4 W	6959 lm	1525x70x35 mm
ChangeLED 3R 40-1525	55404009005	4000 K	90°	40,4 W	6959 lm	1525x70x35 mm
ChangeLED 3R 40-1525	55404011005	4000 K	110°	40,4 W	6959 lm	1525x70x35 mm
ChangeLED 3R 40-1525	55405006005	5000 K	60°	40,4 W	6959 lm	1525x70x35 mm
ChangeLED 3R 40-1525	55405009005	5000 K	90°	40,4 W	6959 lm	1525x70x35 mm
ChangeLED 3R 40-1525	55405011005	5000 K	110°	40,4 W	6959 lm	1525x70x35 mm
ChangeLED 3R 49-1525	55493006005	3000 K	60°	49,1 W	7766 lm	1525x70x35 mm
ChangeLED 3R 49-1525	55493009005	3000 K	90°	49,1 W	7766 lm	1525x70x35 mm
ChangeLED 3R 49-1525	55493011005	3000 K	110°	49,1 W	7766 lm	1525x70x35 mm
ChangeLED 3R 49-1525	55494006005	4000 K	60°	49,1 W	8289 lm	1525x70x35 mm
ChangeLED 3R 49-1525	55494009005	4000 K	90°	49,1 W	8289 lm	1525x70x35 mm
ChangeLED 3R 49-1525	55494011005	4000 K	110°	49,1 W	8289 lm	1525x70x35 mm
ChangeLED 3R 49-1525	55495006005	5000 K	60°	49,1 W	8289 lm	1525x70x35 mm
ChangeLED 3R 49-1525	55495009005	5000 K	90°	49,1 W	8289 lm	1525x70x35 mm
ChangeLED 3R 49-1525	55495011005	5000 K	110°	49,1 W	8289 lm	1525x70x35 mm
ChangeLED 3R 57-1525	55583006005	3000 K	60°	57,7 W	8989 lm	1525x70x35 mm
ChangeLED 3R 57-1525	55583009005	3000 K	90°	57,7 W	8989 lm	1525x70x35 mm
ChangeLED 3R 57-1525	55583011005	3000 K	110°	57,7 W	8989 lm	1525x70x35 mm
ChangeLED 3R 57-1525	55584006005	4000 K	60°	57,7 W	9559 lm	1525x70x35 mm
ChangeLED 3R 57-1525	55584009005	4000 K	90°	57,7 W	9559 lm	1525x70x35 mm
ChangeLED 3R 57-1525	55584011005	4000 K	110°	57,7 W	9559 lm	1525x70x35 mm
ChangeLED 3R 57-1525	55585006005	5000 K	60°	57,7 W	9559 lm	1525x70x35 mm
ChangeLED 3R 57-1525	55585009005	5000 K	90°	57,7 W	9559 lm	1525x70x35 mm
ChangeLED 3R 57-1525	55585011005	5000 K	110°	57,7 W	9559 lm	1525x70x35 mm

ChangeLED 3R DALI



LED continuous-row and renovation segment, 3-row LED modules with optics, DALI-dimmable and can be integrated into building management systems, clamps for various trunking systems, different light colours are available, other light colours on request, different wattages, different lengths, various optics, protection category IP20, ENEC certified, can be integrated into emergency lighting

Type	Article Number	Light Colour	Optic	System Output	Luminous Flux System	Dimension
ChangeLED 3R 27-2007 DALI	57273006000	3000 K	60°	26,3 W	4562 lm	2007x70x35 mm
ChangeLED 3R 27-2007 DALI	57273009000	3000 K	90°	26,3 W	4562 lm	2007x70x35 mm
ChangeLED 3R 27-2007 DALI	57273011000	3000 K	110°	26,3 W	4562 lm	2007x70x35 mm
ChangeLED 3R 27-2007 DALI	57274006000	4000 K	60°	26,3 W	4861 lm	2007x70x35 mm
ChangeLED 3R 27-2007 DALI	57274009000	4000 K	90°	26,3 W	4861 lm	2007x70x35 mm
ChangeLED 3R 27-2007 DALI	57274011000	4000 K	110°	26,3 W	4861 lm	2007x70x35 mm
ChangeLED 3R 27-2007 DALI	57275006000	5000 K	60°	26,3 W	4861 lm	2007x70x35 mm
ChangeLED 3R 27-2007 DALI	57275009000	5000 K	90°	26,3 W	4861 lm	2007x70x35 mm
ChangeLED 3R 27-2007 DALI	57275011000	5000 K	110°	26,3 W	4861 lm	2007x70x35 mm
ChangeLED 3R 34-2007 DALI	57343006000	3000 K	60°	33,5 W	5619 lm	2007x70x35 mm
ChangeLED 3R 34-2007 DALI	57343009000	3000 K	90°	33,5 W	5619 lm	2007x70x35 mm
ChangeLED 3R 34-2007 DALI	57343011000	3000 K	110°	33,5 W	5619 lm	2007x70x35 mm
ChangeLED 3R 34-2007 DALI	57344006000	4000 K	60°	33,5 W	5985 lm	2007x70x35 mm
ChangeLED 3R 34-2007 DALI	57344009000	4000 K	90°	33,5 W	5985 lm	2007x70x35 mm
ChangeLED 3R 34-2007 DALI	57344011000	4000 K	110°	33,5 W	5985 lm	2007x70x35 mm
ChangeLED 3R 34-2007 DALI	57345006000	5000 K	60°	33,5 W	5985 lm	2007x70x35 mm
ChangeLED 3R 34-2007 DALI	57345009000	5000 K	90°	33,5 W	5985 lm	2007x70x35 mm
ChangeLED 3R 34-2007 DALI	57345011000	5000 K	110°	33,5 W	5985 lm	2007x70x35 mm
ChangeLED 3R 40-2007 DALI	57403006000	3000 K	60°	39,6 W	6517 lm	2007x70x35 mm
ChangeLED 3R 40-2007 DALI	57403009000	3000 K	90°	39,6 W	6517 lm	2007x70x35 mm
ChangeLED 3R 40-2007 DALI	57403011000	3000 K	110°	39,6 W	6517 lm	2007x70x35 mm
ChangeLED 3R 40-2007 DALI	57404006000	4000 K	60°	39,6 W	6933 lm	2007x70x35 mm
ChangeLED 3R 40-2007 DALI	57404009000	4000 K	90°	39,6 W	6933 lm	2007x70x35 mm
ChangeLED 3R 40-2007 DALI	57404011000	4000 K	110°	39,6 W	6933 lm	2007x70x35 mm
ChangeLED 3R 40-2007 DALI	57405006000	5000 K	60°	39,6 W	6933 lm	2007x70x35 mm
ChangeLED 3R 40-2007 DALI	57405009000	5000 K	90°	39,6 W	6933 lm	2007x70x35 mm
ChangeLED 3R 40-2007 DALI	57405011000	5000 K	110°	39,6 W	6933 lm	2007x70x35 mm
ChangeLED 3R 45-2007 DALI	57453006000	3000 K	60°	44,8 W	7398 lm	2007x70x35 mm
ChangeLED 3R 45-2007 DALI	57453009000	3000 K	90°	44,8 W	7398 lm	2007x70x35 mm
ChangeLED 3R 45-2007 DALI	57453011000	3000 K	110°	44,8 W	7398 lm	2007x70x35 mm
ChangeLED 3R 45-2007 DALI	57454006000	4000 K	60°	44,8 W	7880 lm	2007x70x35 mm
ChangeLED 3R 45-2007 DALI	57454009000	4000 K	90°	44,8 W	7880 lm	2007x70x35 mm
ChangeLED 3R 45-2007 DALI	57454011000	4000 K	110°	44,8 W	7880 lm	2007x70x35 mm
ChangeLED 3R 45-2007 DALI	57455006000	5000 K	60°	44,8 W	7880 lm	2007x70x35 mm
ChangeLED 3R 45-2007 DALI	57455009000	5000 K	90°	44,8 W	7880 lm	2007x70x35 mm
ChangeLED 3R 45-2007 DALI	57455011000	5000 K	110°	44,8 W	7880 lm	2007x70x35 mm
ChangeLED 3R 56-2007 DALI	57563006000	3000 K	60°	56,2 W	9144 lm	2007x70x35 mm
ChangeLED 3R 56-2007 DALI	57563009000	3000 K	90°	56,2 W	9144 lm	2007x70x35 mm
ChangeLED 3R 56-2007 DALI	57563011000	3000 K	110°	56,2 W	9144 lm	2007x70x35 mm
ChangeLED 3R 56-2007 DALI	57564006000	4000 K	60°	56,2 W	9742 lm	2007x70x35 mm
ChangeLED 3R 56-2007 DALI	57564009000	4000 K	90°	56,2 W	9742 lm	2007x70x35 mm
ChangeLED 3R 56-2007 DALI	57564011000	4000 K	110°	56,2 W	9742 lm	2007x70x35 mm
ChangeLED 3R 56-2007 DALI	57565006000	5000 K	60°	56,2 W	9742 lm	2007x70x35 mm
ChangeLED 3R 56-2007 DALI	57565009000	5000 K	90°	56,2 W	9742 lm	2007x70x35 mm

ChangeLED 3R 56-2007 DALI	57565011000	5000 K	110°	56,2 W	9742 lm	2007x70x35 mm
ChangeLED 3R 68-2007 DALI	57683006000	3000 K	60°	68,9 W	10873 lm	2007x70x35 mm
ChangeLED 3R 68-2007 DALI	57683009000	3000 K	90°	68,9 W	10873 lm	2007x70x35 mm
ChangeLED 3R 68-2007 DALI	57683011000	3000 K	110°	68,9 W	10873 lm	2007x70x35 mm
ChangeLED 3R 68-2007 DALI	57684006000	4000 K	60°	68,9 W	11604 lm	2007x70x35 mm
ChangeLED 3R 68-2007 DALI	57684009000	4000 K	90°	68,9 W	11604 lm	2007x70x35 mm
ChangeLED 3R 68-2007 DALI	57684011000	4000 K	110°	68,9 W	11604 lm	2007x70x35 mm
ChangeLED 3R 68-2007 DALI	57685006000	5000 K	60°	68,9 W	11604 lm	2007x70x35 mm
ChangeLED 3R 68-2007 DALI	57685009000	5000 K	90°	68,9 W	11604 lm	2007x70x35 mm
ChangeLED 3R 68-2007 DALI	57685011000	5000 K	110°	68,9 W	11604 lm	2007x70x35 mm
ChangeLED 3R 81-2007 DALI	57813006000	3000 K	60°	80,5 W	12585 lm	2007x70x35 mm
ChangeLED 3R 81-2007 DALI	57813009000	3000 K	90°	80,5 W	12585 lm	2007x70x35 mm
ChangeLED 3R 81-2007 DALI	57813011000	3000 K	110°	80,5 W	12585 lm	2007x70x35 mm
ChangeLED 3R 81-2007 DALI	57814006000	4000 K	60°	80,5 W	13383 lm	2007x70x35 mm
ChangeLED 3R 81-2007 DALI	57814009000	4000 K	90°	80,5 W	13383 lm	2007x70x35 mm
ChangeLED 3R 81-2007 DALI	57814011000	4000 K	110°	80,5 W	13383 lm	2007x70x35 mm
ChangeLED 3R 81-2007 DALI	57815006000	5000 K	60°	80,5 W	13383 lm	2007x70x35 mm
ChangeLED 3R 81-2007 DALI	57815009000	5000 K	90°	80,5 W	13383 lm	2007x70x35 mm
ChangeLED 3R 81-2007 DALI	57815011000	5000 K	110°	80,5 W	13383 lm	2007x70x35 mm
ChangeLED 3R 20-1525 DALI	57213006005	3000 K	60°	20,1 W	3259 lm	1525x70x35 mm
ChangeLED 3R 20-1525 DALI	57213009005	3000 K	90°	20,1 W	3259 lm	1525x70x35 mm
ChangeLED 3R 20-1525 DALI	57213011005	3000 K	110°	20,1 W	3259 lm	1525x70x35 mm
ChangeLED 3R 20-1525 DALI	57214006005	4000 K	60°	20,1 W	3472 lm	1525x70x35 mm
ChangeLED 3R 20-1525 DALI	57214009005	4000 K	90°	20,1 W	3472 lm	1525x70x35 mm
ChangeLED 3R 20-1525 DALI	57214011005	4000 K	110°	20,1 W	3472 lm	1525x70x35 mm
ChangeLED 3R 20-1525 DALI	57215006005	5000 K	60°	20,1 W	3472 lm	1525x70x35 mm
ChangeLED 3R 20-1525 DALI	57215009005	5000 K	90°	20,1 W	3472 lm	1525x70x35 mm
ChangeLED 3R 20-1525 DALI	57215011005	5000 K	110°	20,1 W	3472 lm	1525x70x35 mm
ChangeLED 3R 25-1525 DALI	57253006005	3000 K	60°	24,7 W	4014 lm	1525x70x35 mm
ChangeLED 3R 25-1525 DALI	57253009005	3000 K	90°	24,7 W	4014 lm	1525x70x35 mm
ChangeLED 3R 25-1525 DALI	57253011005	3000 K	110°	24,7 W	4014 lm	1525x70x35 mm
ChangeLED 3R 25-1525 DALI	57254006005	4000 K	60°	24,7 W	4275 lm	1525x70x35 mm
ChangeLED 3R 25-1525 DALI	57254009005	4000 K	90°	24,7 W	4275 lm	1525x70x35 mm
ChangeLED 3R 25-1525 DALI	57254011005	4000 K	110°	24,7 W	4275 lm	1525x70x35 mm
ChangeLED 3R 25-1525 DALI	57255006005	5000 K	60°	24,7 W	4275 lm	1525x70x35 mm
ChangeLED 3R 25-1525 DALI	57255009005	5000 K	90°	24,7 W	4275 lm	1525x70x35 mm
ChangeLED 3R 25-1525 DALI	57255011005	5000 K	110°	24,7 W	4275 lm	1525x70x35 mm
ChangeLED 3R 33-1525 DALI	57333006005	3000 K	60°	32,9 W	5284 lm	1525x70x35 mm
ChangeLED 3R 33-1525 DALI	57333009005	3000 K	90°	32,9 W	5284 lm	1525x70x35 mm
ChangeLED 3R 33-1525 DALI	57333011005	3000 K	110°	32,9 W	5284 lm	1525x70x35 mm
ChangeLED 3R 33-1525 DALI	57334006005	4000 K	60°	32,9 W	5629 lm	1525x70x35 mm
ChangeLED 3R 33-1525 DALI	57334009005	4000 K	90°	32,9 W	5629 lm	1525x70x35 mm
ChangeLED 3R 33-1525 DALI	57334011005	4000 K	110°	32,9 W	5629 lm	1525x70x35 mm
ChangeLED 3R 33-1525 DALI	57335006005	5000 K	60°	32,9 W	5629 lm	1525x70x35 mm
ChangeLED 3R 33-1525 DALI	57335009005	5000 K	90°	32,9 W	5629 lm	1525x70x35 mm
ChangeLED 3R 33-1525 DALI	57335011005	5000 K	110°	32,9 W	5629 lm	1525x70x35 mm

ChangeLED 3R 41-1525 DALI	57413006005	3000 K	60°	41,3 W	6531 lm	1525x70x35 mm
ChangeLED 3R 41-1525 DALI	57413009005	3000 K	90°	41,3 W	6531 lm	1525x70x35 mm
ChangeLED 3R 41-1525 DALI	57413011005	3000 K	110°	41,3 W	6531 lm	1525x70x35 mm
ChangeLED 3R 41-1525 DALI	57414006005	4000 K	60°	41,3 W	6959 lm	1525x70x35 mm
ChangeLED 3R 41-1525 DALI	57414009005	4000 K	90°	41,3 W	6959 lm	1525x70x35 mm
ChangeLED 3R 41-1525 DALI	57414011005	4000 K	110°	41,3 W	6959 lm	1525x70x35 mm
ChangeLED 3R 41-1525 DALI	57415006005	5000 K	60°	41,3 W	6959 lm	1525x70x35 mm
ChangeLED 3R 41-1525 DALI	57415009005	5000 K	90°	41,3 W	6959 lm	1525x70x35 mm
ChangeLED 3R 41-1525 DALI	57415011005	5000 K	110°	41,3 W	6959 lm	1525x70x35 mm
ChangeLED 3R 50-1525 DALI	57503006005	3000 K	60°	50,0 W	7766 lm	1525x70x35 mm
ChangeLED 3R 50-1525 DALI	57503009005	3000 K	90°	50,0 W	7766 lm	1525x70x35 mm
ChangeLED 3R 50-1525 DALI	57503011005	3000 K	110°	50,0 W	7766 lm	1525x70x35 mm
ChangeLED 3R 50-1525 DALI	57504006005	4000 K	60°	50,0 W	8289 lm	1525x70x35 mm
ChangeLED 3R 50-1525 DALI	57504009005	4000 K	90°	50,0 W	8289 lm	1525x70x35 mm
ChangeLED 3R 50-1525 DALI	57504011005	4000 K	110°	50,0 W	8289 lm	1525x70x35 mm
ChangeLED 3R 50-1525 DALI	57500506005	5000 K	60°	50,0 W	8289 lm	1525x70x35 mm
ChangeLED 3R 50-1525 DALI	57500509005	5000 K	90°	50,0 W	8289 lm	1525x70x35 mm
ChangeLED 3R 50-1525 DALI	57500511005	5000 K	110°	50,0 W	8289 lm	1525x70x35 mm
ChangeLED 3R 58-1525 DALI	57593006005	3000 K	60°	58,3 W	8989 lm	1525x70x35 mm
ChangeLED 3R 58-1525 DALI	57593009005	3000 K	90°	58,3 W	8989 lm	1525x70x35 mm
ChangeLED 3R 58-1525 DALI	57593011005	3000 K	110°	58,3 W	8989 lm	1525x70x35 mm
ChangeLED 3R 58-1525 DALI	57594006005	4000 K	60°	58,3 W	9559 lm	1525x70x35 mm
ChangeLED 3R 58-1525 DALI	57594009005	4000 K	90°	58,3 W	9559 lm	1525x70x35 mm
ChangeLED 3R 58-1525 DALI	57594011005	4000 K	110°	58,3 W	9559 lm	1525x70x35 mm
ChangeLED 3R 58-1525 DALI	57595006005	5000 K	60°	58,3 W	9559 lm	1525x70x35 mm
ChangeLED 3R 58-1525 DALI	57595009005	5000 K	90°	58,3 W	9559 lm	1525x70x35 mm
ChangeLED 3R 58-1525 DALI	57595011005	5000 K	110°	58,3 W	9559 lm	1525x70x35 mm

TrackLED

Continuous-row and renovation luminaires for special requirements in sales areas, warehouses, production and general lighting

mounted in a busbar adapter

3-row LEDs

different optics 110 °

Energy efficiency class A

System luminous flux up to 185 lumens per watt

3-pole with ---

close colour tolerance MacAdam3

very good colour rendering CRI > 80

Light colours 3.000 K, 4.000 K & 5.000 K

5 year system guarantee

Service life > 54.000 hours

Protection category IP 20

Protection class I

High quality busbar adapter

colour white RAL 9016

Special designs on customer request

various accessories available

Type	Article Number	Light Colour	Optic	System Output	Luminous Flux System	Dimension
TrackLED 12-860	02123011380	3000K	110°	11,5 W	1955 lm	860x70x50 mm
TrackLED 12-860	02124011380	4000K	110°	11,5 W	2083 lm	860x70x50 mm
TrackLED 12-860	02125011380	5000K	110°	11,5 W	2083 lm	860x70x50 mm
TrackLED 12-860	02123011381	3000K	110°	11,5 W	1955 lm	860x70x50 mm
TrackLED 12-860	02124011381	4000K	110°	11,5 W	2083 lm	860x70x50 mm
TrackLED 12-860	02125011381	5000K	110°	11,5 W	2083 lm	860x70x50 mm
TrackLED 12-860	02123011382	3000K	110°	11,5 W	1955 lm	860x70x50 mm
TrackLED 12-860	02124011382	4000K	110°	11,5 W	2083 lm	860x70x50 mm
TrackLED 12-860	02125011382	5000K	110°	11,5 W	2083 lm	860x70x50 mm
TrackLED 17-860	02173011380	3000K	110°	17,1 W	2793 lm	860x70x50 mm
TrackLED 17-860	02174011380	4000K	110°	17,1 W	2971 lm	860x70x50 mm
TrackLED 17-860	02175011380	5000K	110°	17,1 W	2971 lm	860x70x50 mm
TrackLED 17-860	02173011381	3000K	110°	17,1 W	2793 lm	860x70x50 mm
TrackLED 17-860	02174011381	4000K	110°	17,1 W	2971 lm	860x70x50 mm
TrackLED 17-860	02175011381	5000K	110°	17,1 W	2971 lm	860x70x50 mm
TrackLED 17-860	02173011382	3000K	110°	17,1 W	2793 lm	860x70x50 mm
TrackLED 17-860	02174011382	4000K	110°	17,1 W	2971 lm	860x70x50 mm
TrackLED 17-860	02175011382	5000K	110°	17,1 W	2971 lm	860x70x50 mm
TrackLED 20-860	02203011380	3000K	110°	19,4 W	3171 lm	860x70x50 mm
TrackLED 20-860	02204011380	4000K	110°	19,4 W	3377 lm	860x70x50 mm
TrackLED 20-860	02205011380	5000K	110°	19,4 W	3377 lm	860x70x50 mm
TrackLED 20-860	02203011381	3000K	110°	19,4 W	3171 lm	860x70x50 mm
TrackLED 20-860	02204011381	4000K	110°	19,4 W	3377 lm	860x70x50 mm
TrackLED 20-860	02205011381	5000K	110°	19,4 W	3377 lm	860x70x50 mm
TrackLED 20-860	02203011382	3000K	110°	19,4 W	3171 lm	860x70x50 mm
TrackLED 20-860	02204011382	4000K	110°	19,4 W	3377 lm	860x70x50 mm
TrackLED 20-860	02205011382	5000K	110°	19,4 W	3377 lm	860x70x50 mm
TrackLED 25-860	02253011380	3000K	110°	24,5 W	3919 lm	860x70x50 mm
TrackLED 25-860	02254011380	4000K	110°	24,5 W	4175 lm	860x70x50 mm
TrackLED 25-860	02255011380	5000K	110°	24,5 W	4175 lm	860x70x50 mm
TrackLED 25-860	02253011381	3000K	110°	24,5 W	3919 lm	860x70x50 mm
TrackLED 25-860	02254011381	4000K	110°	24,5 W	4175 lm	860x70x50 mm
TrackLED 25-860	02255011381	5000K	110°	24,5 W	4175 lm	860x70x50 mm
TrackLED 25-860	02253011382	3000K	110°	24,5 W	3919 lm	860x70x50 mm
TrackLED 25-860	02254011382	4000K	110°	24,5 W	4175 lm	860x70x50 mm
TrackLED 25-860	02255011382	5000K	110°	24,5 W	4175 lm	860x70x50 mm
TrackLED 30-860	02303011380	3000K	110°	29,5 W	4660 lm	860x70x50 mm
TrackLED 30-860	02304011380	4000K	110°	29,5 W	4973 lm	860x70x50 mm
TrackLED 30-860	02305011380	5000K	110°	29,5 W	4973 lm	860x70x50 mm
TrackLED 30-860	02303011381	3000K	110°	29,5 W	4660 lm	860x70x50 mm
TrackLED 30-860	02304011381	4000K	110°	29,5 W	4973 lm	860x70x50 mm
TrackLED 30-860	02305011381	5000K	110°	29,5 W	4973 lm	860x70x50 mm
TrackLED 30-860	02303011382	3000K	110°	29,5 W	4660 lm	860x70x50 mm
TrackLED 30-860	02304011382	4000K	110°	29,5 W	4973 lm	860x70x50 mm

TrackLED 30-860	02305011382	5000K	110°	29,5 W	4973 lm	860x70x50 mm
TrackLED 35-860	02353011380	3000K	110°	34,7 W	5394 lm	860x70x50 mm
TrackLED 35-860	02354011380	4000K	110°	34,7 W	5736 lm	860x70x50 mm
TrackLED 35-860	02355011380	5000K	110°	34,7 W	5736 lm	860x70x50 mm
TrackLED 35-860	02353011381	3000K	110°	34,7 W	5394 lm	860x70x50 mm
TrackLED 35-860	02354011381	4000K	110°	34,7 W	5736 lm	860x70x50 mm
TrackLED 35-860	02355011381	5000K	110°	34,7 W	5736 lm	860x70x50 mm
TrackLED 35-860	02353011382	3000K	110°	34,7 W	5394 lm	860x70x50 mm
TrackLED 35-860	02354011382	4000K	110°	34,7 W	5736 lm	860x70x50 mm
TrackLED 35-860	02355011382	5000K	110°	34,7 W	5736 lm	860x70x50 mm
TrackLED 15-1150	02153011280	3000K	110°	15,1 W	2607 lm	1150x70x50 mm
TrackLED 15-1150	02154011280	4000K	110°	15,1 W	2778 lm	1150x70x50 mm
TrackLED 15-1150	02155011280	5000K	110°	15,1 W	2778 lm	1150x70x50 mm
TrackLED 15-1150	02153011281	3000K	110°	15,1 W	2607 lm	1150x70x50 mm
TrackLED 15-1150	02154011281	4000K	110°	15,1 W	2778 lm	1150x70x50 mm
TrackLED 15-1150	02155011281	5000K	110°	15,1 W	2778 lm	1150x70x50 mm
TrackLED 15-1150	02153011282	3000K	110°	15,1 W	2607 lm	1150x70x50 mm
TrackLED 15-1150	02154011282	4000K	110°	15,1 W	2778 lm	1150x70x50 mm
TrackLED 15-1150	02155011282	5000K	110°	15,1 W	2778 lm	1150x70x50 mm
TrackLED 23-1150	02233011280	3000K	110°	22,5 W	3724 lm	1150x70x50 mm
TrackLED 23-1150	02234011280	4000K	110°	22,5 W	3962 lm	1150x70x50 mm
TrackLED 23-1150	02355011280	5000K	110°	22,5 W	3962 lm	1150x70x50 mm
TrackLED 23-1150	02233011281	3000K	110°	22,5 W	3724 lm	1150x70x50 mm
TrackLED 23-1150	02354011281	4000K	110°	22,5 W	3962 lm	1150x70x50 mm
TrackLED 23-1150	02235011281	5000K	110°	22,5 W	3962 lm	1150x70x50 mm
TrackLED 23-1150	02233011282	3000K	110°	22,5 W	3724 lm	1150x70x50 mm
TrackLED 23-1150	02234011282	4000K	110°	22,5 W	3962 lm	1150x70x50 mm
TrackLED 23-1150	02235011282	5000K	110°	22,5 W	3962 lm	1150x70x50 mm
TrackLED 26-1150	02263011280	3000K	110°	25,6 W	4228 lm	1150x70x50 mm
TrackLED 26-1150	02264011280	4000K	110°	25,6 W	4503 lm	1150x70x50 mm
TrackLED 26-1150	02265011280	5000K	110°	25,6 W	4503 lm	1150x70x50 mm
TrackLED 26-1150	02263011281	3000K	110°	25,6 W	4228 lm	1150x70x50 mm
TrackLED 26-1150	02264011281	4000K	110°	25,6 W	4503 lm	1150x70x50 mm
TrackLED 26-1150	02265011281	5000K	110°	25,6 W	4503 lm	1150x70x50 mm
TrackLED 26-1150	02263011282	3000K	110°	25,6 W	4228 lm	1150x70x50 mm
TrackLED 26-1150	02264011282	4000K	110°	25,6 W	4503 lm	1150x70x50 mm
TrackLED 26-1150	02265011282	5000K	110°	25,6 W	4503 lm	1150x70x50 mm
TrackLED 33-1150	02333011280	3000K	110°	32,3 W	5225 lm	1150x70x50 mm
TrackLED 33-1150	02334011280	4000K	110°	32,3 W	5567 lm	1150x70x50 mm
TrackLED 33-1150	02335011280	5000K	110°	32,3 W	5567 lm	1150x70x50 mm
TrackLED 33-1150	02333011281	3000K	110°	32,3 W	5225 lm	1150x70x50 mm
TrackLED 33-1150	02334011281	4000K	110°	32,3 W	5567 lm	1150x70x50 mm
TrackLED 33-1150	02335011281	5000K	110°	32,3 W	5567 lm	1150x70x50 mm
TrackLED 33-1150	02333011282	3000K	110°	32,3 W	5225 lm	1150x70x50 mm
TrackLED 33-1150	02334011282	4000K	110°	32,3 W	5567 lm	1150x70x50 mm
TrackLED 33-1150	02335011282	5000K	110°	32,3 W	5567 lm	1150x70x50 mm

[illegible]

TrackLED 41-1440	02414011180	4000K	110°	40,2 W	6959 lm	1440x70x50 mm
TrackLED 41-1440	02415011180	5000K	110°	40,2 W	6959 lm	1440x70x50 mm
TrackLED 41-1440	02413011181	3000K	110°	40,2 W	6531 lm	1440x70x50 mm
TrackLED 41-1440	02414011181	4000K	110°	40,2 W	6959 lm	1440x70x50 mm
TrackLED 41-1440	02415011181	5000K	110°	40,2 W	6959 lm	1440x70x50 mm
TrackLED 41-1440	02413011182	3000K	110°	40,2 W	6531 lm	1440x70x50 mm
TrackLED 41-1440	02414011182	4000K	110°	40,2 W	6959 lm	1440x70x50 mm
TrackLED 41-1440	02415011182	5000K	110°	40,2 W	6959 lm	1440x70x50 mm
TrackLED 49-1440	02493011180	3000K	110°	48,7 W	7766 lm	1440x70x50 mm
TrackLED 49-1440	02494011180	4000K	110°	48,7 W	8289 lm	1440x70x50 mm
TrackLED 49-1440	02495011180	5000K	110°	48,7 W	8289 lm	1440x70x50 mm
TrackLED 49-1440	02493011181	3000K	110°	48,7 W	7766 lm	1440x70x50 mm
TrackLED 49-1440	02494011181	4000K	110°	48,7 W	8289 lm	1440x70x50 mm
TrackLED 49-1440	02495011181	5000K	110°	48,7 W	8289 lm	1440x70x50 mm
TrackLED 49-1440	02493011182	3000K	110°	48,7 W	7766 lm	1440x70x50 mm
TrackLED 49-1440	02494011182	4000K	110°	48,7 W	8289 lm	1440x70x50 mm
TrackLED 49-1440	02495011182	5000K	110°	48,7 W	8289 lm	1440x70x50 mm
TrackLED 58-1440	02583011180	3000K	110°	57,2 W	8989 lm	1440x70x50 mm
TrackLED 58-1440	02584011180	4000K	110°	57,2 W	9559 lm	1440x70x50 mm
TrackLED 58-1440	02585011180	5000K	110°	57,2 W	9559 lm	1440x70x50 mm
TrackLED 58-1440	02583011181	3000K	110°	57,2 W	8989 lm	1440x70x50 mm
TrackLED 58-1440	02584011181	4000K	110°	57,2 W	9559 lm	1440x70x50 mm
TrackLED 58-1440	02585011181	5000K	110°	57,2 W	9559 lm	1440x70x50 mm
TrackLED 58-1440	02583011182	3000K	110°	57,2 W	8989 lm	1440x70x50 mm
TrackLED 58-1440	02584011182	4000K	110°	57,2 W	9559 lm	1440x70x50 mm
TrackLED 58-1440	02585011182	5000K	110°	57,2 W	9559 lm	1440x70x50 mm

StoreLED

LED - area luminaire for homogeneous illumination of areas and corridors

Can be used in 3- phase track by different manufacturers

asymmetric outside optic,

energy efficiency class A

system luminous flux up to 185 lumens per watt

absolutely homogeneous illumination / light colours 3.000 K, 4.000 K &
5.000 K

tight colour tolerance MacAdam 3 / very good colour rendering CRI type.
85

5-years system guarantee / service life <60.000 hours

ENEC certified


2 high-quality trunking adapter for optimum hold and alignment

Protection category IP20 / protection class I

On/Off or dimmable & building management

colour white, black, silver

special designs on customer request

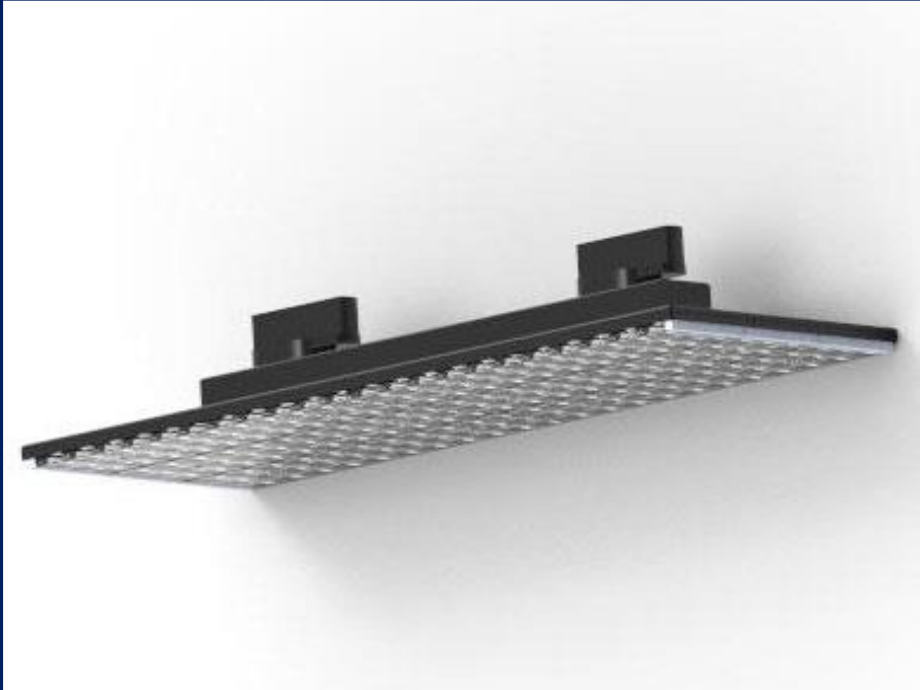

StoreLED



StoreLED ,3-row LEDs, 3-phase track, dimmable and non-dimmable, different light colors available, other light colours on request, different wattages, different colours, protection class IP 20, ENEC certified

Bezeichnung	Artikelnummer	Lichtfarbe	Optik	Systemleistung	Lichtstrom System	Farbe	Abmessungen
StoreLED 3x3R 20-30-110	09203011000	3000 K	110°	19,2 W	3278 lm	schwarz	590x192x80mm
StoreLED 3x3R 20-30-110	09203011001	3000 K	110°	19,2 W	3278 lm	weiß	590x192x80mm
StoreLED 3x3R 20-30-110	09203011002	3000 K	110°	19,2 W	3278 lm	silber	590x192x80mm
StoreLED 3x3R 20-35-110	09203511000	3500 K	110°	19,2 W	3426 lm	schwarz	590x192x80mm
StoreLED 3x3R 20-35-110	09203511001	3500 K	110°	19,2 W	3426 lm	weiß	590x192x80mm
StoreLED 3x3R 20-35-110	09203511002	3500 K	110°	19,2 W	3426 lm	silber	590x192x80mm
StoreLED 3x3R 20-40-110	09204011000	4000 K	110°	19,2 W	3488 lm	schwarz	590x192x80mm
StoreLED 3x3R 20-40-110	09204011001	4000 K	110°	19,2 W	3488 lm	weiß	590x192x80mm
StoreLED 3x3R 20-40-110	09204011002	4000 K	110°	19,2 W	3488 lm	silber	590x192x80mm

StoreLED 3x3R 20-50-110	09205011000	5000 K	110°	19,2 W	3488 lm	schwarz	590x192x80mm
StoreLED 3x3R 20-50-110	09205011001	5000 K	110°	19,2 W	3488 lm	weiß	590x192x80mm
StoreLED 3x3R 20-50-110	09205011002	5000 K	110°	19,2 W	3488 lm	silber	590x192x80mm
StoreLED 3x3R 21-30-110 DALI	09213011000	3000 K	110°	19,4 W	3278 lm	schwarz	590x192x80mm
StoreLED 3x3R 21-30-110 DALI	09213011001	3000 K	110°	19,4 W	3278 lm	weiß	590x192x80mm
StoreLED 3x3R 21-30-110 DALI	09213011002	3000 K	110°	19,4 W	3278 lm	silber	590x192x80mm
StoreLED 3x3R 21-35-110 DALI	09213511000	3500 K	110°	19,4 W	3426 lm	schwarz	590x192x80mm
StoreLED 3x3R 21-35-110 DALI	09213511001	3500 K	110°	19,4 W	3426 lm	weiß	590x192x80mm
StoreLED 3x3R 21-35-110 DALI	09213511002	3500 K	110°	19,4 W	3426 lm	silber	590x192x80mm
StoreLED 3x3R 21-40-110 DALI	09214011000	4000 K	110°	19,4 W	3488 lm	schwarz	590x192x80mm
StoreLED 3x3R 21-40-110 DALI	09214011001	4000 K	110°	19,4 W	3488 lm	weiß	590x192x80mm
StoreLED 3x3R 21-40-110 DALI	09214011002	4000 K	110°	19,4 W	3488 lm	silber	590x192x80mm
StoreLED 3x3R 21-50-110 DALI	09215011000	5000 K	110°	19,4 W	3488 lm	schwarz	590x192x80mm
StoreLED 3x3R 21-50-110 DALI	09215011001	5000 K	110°	19,4 W	3488 lm	weiß	590x192x80mm
StoreLED 3x3R 21-50-110 DALI	09215011002	5000 K	110°	19,4 W	3488 lm	silber	590x192x80mm
StoreLED 3x3R 24-30-110	09243011000	3000 K	110°	22,6 W	3910 lm	schwarz	590x192x80mm
StoreLED 3x3R 24-30-110	09243011001	3000 K	110°	22,6 W	3910 lm	weiß	590x192x80mm
StoreLED 3x3R 24-30-110	09243011002	3000 K	110°	22,6 W	3910 lm	silber	590x192x80mm
StoreLED 3x3R 24-35-110	09243511000	3500 K	110°	22,6 W	4092 lm	schwarz	590x192x80mm
StoreLED 3x3R 24-35-110	09243511001	3500 K	110°	22,6 W	4092 lm	weiß	590x192x80mm
StoreLED 3x3R 24-35-110	09243511002	3500 K	110°	22,6 W	4092 lm	silber	590x192x80mm
StoreLED 3x3R 24-40-110	09244011000	4000 K	110°	22,6 W	4167 lm	schwarz	590x192x80mm
StoreLED 3x3R 24-40-110	09244011001	4000 K	110°	22,6 W	4167 lm	weiß	590x192x80mm
StoreLED 3x3R 24-50-110	09245011000	5000 K	110°	22,6 W	4167 lm	schwarz	590x192x80mm
StoreLED 3x3R 24-50-110	09245011001	5000 K	110°	22,6 W	4167 lm	weiß	590x192x80mm
StoreLED 3x3R 24-50-110	09245011002	5000 K	110°	22,6 W	4167 lm	silber	590x192x80mm
StoreLED 3x3R 25-30-110 DALI	09253011000	3000 K	110°	22,9 W	3910 lm	schwarz	590x192x80mm
StoreLED 3x3R 25-30-110 DALI	09253011001	3000 K	110°	22,9 W	3910 lm	weiß	590x192x80mm
StoreLED 3x3R 25-30-110 DALI	09253011002	3000 K	110°	22,9 W	3910 lm	silber	590x192x80mm
StoreLED 3x3R 25-35-110 DALI	09253511000	3500 K	110°	22,9 W	4092 lm	schwarz	590x192x80mm
StoreLED 3x3R 25-35-110 DALI	09253511001	3500 K	110°	22,9 W	4092 lm	weiß	590x192x80mm
StoreLED 3x3R 25-35-110 DALI	09253511002	3500 K	110°	22,9 W	4092 lm	silber	590x192x80mm
StoreLED 3x3R 25-40-110 DALI	09254011000	4000 K	110°	22,9 W	4167 lm	schwarz	590x192x80mm
StoreLED 3x3R 25-40-110 DALI	09254011001	4000 K	110°	22,9 W	4167 lm	weiß	590x192x80mm
StoreLED 3x3R 25-40-110 DALI	09254011002	4000 K	110°	22,9 W	#BEZUG!	silber	590x192x80mm
StoreLED 3x3R 25-50-110 DALI	09255011000	5000 K	110°	22,9 W	4167 lm	schwarz	590x192x80mm
StoreLED 3x3R 25-50-110 DALI	09255011001	5000 K	110°	22,9 W	4167 lm	weiß	590x192x80mm
StoreLED 3x3R 25-50-110 DALI	09255011002	5000 K	110°	22,9 W	4167 lm	silber	590x192x80mm
StoreLED 3x3R 34-30-110	09343011000	3000 K	110°	33,5 W	5586 lm	schwarz	590x192x80mm
StoreLED 3x3R 34-30-110	09343011001	3000 K	110°	33,5 W	5586 lm	weiß	590x192x80mm
StoreLED 3x3R 34-30-110	09343011002	3000 K	110°	33,5 W	5586 lm	silber	590x192x80mm
StoreLED 3x3R 34-35-110	09343511000	3500 K	110°	33,5 W	5835 lm	schwarz	590x192x80mm
StoreLED 3x3R 34-35-110	09343511001	3500 K	110°	33,5 W	5835 lm	weiß	590x192x80mm
StoreLED 3x3R 34-35-110	09343511002	3500 K	110°	33,5 W	5835 lm	silber	590x192x80mm
StoreLED 3x3R 34-40-110	09344011000	4000 K	110°	33,5 W	5942 lm	schwarz	590x192x80mm
StoreLED 3x3R 34-40-110	09344011001	4000 K	110°	33,5 W	5942 lm	weiß	590x192x80mm

StoreLED 3x3R 34-40-110	09344011002	4000 K	110°	33,5 W	5942 lm	silber	590x192x80mm
StoreLED 3x3R 34-50-110	09345011000	5000 K	110°	33,5 W	5942 lm	schwarz	590x192x80mm
StoreLED 3x3R 34-50-110	09345011001	5000 K	110°	33,5 W	5942 lm	weiß	590x192x80mm
StoreLED 3x3R 34-50-110	09345011002	5000 K	110°	33,5 W	5942 lm	silber	590x192x80mm
StoreLED 3x3R 35-30-110 DALI	09353011000	3000 K	110°	33,7 W	5586 lm	schwarz	590x192x80mm
StoreLED 3x3R 35-30-110 DALI	09353011001	3000 K	110°	33,7 W	5586 lm	weiß	590x192x80mm
StoreLED 3x3R 35-30-110 DALI	09353011002	3000 K	110°	33,7 W	5586 lm	silber	590x192x80mm
StoreLED 3x3R 35-35-110 DALI	09353511000	3500 K	110°	33,7 W	5835 lm	schwarz	590x192x80mm
StoreLED 3x3R 35-35-110 DALI	09353511001	3500 K	110°	33,7 W	5835 lm	weiß	590x192x80mm
StoreLED 3x3R 35-35-110 DALI	09353511002	3500 K	110°	33,7 W	5835 lm	silber	590x192x80mm
StoreLED 3x3R 35-40-110 DALI	09354011000	4000 K	110°	33,7 W	5942 lm	schwarz	590x192x80mm
StoreLED 3x3R 35-40-110 DALI	09354011001	4000 K	110°	33,7 W	5942 lm	weiß	590x192x80mm
StoreLED 3x3R 35-40-110 DALI	09354011002	4000 K	110°	33,7 W	5942 lm	silber	590x192x80mm
StoreLED 3x3R 35-50-110 DALI	09355011000	5000 K	110°	33,7 W	5942 lm	schwarz	590x192x80mm
StoreLED 3x3R 35-50-110 DALI	09355011001	5000 K	110°	33,7 W	5942 lm	weiß	590x192x80mm
StoreLED 3x3R 35-50-110 DALI	09355011002	5000 K	110°	33,7 W	5942 lm	silber	590x192x80mm
StoreLED 3x3R 39-30-110	09393011000	3000 K	110°	38,2 W	6341 lm	schwarz	590x192x80mm
StoreLED 3x3R 39-30-110	09393011001	3000 K	110°	38,2 W	6341 lm	weiß	590x192x80mm
StoreLED 3x3R 39-30-110	09393011002	3000 K	110°	38,2 W	6341 lm	silber	590x192x80mm
StoreLED 3x3R 39-35-110	09393511000	3500 K	110°	38,2 W	6633 lm	schwarz	590x192x80mm
StoreLED 3x3R 39-35-110	09393511001	3500 K	110°	38,2 W	6633 lm	weiß	590x192x80mm
StoreLED 3x3R 39-35-110	09393511002	3500 K	110°	38,2 W	6633 lm	silber	590x192x80mm
StoreLED 3x3R 39-40-110	09394011000	4000 K	110°	38,2 W	6755 lm	schwarz	590x192x80mm
StoreLED 3x3R 39-40-110	09394011001	4000 K	110°	38,2 W	6755 lm	weiß	590x192x80mm
StoreLED 3x3R 39-40-110	09394011002	4000 K	110°	38,2 W	6755 lm	silber	590x192x80mm
StoreLED 3x3R 39-50-110	09395011000	5000 K	110°	38,2 W	6755 lm	schwarz	590x192x80mm
StoreLED 3x3R 39-50-110	09395011001	5000 K	110°	38,2 W	6755 lm	weiß	590x192x80mm
StoreLED 3x3R 39-50-110	09395011002	5000 K	110°	38,2 W	6755 lm	silber	590x192x80mm
StoreLED 3x3R 40-30-110 DALI	09403011000	3000 K	110°	39,2 W	6341 lm	schwarz	590x192x80mm
StoreLED 3x3R 40-30-110 DALI	09403011001	3000 K	110°	39,2 W	6341 lm	weiß	590x192x80mm
StoreLED 3x3R 40-30-110 DALI	09403011002	3000 K	110°	39,2 W	6341 lm	silber	590x192x80mm
StoreLED 3x3R 40-35-110 DALI	09403511000	3500 K	110°	39,2 W	6633 lm	schwarz	590x192x80mm
StoreLED 3x3R 40-35-110 DALI	09403511001	3500 K	110°	39,2 W	6633 lm	weiß	590x192x80mm
StoreLED 3x3R 40-35-110 DALI	09403511002	3500 K	110°	39,2 W	6633 lm	silber	590x192x80mm
StoreLED 3x3R 40-40-110 DALI	09404011000	4000 K	110°	39,2 W	6755 lm	schwarz	590x192x80mm
StoreLED 3x3R 40-40-110 DALI	09404011001	4000 K	110°	39,2 W	6755 lm	weiß	590x192x80mm
StoreLED 3x3R 40-40-110 DALI	09404011002	4000 K	110°	39,2 W	6755 lm	silber	590x192x80mm
StoreLED 3x3R 40-50-110 DALI	09405011000	5000 K	110°	39,2 W	6755 lm	schwarz	590x192x80mm
StoreLED 3x3R 40-50-110 DALI	09405011001	5000 K	110°	39,2 W	6755 lm	weiß	590x192x80mm
StoreLED 3x3R 40-50-110 DALI	09405011002	5000 K	110°	39,2 W	6755 lm	silber	590x192x80mm
StoreLED 3x3R 49-30-110	09493011000	3000 K	110°	48,2 W	7838 lm	schwarz	590x192x80mm
StoreLED 3x3R 49-30-110	09493011001	3000 K	110°	48,2 W	7838 lm	weiß	590x192x80mm
StoreLED 3x3R 49-30-110	09493011002	3000 K	110°	48,2 W	7838 lm	silber	590x192x80mm
StoreLED 3x3R 49-35-110	09493511000	3500 K	110°	48,2 W	8200 lm	schwarz	590x192x80mm
StoreLED 3x3R 49-35-110	09493511001	3500 K	110°	48,2 W	8200 lm	weiß	590x192x80mm
StoreLED 3x3R 49-35-110	09493511002	3500 K	110°	48,2 W	8200 lm	silber	590x192x80mm

StoreLED 3x3R 49-40-110	09494011000	4000 K	110°	48,2 W	8351 lm	schwarz	590x192x80mm
StoreLED 3x3R 49-40-110	09494011001	4000 K	110°	48,2 W	8351 lm	weiß	590x192x80mm
StoreLED 3x3R 49-40-110	09494011002	4000 K	110°	48,2 W	8351 lm	silber	590x192x80mm
StoreLED 3x3R 49-50-110	09495011000	5000 K	110°	48,2 W	8351 lm	schwarz	590x192x80mm
StoreLED 3x3R 49-50-110	09495011001	5000 K	110°	48,2 W	8351 lm	weiß	590x192x80mm
StoreLED 3x3R 49-50-110	09495011002	5000 K	110°	48,2 W	8351 lm	silber	590x192x80mm
StoreLED 3x3R 50-30-110 DALI	09503011000	3000 K	110°	49,5 W	7838 lm	schwarz	590x192x80mm
StoreLED 3x3R 50-30-110 DALI	09503011001	3000 K	110°	49,5 W	7838 lm	weiß	590x192x80mm
StoreLED 3x3R 50-30-110 DALI	09503011002	3000 K	110°	49,5 W	7838 lm	silber	590x192x80mm
StoreLED 3x3R 50-35-110 DALI	09503511000	3500 K	110°	49,5 W	8200 lm	schwarz	590x192x80mm
StoreLED 3x3R 50-35-110 DALI	09503511001	3500 K	110°	49,5 W	8200 lm	weiß	590x192x80mm
StoreLED 3x3R 50-35-110 DALI	09503511002	3500 K	110°	49,5 W	8200 lm	silber	590x192x80mm
StoreLED 3x3R 50-40-110 DALI	09504011000	4000 K	110°	49,5 W	8351 lm	schwarz	590x192x80mm
StoreLED 3x3R 50-40-110 DALI	09504011001	4000 K	110°	49,5 W	8351 lm	weiß	590x192x80mm
StoreLED 3x3R 50-40-110 DALI	09504011002	4000 K	110°	49,5 W	8351 lm	silber	590x192x80mm
StoreLED 3x3R 50-50-110 DALI	09505011000	5000 K	110°	49,5 W	8351 lm	schwarz	590x192x80mm
StoreLED 3x3R 50-50-110 DALI	09505011001	5000 K	110°	49,5 W	8351 lm	weiß	590x192x80mm
StoreLED 3x3R 50-50-110 DALI	09505011002	5000 K	110°	49,5 W	8351 lm	silber	590x192x80mm
StoreLED 3x3R 69-30-110	09693011000	3000 K	110°	68,9 W	10787 lm	schwarz	590x192x80mm
StoreLED 3x3R 69-30-110	09693011001	3000 K	110°	68,9 W	10787 lm	weiß	590x192x80mm
StoreLED 3x3R 69-30-110	09693011002	3000 K	110°	68,9 W	10787 lm	silber	590x192x80mm
StoreLED 3x3R 69-35-110	09693511000	3500 K	110°	68,9 W	11265 lm	schwarz	590x192x80mm
StoreLED 3x3R 69-35-110	09693511001	3500 K	110°	68,9 W	11265 lm	weiß	590x192x80mm
StoreLED 3x3R 69-35-110	09693511002	3500 K	110°	68,9 W	11265 lm	silber	590x192x80mm
StoreLED 3x3R 69-40-110	09694011000	4000 K	110°	68,9 W	11471 lm	schwarz	590x192x80mm
StoreLED 3x3R 69-40-110	09694011001	4000 K	110°	68,9 W	11471 lm	weiß	590x192x80mm
StoreLED 3x3R 69-40-110	09694011002	4000 K	110°	68,9 W	11471 lm	silber	590x192x80mm
StoreLED 3x3R 69-50-110	09695011000	5000 K	110°	68,9 W	11471 lm	schwarz	590x192x80mm
StoreLED 3x3R 69-50-110	09695011001	5000 K	110°	68,9 W	11471 lm	weiß	590x192x80mm
StoreLED 3x3R 69-50-110	09695011002	5000 K	110°	68,9 W	11471 lm	silber	590x192x80mm
StoreLED 3x3R 70-30-110 DALI	09703011000	3000 K	110°	70,0 W	10787 lm	schwarz	590x192x80mm
StoreLED 3x3R 70-30-110 DALI	09703011001	3000 K	110°	70,0 W	10787 lm	weiß	590x192x80mm
StoreLED 3x3R 70-30-110 DALI	09703011002	3000 K	110°	70,0 W	10787 lm	silber	590x192x80mm
StoreLED 3x3R 70-35-110 DALI	09703511000	3500 K	110°	70,0 W	11265 lm	schwarz	590x192x80mm
StoreLED 3x3R 70-35-110 DALI	09703511001	3500 K	110°	70,0 W	11265 lm	weiß	590x192x80mm
StoreLED 3x3R 70-35-110 DALI	09703511002	3500 K	110°	70,0 W	11265 lm	silber	590x192x80mm
StoreLED 3x3R 70-40-110 DALI	09704011000	4000 K	110°	70,0 W	11471 lm	schwarz	590x192x80mm
StoreLED 3x3R 70-40-110 DALI	09704011001	4000 K	110°	70,0 W	11471 lm	weiß	590x192x80mm
StoreLED 3x3R 70-40-110 DALI	09704011002	4000 K	110°	70,0 W	11471 lm	silber	590x192x80mm
StoreLED 3x3R 70-50-110 DALI	09705011000	5000 K	110°	70,0 W	11471 lm	schwarz	590x192x80mm
StoreLED 3x3R 70-50-110 DALI	09705011001	5000 K	110°	70,0 W	11471 lm	weiß	590x192x80mm
StoreLED 3x3R 70-50-110 DALI	09705011002	5000 K	110°	70,0 W	11471 lm	silber	590x192x80mm

StoreLED S



StoreLED ,3-row LEDs, 3-phase track, , different light colors available, other light colours on request, different wattages, different colours, protection class IP 20, ENEC certified

Bezeichnung	Artikelnummer	Lichtfarbe	Optik	Systemleistung	Lichtstromsystem	Farbe	Abmessungen
StoreLED S 3x3R 20-30-030	09203003005	3000 K	30°	19,2 W	3278 lm	schwarz	590x192x80mm
StoreLED S 3x3R 20-30-030	09203003006	3000 K	30°	19,2 W	3278 lm	weiß	590x192x80mm
StoreLED S 3x3R 20-30-030	09203003007	3000 K	30°	19,2 W	3278 lm	silber	590x192x80mm
StoreLED S 3x3R 20-35-030	09203503005	3500 K	30°	19,2 W	3426 lm	schwarz	590x192x80mm
StoreLED S 3x3R 20-35-030	09203503006	3500 K	30°	19,2 W	3426 lm	weiß	590x192x80mm
StoreLED S 3x3R 20-35-030	09203503007	3500 K	30°	19,2 W	3426 lm	silber	590x192x80mm
StoreLED S 3x3R 20-40-030	09204003005	4000 K	30°	19,2 W	3488 lm	schwarz	590x192x80mm
StoreLED S 3x3R 20-40-030	09204003006	4000 K	30°	19,2 W	3488 lm	weiß	590x192x80mm
StoreLED S 3x3R 20-40-030	09204003007	4000 K	30°	19,2 W	3488 lm	silber	590x192x80mm
StoreLED S 3x3R 20-50-030	09205003005	5000 K	30°	19,2 W	3488 lm	schwarz	590x192x80mm
StoreLED S 3x3R 20-50-030	09205003006	5000 K	30°	19,2 W	3488 lm	weiß	590x192x80mm
StoreLED S 3x3R 20-50-030	09205003007	5000 K	30°	19,2 W	3488 lm	silber	590x192x80mm
StoreLED S 3x3R 24-30-030	09243003005	3000 K	30°	22,6 W	3910 lm	schwarz	590x192x80mm
StoreLED S 3x3R 24-30-030	09243003006	3000 K	30°	22,6 W	3910 lm	weiß	590x192x80mm
StoreLED S 3x3R 24-30-030	09243003007	3000 K	30°	22,6 W	3910 lm	silber	590x192x80mm
StoreLED S 3x3R 24-35-030	09243503005	3500 K	30°	22,6 W	4092 lm	schwarz	590x192x80mm
StoreLED S 3x3R 24-35-030	09243503006	3500 K	30°	22,6 W	4092 lm	weiß	590x192x80mm
StoreLED S 3x3R 24-35-030	09243503007	3500 K	30°	22,6 W	4092 lm	silber	590x192x80mm
StoreLED S 3x3R 24-40-030	09244003005	4000 K	30°	22,6 W	4167 lm	schwarz	590x192x80mm
StoreLED S 3x3R 24-40-030	09244003006	4000 K	30°	22,6 W	4167 lm	weiß	590x192x80mm
StoreLED S 3x3R 24-40-030	09244003007	4000 K	30°	22,6 W	4167 lm	silber	590x192x80mm
StoreLED S 3x3R 24-50-030	09245003005	5000 K	30°	22,6 W	4167 lm	schwarz	590x192x80mm
StoreLED S 3x3R 24-50-030	09245003006	5000 K	30°	22,6 W	4167 lm	weiß	590x192x80mm
StoreLED S 3x3R 24-50-030	09245003007	5000 K	30°	22,6 W	4167 lm	silber	590x192x80mm
StoreLED S 3x3R 34-30-030	09343003005	3000 K	30°	33,5 W	5586 lm	schwarz	590x192x80mm
StoreLED S 3x3R 34-30-030	09343003006	3000 K	30°	33,5 W	5586 lm	weiß	590x192x80mm
StoreLED S 3x3R 34-30-030	09343003007	3000 K	30°	33,5 W	5586 lm	silber	590x192x80mm
StoreLED S 3x3R 34-35-030	09343503005	3500 K	30°	33,5 W	5835 lm	schwarz	590x192x80mm
StoreLED S 3x3R 34-35-030	09343503006	3500 K	30°	33,5 W	5835 lm	weiß	590x192x80mm
StoreLED S 3x3R 34-35-030	09343503007	3500 K	30°	33,5 W	5835 lm	silber	590x192x80mm
StoreLED S 3x3R 34-40-030	09344003005	4000 K	30°	33,5 W	5942 lm	schwarz	590x192x80mm
StoreLED S 3x3R 34-40-030	09344003006	4000 K	30°	33,5 W	5942 lm	weiß	590x192x80mm
StoreLED S 3x3R 34-40-030	09344003007	4000 K	30°	33,5 W	5942 lm	silber	590x192x80mm
StoreLED S 3x3R 34-50-030	09345003005	5000 K	30°	33,5 W	5942 lm	schwarz	590x192x80mm
StoreLED S 3x3R 34-50-030	09345003006	5000 K	30°	33,5 W	5942 lm	weiß	590x192x80mm
StoreLED S 3x3R 34-50-030	09345003007	5000 K	30°	33,5 W	5942 lm	silber	590x192x80mm
StoreLED S 3x3R 39-30-030	09393003005	3000 K	30°	38,2 W	6341 lm	schwarz	590x192x80mm
StoreLED S 3x3R 39-30-030	09393003006	3000 K	30°	38,2 W	6341 lm	weiß	590x192x80mm
StoreLED S 3x3R 39-30-030	09393003007	3000 K	30°	38,2 W	6341 lm	silber	590x192x80mm
StoreLED S 3x3R 39-35-030	09393503005	3500 K	30°	38,2 W	6633 lm	schwarz	590x192x80mm
StoreLED S 3x3R 39-35-030	09393503006	3500 K	30°	38,2 W	6633 lm	weiß	590x192x80mm
StoreLED S 3x3R 39-35-030	09393503007	3500 K	30°	38,2 W	6633 lm	silber	590x192x80mm

StoreLED S 3x3R 39-40-030	09394003005	4000 K	30°	38,2 W	6755 lm	schwarz	590x192x80mm
StoreLED S 3x3R 39-40-030	09394003006	4000 K	30°	38,2 W	6755 lm	weiß	590x192x80mm
StoreLED S 3x3R 39-40-030	09394003007	4000 K	30°	38,2 W	6755 lm	silber	590x192x80mm
StoreLED S 3x3R 39-50-030	09395003005	5000 K	30°	38,2 W	6755 lm	schwarz	590x192x80mm
StoreLED S 3x3R 39-50-030	09395003006	5000 K	30°	38,2 W	6755 lm	weiß	590x192x80mm
StoreLED S 3x3R 39-50-030	09395003007	5000 K	30°	38,2 W	6755 lm	silber	590x192x80mm
StoreLED S3x3R 49-30-030	09493003005	3000 K	30°	48,2 W	7838 lm	schwarz	590x192x80mm
StoreLED S3x3R 49-30-030	09493003006	3000 K	30°	48,2 W	7838 lm	weiß	590x192x80mm
StoreLED S3x3R 49-30-030	09493003007	3000 K	30°	48,2 W	7838 lm	silber	590x192x80mm
StoreLED S 3x3R 49-35-030	09493503005	3500 K	30°	48,2 W	8200 lm	schwarz	590x192x80mm
StoreLED S 3x3R 49-35-030	09493503006	3500 K	30°	48,2 W	8200 lm	weiß	590x192x80mm
StoreLED S 3x3R 49-35-030	09493503007	3500 K	30°	48,2 W	8200 lm	silber	590x192x80mm
StoreLED S 3x3R 49-40-030	09494003005	4000 K	30°	48,2 W	8351 lm	schwarz	590x192x80mm
StoreLED S 3x3R 49-40-030	09494003006	4000 K	30°	48,2 W	8351 lm	weiß	590x192x80mm
StoreLED S 3x3R 49-40-030	09494003007	4000 K	30°	48,2 W	8351 lm	silber	590x192x80mm
StoreLED S 3x3R 49-50-030	09495003005	5000 K	30°	48,2 W	8351 lm	schwarz	590x192x80mm
StoreLED S 3x3R 49-50-030	09495003006	5000 K	30°	48,2 W	8351 lm	weiß	590x192x80mm
StoreLED S 3x3R 49-50-030	09495003007	5000 K	30°	48,2 W	8351 lm	silber	590x192x80mm
StoreLED S 3x3R 69-30-030	09693003005	3000 K	30°	68,9 W	10787 lm	schwarz	590x192x80mm
StoreLED S 3x3R 69-30-030	09693003006	3000 K	30°	68,9 W	10787 lm	weiß	590x192x80mm
StoreLED S 3x3R 69-30-030	09693003007	3000 K	30°	68,9 W	10787 lm	silber	590x192x80mm
StoreLED S 3x3R 69-35-030	09693503005	3500 K	30°	68,9 W	11265 lm	schwarz	590x192x80mm
StoreLED S 3x3R 69-35-030	09693503006	3500 K	30°	68,9 W	11265 lm	weiß	590x192x80mm
StoreLED S 3x3R 69-35-030	09693503007	3500 K	30°	68,9 W	11265 lm	silber	590x192x80mm
StoreLED S 3x3R 69-40-030	09694003005	4000 K	30°	68,9 W	11471 lm	schwarz	590x192x80mm
StoreLED S 3x3R 69-40-030	09694003006	4000 K	30°	68,9 W	11471 lm	weiß	590x192x80mm
StoreLED S 3x3R 69-40-030	09694003007	4000 K	30°	68,9 W	11471 lm	silber	590x192x80mm
StoreLED S 3x3R 69-50-030	09695003005	5000 K	30°	68,9 W	11471 lm	schwarz	590x192x80mm
StoreLED S 3x3R 69-50-030	09695003006	5000 K	30°	68,9 W	11471 lm	weiß	590x192x80mm
StoreLED S 3x3R 69-50-030	09695003007	5000 K	30°	68,9 W	11471 lm	silber	590x192x80mm
StoreLED S 3x3R 20-30-060	09203003005	3000 K	60°	19,2 W	3278 lm	schwarz	590x192x80mm
StoreLED S 3x3R 20-30-060	09203003006	3000 K	60°	19,2 W	3278 lm	weiß	590x192x80mm
StoreLED S 3x3R 20-30-060	09203003007	3000 K	60°	19,2 W	3278 lm	silber	590x192x80mm
StoreLED S 3x3R 20-35-060	09203503005	3500 K	60°	19,2 W	3426 lm	schwarz	590x192x80mm
StoreLED S 3x3R 20-35-060	09203503006	3500 K	60°	19,2 W	3426 lm	weiß	590x192x80mm
StoreLED S 3x3R 20-35-060	09203503007	3500 K	60°	19,2 W	3426 lm	silber	590x192x80mm
StoreLED S 3x3R 20-40-060	09204003005	4000 K	60°	19,2 W	3488 lm	schwarz	590x192x80mm
StoreLED S 3x3R 20-40-060	09204003006	4000 K	60°	19,2 W	3488 lm	weiß	590x192x80mm
StoreLED S 3x3R 20-40-060	09204003007	4000 K	60°	19,2 W	3488 lm	silber	590x192x80mm
StoreLED S 3x3R 20-50-060	09205003005	5000 K	60°	19,2 W	3488 lm	schwarz	590x192x80mm
StoreLED S 3x3R 20-50-060	09205003006	5000 K	60°	19,2 W	3488 lm	weiß	590x192x80mm
StoreLED S 3x3R 20-50-060	09205003007	5000 K	60°	19,2 W	3488 lm	silber	590x192x80mm
StoreLED S 3x3R 24-30-060	09243003005	3000 K	60°	22,6 W	3910 lm	schwarz	590x192x80mm
StoreLED S 3x3R 24-30-060	09243003006	3000 K	60°	22,6 W	3910 lm	weiß	590x192x80mm
StoreLED S 3x3R 24-30-060	09243003007	3000 K	60°	22,6 W	3910 lm	silber	590x192x80mm
StoreLED S 3x3R 24-35-060	09243503005	3500 K	60°	22,6 W	4092 lm	schwarz	590x192x80mm

StoreLED S 3x3R 24-35-060	09243503006	3500 K	60°	22,6 W	4092 lm	weiß	590x192x80mm
StoreLED S 3x3R 24-35-060	09243503007	3500 K	60°	22,6 W	4092 lm	silber	590x192x80mm
StoreLED S 3x3R 24-40-060	09244003005	4000 K	60°	22,6 W	4167 lm	schwarz	590x192x80mm
StoreLED S 3x3R 24-40-060	09244003006	4000 K	60°	22,6 W	4167 lm	weiß	590x192x80mm
StoreLED S 3x3R 24-40-060	09244003007	4000 K	60°	22,6 W	4167 lm	silber	590x192x80mm
StoreLED S 3x3R 24-50-060	09245003005	5000 K	60°	22,6 W	4167 lm	schwarz	590x192x80mm
StoreLED S 3x3R 24-50-060	09245003006	5000 K	60°	22,6 W	4167 lm	weiß	590x192x80mm
StoreLED S 3x3R 24-50-060	09245003007	5000 K	60°	22,6 W	4167 lm	silber	590x192x80mm
StoreLED S 3x3R 34-30-060	09343003005	3000 K	60°	33,5 W	5586 lm	schwarz	590x192x80mm
StoreLED S 3x3R 34-30-060	09343003006	3000 K	60°	33,5 W	5586 lm	weiß	590x192x80mm
StoreLED S 3x3R 34-30-060	09343003007	3000 K	60°	33,5 W	5586 lm	silber	590x192x80mm
StoreLED S 3x3R 34-35-060	09343503005	3500 K	60°	33,5 W	5835 lm	schwarz	590x192x80mm
StoreLED S 3x3R 34-35-060	09343503006	3500 K	60°	33,5 W	5835 lm	weiß	590x192x80mm
StoreLED S 3x3R 34-35-060	09343503007	3500 K	60°	33,5 W	5835 lm	silber	590x192x80mm
StoreLED S 3x3R 34-40-060	09344003005	4000 K	60°	33,5 W	5942 lm	schwarz	590x192x80mm
StoreLED S 3x3R 34-40-060	09344003006	4000 K	60°	33,5 W	5942 lm	weiß	590x192x80mm
StoreLED S 3x3R 34-40-060	09344003007	4000 K	60°	33,5 W	5942 lm	silber	590x192x80mm
StoreLED S 3x3R 34-50-060	09345003005	5000 K	60°	33,5 W	5942 lm	schwarz	590x192x80mm
StoreLED S 3x3R 34-50-060	09345003006	5000 K	60°	33,5 W	5942 lm	weiß	590x192x80mm
StoreLED S 3x3R 34-50-060	09345003007	5000 K	60°	33,5 W	5942 lm	silber	590x192x80mm
StoreLED S 3x3R 39-30-060	09393003005	3000 K	60°	38,2 W	6341 lm	schwarz	590x192x80mm
StoreLED S 3x3R 39-30-060	09393003006	3000 K	60°	38,2 W	6341 lm	weiß	590x192x80mm
StoreLED S 3x3R 39-30-060	09393003007	3000 K	60°	38,2 W	6341 lm	silber	590x192x80mm
StoreLED S 3x3R 39-35-060	09393503005	3500 K	60°	38,2 W	6633 lm	schwarz	590x192x80mm
StoreLED S 3x3R 39-35-060	09393503006	3500 K	60°	38,2 W	6633 lm	weiß	590x192x80mm
StoreLED S 3x3R 39-35-060	09393503007	3500 K	60°	38,2 W	6633 lm	silber	590x192x80mm
StoreLED S 3x3R 39-40-060	09394003005	4000 K	60°	38,2 W	6755 lm	schwarz	590x192x80mm
StoreLED S 3x3R 39-40-060	09394003006	4000 K	60°	38,2 W	6755 lm	weiß	590x192x80mm
StoreLED S 3x3R 39-40-060	09394003007	4000 K	60°	38,2 W	6755 lm	silber	590x192x80mm
StoreLED S 3x3R 39-50-060	09395003005	5000 K	60°	38,2 W	6755 lm	schwarz	590x192x80mm
StoreLED S 3x3R 39-50-060	09395003006	5000 K	60°	38,2 W	6755 lm	weiß	590x192x80mm
StoreLED S 3x3R 39-50-060	09395003007	5000 K	60°	38,2 W	6755 lm	silber	590x192x80mm
StoreLED S3x3R 49-30-060	09493003005	3000 K	60°	48,2 W	7838 lm	schwarz	590x192x80mm
StoreLED S3x3R 49-30-060	09493003006	3000 K	60°	48,2 W	7838 lm	weiß	590x192x80mm
StoreLED S3x3R 49-30-060	09493003007	3000 K	60°	48,2 W	7838 lm	silber	590x192x80mm
StoreLED S 3x3R 49-35-060	09493503005	3500 K	60°	48,2 W	8200 lm	schwarz	590x192x80mm
StoreLED S 3x3R 49-35-060	09493503006	3500 K	60°	48,2 W	8200 lm	weiß	590x192x80mm
StoreLED S 3x3R 49-35-060	09493503007	3500 K	60°	48,2 W	8200 lm	silber	590x192x80mm
StoreLED S 3x3R 49-40-060	09494003005	4000 K	60°	48,2 W	8351 lm	schwarz	590x192x80mm
StoreLED S 3x3R 49-40-060	09494003006	4000 K	60°	48,2 W	8351 lm	weiß	590x192x80mm
StoreLED S 3x3R 49-40-060	09494003007	4000 K	60°	48,2 W	8351 lm	silber	590x192x80mm
StoreLED S 3x3R 49-50-060	09495003005	5000 K	60°	48,2 W	8351 lm	schwarz	590x192x80mm
StoreLED S 3x3R 49-50-060	09495003006	5000 K	60°	48,2 W	8351 lm	weiß	590x192x80mm
StoreLED S 3x3R 49-50-060	09495003007	5000 K	60°	48,2 W	8351 lm	silber	590x192x80mm
StoreLED S 3x3R 69-30-060	09693003005	3000 K	60°	68,9 W	10787 lm	schwarz	590x192x80mm
StoreLED S 3x3R 69-30-060	09693003006	3000 K	60°	68,9 W	10787 lm	weiß	590x192x80mm

StoreLED S 3x3R 69-30-060	09693003007	3000 K	60°	68,9 W	10787 lm	silber	590x192x80mm
StoreLED S 3x3R 69-35-060	09693503005	3500 K	60°	68,9 W	11265 lm	schwarz	590x192x80mm
StoreLED S 3x3R 69-35-060	09693503006	3500 K	60°	68,9 W	11265 lm	weiß	590x192x80mm
StoreLED S 3x3R 69-35-060	09693503007	3500 K	60°	68,9 W	11265 lm	silber	590x192x80mm
StoreLED S 3x3R 69-40-060	09694003005	4000 K	60°	68,9 W	11471 lm	schwarz	590x192x80mm
StoreLED S 3x3R 69-40-060	09694003006	4000 K	60°	68,9 W	11471 lm	weiß	590x192x80mm
StoreLED S 3x3R 69-40-060	09694003007	4000 K	60°	68,9 W	11471 lm	silber	590x192x80mm
StoreLED S 3x3R 69-50-060	09695003005	5000 K	60°	68,9 W	11471 lm	schwarz	590x192x80mm
StoreLED S 3x3R 69-50-060	09695003006	5000 K	60°	68,9 W	11471 lm	weiß	590x192x80mm
StoreLED S 3x3R 69-50-060	09695003007	5000 K	60°	68,9 W	11471 lm	silber	590x192x80mm

StoreLED S DALI



StoreLED ,3-row LEDs, 3-phase track, dimmable and non-dimmable, different light colors available, other light colours on request, different wattages, different colours, protection class IP 20, ENEC certified

Typ	Article Number	Light Colour	Optic	System Output	Luminous Flux System	Colour	Dimension
StoreLED S 3x3R 21-30-030 DALI	09213003005	3000 K	30°	19,4 W	3278 lm	schwarz	590x192x80mm
StoreLED S 3x3R 21-30-030 DALI	09213003006	3000 K	30°	19,4 W	3278 lm	weiß	590x192x80mm
StoreLED S 3x3R 21-30-030 DALI	09213003007	3000 K	30°	19,4 W	3278 lm	silber	590x192x80mm
StoreLED S 3x3R 21-35-030 DALI	09213503005	3500 K	30°	19,4 W	3426 lm	schwarz	590x192x80mm
StoreLED S 3x3R 21-35-030 DALI	09213503006	3500 K	30°	19,4 W	3426 lm	weiß	590x192x80mm
StoreLED S 3x3R 21-35-030 DALI	09213503007	3500 K	30°	19,4 W	3426 lm	silber	590x192x80mm
StoreLED S 3x3R 21-40-030 DALI	09214003005	4000 K	30°	19,4 W	3488 lm	schwarz	590x192x80mm
StoreLED S 3x3R 21-40-030 DALI	09214003006	4000 K	30°	19,4 W	3488 lm	weiß	590x192x80mm
StoreLED S 3x3R 21-40-030 DALI	09214003007	4000 K	30°	19,4 W	3488 lm	silber	590x192x80mm
StoreLED S 3x3R 21-50-030 DALI	09215003005	5000 K	30°	19,4 W	3488 lm	schwarz	590x192x80mm
StoreLED S 3x3R 21-50-030 DALI	09215003006	5000 K	30°	19,4 W	3488 lm	weiß	590x192x80mm
StoreLED S 3x3R 21-50-030 DALI	09215003007	5000 K	30°	19,4 W	3488 lm	silber	590x192x80mm

StoreLED S 3x3R 25-30-030 DALI	09253003005	3000 K	30°	22,9 W	3910 lm	schwarz	590x192x80mm
StoreLED S 3x3R 25-30-030 DALI	09253003006	3000 K	30°	22,9 W	3910 lm	weiß	590x192x80mm
StoreLED S 3x3R 25-30-030 DALI	09253003007	3000 K	30°	22,9 W	3910 lm	silber	590x192x80mm
StoreLED S 3x3R 25-35-030 DALI	09253503005	3500 K	30°	22,9 W	4092 lm	schwarz	590x192x80mm
StoreLED S 3x3R 25-35-030 DALI	09253503006	3500 K	30°	22,9 W	4092 lm	weiß	590x192x80mm
StoreLED S 3x3R 25-35-030 DALI	09253503007	3500 K	30°	22,9 W	4092 lm	silber	590x192x80mm
StoreLED S 3x3R 25-40-030 DALI	09254003005	4000 K	30°	22,9 W	4167 lm	schwarz	590x192x80mm
StoreLED S 3x3R 25-40-030 DALI	09254003006	4000 K	30°	22,9 W	4167 lm	weiß	590x192x80mm
StoreLED S 3x3R 25-40-030 DALI	09254003007	4000 K	30°	22,9 W	4167 lm	silber	590x192x80mm
StoreLED S 3x3R 25-50-030 DALI	09255003005	5000 K	30°	22,9 W	4167 lm	schwarz	590x192x80mm
StoreLED S 3x3R 25-50-030 DALI	09255003006	5000 K	30°	22,9 W	4167 lm	weiß	590x192x80mm
StoreLED S 3x3R 25-50-030 DALI	09255003007	5000 K	30°	22,9 W	4167 lm	silber	590x192x80mm
StoreLED S 3x3R 35-30-030 DALI	09353003005	3000 K	30°	33,7 W	5586 lm	schwarz	590x192x80mm
StoreLED S 3x3R 35-30-030 DALI	09353003006	3000 K	30°	33,7 W	5586 lm	weiß	590x192x80mm
StoreLED S 3x3R 35-30-030 DALI	09353003007	3000 K	30°	33,7 W	5586 lm	silber	590x192x80mm
StoreLED S 3x3R 35-35-030 DALI	09353503005	3500 K	30°	33,7 W	5835 lm	schwarz	590x192x80mm
StoreLED S 3x3R 35-35-030 DALI	09353503006	3500 K	30°	33,7 W	5835 lm	weiß	590x192x80mm
StoreLED S 3x3R 35-35-030 DALI	09353503007	3500 K	30°	33,7 W	5835 lm	silber	590x192x80mm
StoreLED S 3x3R 35-40-030 DALI	09354003005	4000 K	30°	33,7 W	5942 lm	schwarz	590x192x80mm
StoreLED S 3x3R 35-40-030 DALI	09354003006	4000 K	30°	33,7 W	5942 lm	weiß	590x192x80mm
StoreLED S 3x3R 35-40-030 DALI	09354003007	4000 K	30°	33,7 W	5942 lm	silber	590x192x80mm
StoreLED S 3x3R 35-50-030 DALI	09355003005	5000 K	30°	33,7 W	5942 lm	schwarz	590x192x80mm
StoreLED S 3x3R 35-50-030 DALI	09355003006	5000 K	30°	33,7 W	5942 lm	weiß	590x192x80mm
StoreLED S 3x3R 35-50-030 DALI	09355003007	5000 K	30°	33,7 W	5942 lm	silber	590x192x80mm
StoreLED S3x3R 40-30-030 DALI	09403003005	3000 K	30°	39,2 W	6341 lm	schwarz	590x192x80mm
StoreLED S3x3R 40-30-030 DALI	09403003006	3000 K	30°	39,2 W	6341 lm	weiß	590x192x80mm
StoreLED S3x3R 40-30-030 DALI	09403003007	3000 K	30°	39,2 W	6341 lm	silber	590x192x80mm
StoreLED S 3x3R 40-35-030 DALI	09403503005	3500 K	30°	39,2 W	6633 lm	schwarz	590x192x80mm
StoreLED S 3x3R 40-35-030 DALI	09403503006	3500 K	30°	39,2 W	6633 lm	weiß	590x192x80mm
StoreLED S 3x3R 40-35-030 DALI	09403503007	3500 K	30°	39,2 W	6633 lm	silber	590x192x80mm
StoreLED S 3x3R 40-40-030 DALI	09404003005	4000 K	30°	39,2 W	6755 lm	schwarz	590x192x80mm
StoreLED S 3x3R 40-40-030 DALI	09404003006	4000 K	30°	39,2 W	6755 lm	weiß	590x192x80mm
StoreLED S 3x3R 40-40-030 DALI	09404003007	4000 K	30°	39,2 W	6755 lm	silber	590x192x80mm
StoreLED S 3x3R 40-50-030 DALI	09405003005	5000 K	30°	39,2 W	6755 lm	schwarz	590x192x80mm
StoreLED S 3x3R 40-50-030 DALI	09405003006	5000 K	30°	39,2 W	6755 lm	weiß	590x192x80mm
StoreLED S 3x3R 40-50-030 DALI	09405003007	5000 K	30°	39,2 W	6755 lm	silber	590x192x80mm
StoreLED S3x3R 50-30-030 DALI	09503003005	3000 K	30°	49,5 W	7838 lm	schwarz	590x192x80mm
StoreLED S3x3R 50-30-030 DALI	09503003006	3000 K	30°	49,5 W	7838 lm	weiß	590x192x80mm
StoreLED S3x3R 50-30-030 DALI	09503003007	3000 K	30°	49,5 W	7838 lm	silber	590x192x80mm
StoreLED S 3x3R 50-35-030 DALI	09503503005	3500 K	30°	49,5 W	8200 lm	schwarz	590x192x80mm
StoreLED S 3x3R 50-35-030 DALI	09503503006	3500 K	30°	49,5 W	8200 lm	weiß	590x192x80mm
StoreLED S 3x3R 50-35-030 DALI	09503503007	3500 K	30°	49,5 W	8200 lm	silber	590x192x80mm
StoreLED S3x3R 50-40-030 DALI	09504003005	4000 K	30°	49,5 W	8351 lm	schwarz	590x192x80mm
StoreLED S3x3R 50-40-030 DALI	09504003006	4000 K	30°	49,5 W	8351 lm	weiß	590x192x80mm
StoreLED S3x3R 50-40-030 DALI	09504003007	4000 K	30°	49,5 W	8351 lm	silber	590x192x80mm
StoreLED S 3x3R 50-50-030 DALI	09505003005	5000 K	30°	49,5 W	8351 lm	schwarz	590x192x80mm

StoreLED S 3x3R 50-50-030 DALI	09505003006	5000 K	30°	49,5 W	8351 lm	weiß	590x192x80mm
StoreLED S 3x3R 50-50-030 DALI	09505003007	5000 K	30°	49,5 W	8351 lm	silber	590x192x80mm
StoreLED S 3x3R 70-30-030 DALI	09703003005	3000 K	30°	70,0 W	10787 lm	schwarz	590x192x80mm
StoreLED S 3x3R 70-30-030 DALI	09703003006	3000 K	30°	70,0 W	10787 lm	weiß	590x192x80mm
StoreLED S 3x3R 70-30-030 DALI	09703003007	3000 K	30°	70,0 W	10787 lm	silber	590x192x80mm
StoreLED S 3x3R 70-35-030 DALI	09703003005	3500 K	30°	70,0 W	11265 lm	schwarz	590x192x80mm
StoreLED S 3x3R 70-35-030 DALI	09703503006	3500 K	30°	70,0 W	11265 lm	weiß	590x192x80mm
StoreLED S 3x3R 70-35-030 DALI	09703503007	3500 K	30°	70,0 W	11265 lm	silber	590x192x80mm
StoreLED S 3x3R 70-40-030 DALI	09704003005	4000 K	30°	70,0 W	11471 lm	schwarz	590x192x80mm
StoreLED S 3x3R 70-40-030 DALI	09704003006	4000 K	30°	70,0 W	11471 lm	weiß	590x192x80mm
StoreLED S 3x3R 70-40-030 DALI	09704003007	4000 K	30°	70,0 W	11471 lm	silber	590x192x80mm
StoreLED S 3x3R 70-50-030 DALI	09705003005	5000 K	30°	70,0 W	11471 lm	schwarz	590x192x80mm
StoreLED S 3x3R 70-50-030 DALI	09705003006	5000 K	30°	70,0 W	11471 lm	weiß	590x192x80mm
StoreLED S 3x3R 70-50-030 DALI	09705003007	5000 K	30°	70,0 W	11471 lm	silber	590x192x80mm
StoreLED S 3x3R 21-30-060 DALI	09213003005	3000 K	60°	19,4 W	3278 lm	schwarz	590x192x80mm
StoreLED S 3x3R 21-30-060 DALI	09213003006	3000 K	60°	19,4 W	3278 lm	weiß	590x192x80mm
StoreLED S 3x3R 21-30-060 DALI	09213003007	3000 K	60°	19,4 W	3278 lm	silber	590x192x80mm
StoreLED S 3x3R 21-35-060 DALI	09213503005	3500 K	60°	19,4 W	3426 lm	schwarz	590x192x80mm
StoreLED S 3x3R 21-35-060 DALI	09213503006	3500 K	60°	19,4 W	3426 lm	weiß	590x192x80mm
StoreLED S 3x3R 21-35-060 DALI	09213503007	3500 K	60°	19,4 W	3426 lm	silber	590x192x80mm
StoreLED S 3x3R 21-40-060 DALI	09214003005	4000 K	60°	19,4 W	3488 lm	schwarz	590x192x80mm
StoreLED S 3x3R 21-40-060 DALI	09214003006	4000 K	60°	19,4 W	3488 lm	weiß	590x192x80mm
StoreLED S 3x3R 21-40-060 DALI	09214003007	4000 K	60°	19,4 W	3488 lm	silber	590x192x80mm
StoreLED S 3x3R 21-50-060 DALI	09215003005	5000 K	60°	19,4 W	3488 lm	schwarz	590x192x80mm
StoreLED S 3x3R 21-50-060 DALI	09215003006	5000 K	60°	19,4 W	3488 lm	weiß	590x192x80mm
StoreLED S 3x3R 21-50-060 DALI	09215003007	5000 K	60°	19,4 W	3488 lm	silber	590x192x80mm
StoreLED S 3x3R 25-30-060 DALI	09253003005	3000 K	60°	22,9 W	3910 lm	schwarz	590x192x80mm
StoreLED S 3x3R 25-30-060 DALI	09253003006	3000 K	60°	22,9 W	3910 lm	weiß	590x192x80mm
StoreLED S 3x3R 25-30-060 DALI	09253003007	3000 K	60°	22,9 W	3910 lm	silber	590x192x80mm
StoreLED S 3x3R 25-35-060 DALI	09253503005	3500 K	60°	22,9 W	4092 lm	schwarz	590x192x80mm
StoreLED S 3x3R 25-35-060 DALI	09253503006	3500 K	60°	22,9 W	4092 lm	weiß	590x192x80mm
StoreLED S 3x3R 25-35-060 DALI	09253503007	3500 K	60°	22,9 W	4092 lm	silber	590x192x80mm
StoreLED S 3x3R 25-40-060 DALI	09254003005	4000 K	60°	22,9 W	4167 lm	schwarz	590x192x80mm
StoreLED S 3x3R 25-40-060 DALI	09254003006	4000 K	60°	22,9 W	4167 lm	weiß	590x192x80mm
StoreLED S 3x3R 25-40-060 DALI	09254003007	4000 K	60°	22,9 W	4167 lm	silber	590x192x80mm
StoreLED S 3x3R 25-50-060 DALI	09255003005	5000 K	60°	22,9 W	4167 lm	schwarz	590x192x80mm
StoreLED S 3x3R 25-50-060 DALI	09255003006	5000 K	60°	22,9 W	4167 lm	weiß	590x192x80mm
StoreLED S 3x3R 25-50-060 DALI	09255003007	5000 K	60°	22,9 W	4167 lm	silber	590x192x80mm
StoreLED S 3x3R 35-30-060 DALI	09353003005	3000 K	60°	33,7 W	5586 lm	schwarz	590x192x80mm
StoreLED S 3x3R 35-30-060 DALI	09353003006	3000 K	60°	33,7 W	5586 lm	weiß	590x192x80mm
StoreLED S 3x3R 35-30-060 DALI	09353003007	3000 K	60°	33,7 W	5586 lm	silber	590x192x80mm
StoreLED S 3x3R 35-35-060 DALI	09353503005	3500 K	60°	33,7 W	5835 lm	schwarz	590x192x80mm
StoreLED S 3x3R 35-35-060 DALI	09353503006	3500 K	60°	33,7 W	5835 lm	weiß	590x192x80mm
StoreLED S 3x3R 35-35-060 DALI	09353503007	3500 K	60°	33,7 W	5835 lm	silber	590x192x80mm
StoreLED S 3x3R 35-40-060 DALI	09354003005	4000 K	60°	33,7 W	5942 lm	schwarz	590x192x80mm
StoreLED S 3x3R 35-40-060 DALI	09354003006	4000 K	60°	33,7 W	5942 lm	weiß	590x192x80mm

StoreLED S 3x3R 35-40-060 DALI	09354003007	4000 K	60°	33,7 W	5942 lm	silber	590x192x80mm
StoreLED S 3x3R 35-50-060 DALI	09355003005	5000 K	60°	33,7 W	5942 lm	schwarz	590x192x80mm
StoreLED S 3x3R 35-50-060 DALI	09355003006	5000 K	60°	33,7 W	5942 lm	weiß	590x192x80mm
StoreLED S 3x3R 35-50-060 DALI	09355003007	5000 K	60°	33,7 W	5942 lm	silber	590x192x80mm
StoreLED S3x3R 40-30-060 DALI	09403003005	3000 K	60°	39,2 W	6341 lm	schwarz	590x192x80mm
StoreLED S3x3R 40-30-060 DALI	09403003006	3000 K	60°	39,2 W	6341 lm	weiß	590x192x80mm
StoreLED S3x3R 40-30-060 DALI	09403003007	3000 K	60°	39,2 W	6341 lm	silber	590x192x80mm
StoreLED S 3x3R 40-35-060 DALI	09403503005	3500 K	60°	39,2 W	6633 lm	schwarz	590x192x80mm
StoreLED S 3x3R 40-35-060 DALI	09403503006	3500 K	60°	39,2 W	6633 lm	weiß	590x192x80mm
StoreLED S 3x3R 40-35-060 DALI	09403503007	3500 K	60°	39,2 W	6633 lm	silber	590x192x80mm
StoreLED S 3x3R 40-40-060 DALI	09404003005	4000 K	60°	39,2 W	6755 lm	schwarz	590x192x80mm
StoreLED S 3x3R 40-40-060 DALI	09404003006	4000 K	60°	39,2 W	6755 lm	weiß	590x192x80mm
StoreLED S 3x3R 40-40-060 DALI	09404003007	4000 K	60°	39,2 W	6755 lm	silber	590x192x80mm
StoreLED S 3x3R 40-50-060 DALI	09405003005	5000 K	60°	39,2 W	6755 lm	schwarz	590x192x80mm
StoreLED S 3x3R 40-50-060 DALI	09405003006	5000 K	60°	39,2 W	6755 lm	weiß	590x192x80mm
StoreLED S 3x3R 40-50-060 DALI	09405003007	5000 K	60°	39,2 W	6755 lm	silber	590x192x80mm
StoreLED S3x3R 50-30-060 DALI	09503003005	3000 K	60°	49,5 W	7838 lm	schwarz	590x192x80mm
StoreLED S3x3R 50-30-060 DALI	09503003006	3000 K	60°	49,5 W	7838 lm	weiß	590x192x80mm
StoreLED S3x3R 50-30-060 DALI	09503003007	3000 K	60°	49,5 W	7838 lm	silber	590x192x80mm
StoreLED S 3x3R 50-35-060 DALI	09503503005	3500 K	60°	49,5 W	8200 lm	schwarz	590x192x80mm
StoreLED S 3x3R 50-35-060 DALI	09503503006	3500 K	60°	49,5 W	8200 lm	weiß	590x192x80mm
StoreLED S 3x3R 50-35-060 DALI	09503503007	3500 K	60°	49,5 W	8200 lm	silber	590x192x80mm
StoreLED S3x3R 50-40-060 DALI	09504003005	4000 K	60°	49,5 W	8351 lm	schwarz	590x192x80mm
StoreLED S3x3R 50-40-060 DALI	09504003006	4000 K	60°	49,5 W	8351 lm	weiß	590x192x80mm
StoreLED S3x3R 50-40-060 DALI	09504003007	4000 K	60°	49,5 W	8351 lm	silber	590x192x80mm
StoreLED S 3x3R 50-50-060 DALI	09505003005	5000 K	60°	49,5 W	8351 lm	schwarz	590x192x80mm
StoreLED S 3x3R 50-50-060 DALI	09505003006	5000 K	60°	49,5 W	8351 lm	weiß	590x192x80mm
StoreLED S 3x3R 50-50-060 DALI	09505003007	5000 K	60°	49,5 W	8351 lm	silber	590x192x80mm
StoreLED S 3x3R 70-30-060 DALI	09703003005	3000 K	60°	70,0 W	10787 lm	schwarz	590x192x80mm
StoreLED S 3x3R 70-30-060 DALI	09703003006	3000 K	60°	70,0 W	10787 lm	weiß	590x192x80mm
StoreLED S 3x3R 70-30-060 DALI	09703003007	3000 K	60°	70,0 W	10787 lm	silber	590x192x80mm
StoreLED S 3x3R 70-35-060 DALI	09703003005	3500 K	60°	70,0 W	11265 lm	schwarz	590x192x80mm
StoreLED S 3x3R 70-35-060 DALI	09703503006	3500 K	60°	70,0 W	11265 lm	weiß	590x192x80mm
StoreLED S 3x3R 70-35-060 DALI	09703503007	3500 K	60°	70,0 W	11265 lm	silber	590x192x80mm
StoreLED S 3x3R 70-40-060 DALI	09704003005	4000 K	60°	70,0 W	11471 lm	schwarz	590x192x80mm
StoreLED S 3x3R 70-40-060 DALI	09704003006	4000 K	60°	70,0 W	11471 lm	weiß	590x192x80mm
StoreLED S 3x3R 70-40-060 DALI	09704003007	4000 K	60°	70,0 W	11471 lm	silber	590x192x80mm
StoreLED S 3x3R 70-50-060 DALI	09705003005	5000 K	60°	70,0 W	11471 lm	schwarz	590x192x80mm
StoreLED S 3x3R 70-50-060 DALI	09705003006	5000 K	60°	70,0 W	11471 lm	weiß	590x192x80mm
StoreLED S 3x3R 70-50-060 DALI	09705003007	5000 K	60°	70,0 W	11471 lm	silber	590x192x80mm

InduLED

high-quality, ready-to-connect LED-single luminaire

3-row LEDs

optics for every requirement (60°, 110°, and high rack)

energy efficiency class A / system luminous flux up to 180
lumens per watt

absolutely homogeneous illumination / light colors 3.000 K,
4.000 K & 5.000 K

high-quality connection system 3- to 10-pole

tight colour tolerance MacAdam 3

very good colour rendering CRI type. 85

5-years system guarantee / Service life > 60.000 hours

ENEC certified



Protection category IP 54 / protection class I

different installation options (suspension, ceiling installation,
mounting aid and tray installation)


colour white RAL 9016

special designs on customer request

various accessories available

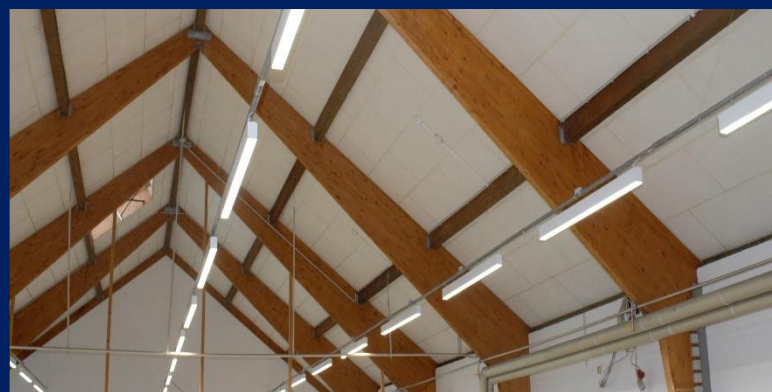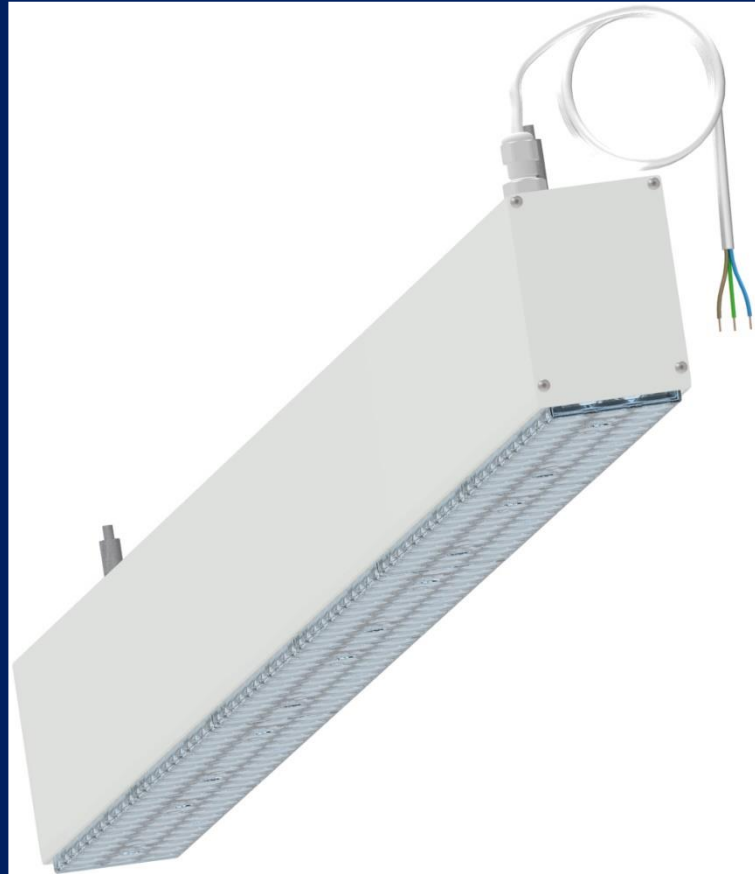

InduLED AE

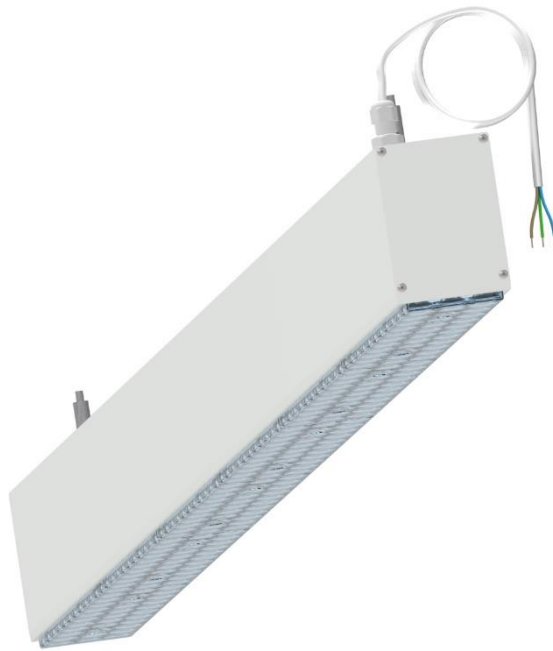


LED-single luminaire, 3-row LEDs, different installation options, different light colours are available, Last digit 0: commuting; 3: cable route; other light 5: colours on request, different wattages, different lengths, various optics, protection category IP54, DALI is available, ENEC certified

Type	Article Number	Light Colour	Optics	System Output	Luminous Flux System	Polzahl	Dimesion
InduLED 23-1798 AE	73723400020	4000 K	High Rack	23,2 W	4167 lm	3-polig	1798x71x106 mm
InduLED 23-1798 AE	73723400023	4000 K	High Rack	23,2 W	4167 lm	3-polig	1798x71x106 mm
InduLED 23-1798 AE	73723400025	4000 K	High Rack	23,2 W	4167 lm	3-polig	1798x71x106 mm
InduLED 23-1798 AE	73723400600	4000 K	60°	23,2 W	4167 lm	3-polig	1798x71x106 mm
InduLED 23-1798 AE	73723400603	4000 K	60°	23,2 W	4167 lm	3-polig	1798x71x106 mm
InduLED 23-1798 AE	73723400605	4000 K	60°	23,2 W	4167 lm	3-polig	1798x71x106 mm
InduLED 23-1798 AE	73723400900	4000 K	90°	23,2 W	4167 lm	3-polig	1798x71x106 mm
InduLED 23-1798 AE	73723400903	4000 K	90°	23,2 W	4167 lm	3-polig	1798x71x106 mm
InduLED 23-1798 AE	73723400905	4000 K	90°	23,2 W	4167 lm	3-polig	1798x71x106 mm
InduLED 23-1798 AE	73723500020	5000 K	High Rack	23,2 W	4167 lm	3-polig	1798x71x106 mm
InduLED 23-1798 AE	73723500023	5000 K	High Rack	23,2 W	4167 lm	3-polig	1798x71x106 mm
InduLED 23-1798 AE	73723500025	5000 K	High Rack	23,2 W	4167 lm	3-polig	1798x71x106 mm
InduLED 23-1798 AE	73723500600	5000 K	60°	23,2 W	4167 lm	3-polig	1798x71x106 mm
InduLED 23-1798 AE	73723500603	5000 K	60°	23,2 W	4167 lm	3-polig	1798x71x106 mm
InduLED 23-1798 AE	73723500605	5000 K	60°	23,2 W	4167 lm	3-polig	1798x71x106 mm
InduLED 23-1798 AE	73723500900	5000 K	90°	23,2 W	4167 lm	3-polig	1798x71x106 mm
InduLED 23-1798 AE	73723500903	5000 K	90°	23,2 W	4167 lm	3-polig	1798x71x106 mm
InduLED 23-1798 AE	73723500905	5000 K	90°	23,2 W	4167 lm	3-polig	1798x71x106 mm
InduLED 26-1798 AE	73726400020	4000 K	High Rack	26,6 W	4814 lm	3-polig	1798x71x106 mm
InduLED 26-1798 AE	73726400023	4000 K	High Rack	26,6 W	4814 lm	3-polig	1798x71x106 mm
InduLED 26-1798 AE	73726400025	4000 K	High Rack	26,6 W	4814 lm	3-polig	1798x71x106 mm
InduLED 26-1798 AE	73726400600	4000 K	60°	26,6 W	4814 lm	3-polig	1798x71x106 mm
InduLED 26-1798 AE	73726400603	4000 K	60°	26,6 W	4814 lm	3-polig	1798x71x106 mm
InduLED 26-1798 AE	73726400605	4000 K	60°	26,6 W	4814 lm	3-polig	1798x71x106 mm
InduLED 26-1798 AE	73726400900	4000 K	90°	26,6 W	4814 lm	3-polig	1798x71x106 mm
InduLED 26-1798 AE	73726400903	4000 K	90°	26,6 W	4814 lm	3-polig	1798x71x106 mm
InduLED 26-1798 AE	73726400905	4000 K	90°	26,6 W	4814 lm	3-polig	1798x71x106 mm
InduLED 26-1798 AE	73726500020	5000 K	High Rack	26,6 W	4814 lm	3-polig	1798x71x106 mm
InduLED 26-1798 AE	73726500023	5000 K	High Rack	26,6 W	4814 lm	3-polig	1798x71x106 mm
InduLED 26-1798 AE	73726500025	5000 K	High Rack	26,6 W	4814 lm	3-polig	1798x71x106 mm
InduLED 26-1798 AE	73726500600	5000 K	60°	26,6 W	4814 lm	3-polig	1798x71x106 mm
InduLED 26-1798 AE	73726500603	5000 K	60°	26,6 W	4814 lm	3-polig	1798x71x106 mm
InduLED 26-1798 AE	73726500605	5000 K	60°	26,6 W	4814 lm	3-polig	1798x71x106 mm
InduLED 26-1798 AE	73726500900	5000 K	90°	26,6 W	4814 lm	3-polig	1798x71x106 mm
InduLED 26-1798 AE	73726500903	5000 K	90°	26,6 W	4814 lm	3-polig	1798x71x106 mm
InduLED 26-1798 AE	73726500905	5000 K	90°	26,6 W	4814 lm	3-polig	1798x71x106 mm
InduLED 33-1798 AE	73733400020	4000 K	High Rack	33,5 W	5942 lm	3-polig	1798x71x106 mm
InduLED 33-1798 AE	73733400023	4000 K	High Rack	33,5 W	5942 lm	3-polig	1798x71x106 mm
InduLED 33-1798 AE	73733400025	4000 K	High Rack	33,5 W	5942 lm	3-polig	1798x71x106 mm
InduLED 33-1798 AE	73733400600	4000 K	60°	33,5 W	5942 lm	3-polig	1798x71x106 mm

[illegible]

[illegible]

InduLED IP DALI

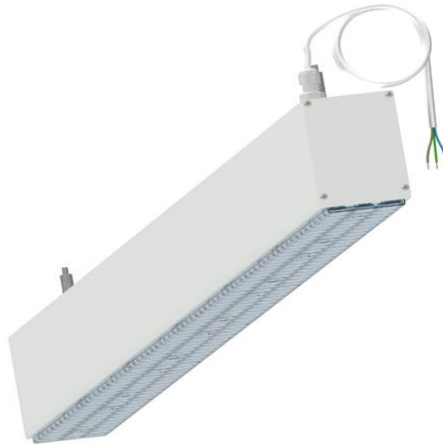


LED-single luminaire, 3-row LEDs, different installation options, different light colours are available, Last digit 0: commuting; 3: cable route; other light colours on request, different wattages, different lengths, various optics, protection category IP54, DALI is available, ENEC certified

Type	Article Number	Light Colour	Optics	System Output	Luminous Flux System	Polzahl	Dimesion
InduLED 39-1798 AE DALI	76739400020	4000 K	High Rack	39,2 W	6755 lm	5-polig	1798x71x106 mm
InduLED 39-1798 AE DALI	76739400023	4000 K	High Rack	39,2 W	6755 lm	5-polig	1798x71x106 mm
InduLED 39-1798 AE DALI	76739400025	4000 K	High Rack	39,2 W	6755 lm	5-polig	1798x71x106 mm
InduLED 39-1798 AE DALI	76739400600	4000 K	60°	39,2 W	6755 lm	5-polig	1798x71x106 mm
InduLED 39-1798 AE DALI	76739400603	4000 K	60°	39,2 W	6755 lm	5-polig	1798x71x106 mm
InduLED 39-1798 AE DALI	76739400605	4000 K	60°	39,2 W	6755 lm	5-polig	1798x71x106 mm
InduLED 39-1798 AE DALI	76739400900	4000 K	110°	39,2 W	6755 lm	5-polig	1798x71x106 mm
InduLED 39-1798 AE DALI	76739400903	4000 K	110°	39,2 W	6755 lm	5-polig	1798x71x106 mm
InduLED 39-1798 AE DALI	76739400905	4000 K	110°	39,2 W	6755 lm	5-polig	1798x71x106 mm
InduLED 39-1798 AE DALI	76739500020	5000 K	High Rack	39,2 W	6755 lm	5-polig	1798x71x106 mm
InduLED 39-1798 AE DALI	76739500023	5000 K	High Rack	39,2 W	6755 lm	5-polig	1798x71x106 mm
InduLED 39-1798 AE DALI	76739500025	5000 K	High Rack	39,2 W	6755 lm	5-polig	1798x71x106 mm
InduLED 39-1798 AE DALI	76739500600	5000 K	60°	39,2 W	6755 lm	5-polig	1798x71x106 mm
InduLED 39-1798 AE DALI	76739500603	5000 K	60°	39,2 W	6755 lm	5-polig	1798x71x106 mm
InduLED 39-1798 AE DALI	76739500605	5000 K	60°	39,2 W	6755 lm	5-polig	1798x71x106 mm
InduLED 39-1798 AE DALI	76739500900	5000 K	110°	39,2 W	6755 lm	5-polig	1798x71x106 mm
InduLED 39-1798 AE DALI	76739500903	5000 K	110°	39,2 W	6755 lm	5-polig	1798x71x106 mm
InduLED 39-1798 AE DALI	76739500905	5000 K	110°	39,2 W	6755 lm	5-polig	1798x71x106 mm
InduLED 49-1798 AE DALI	76749400020	4000 K	High Rack	49,5 W	8351 lm	5-polig	1798x71x106 mm
InduLED 49-1798 AE DALI	76749400023	4000 K	High Rack	49,5 W	8351 lm	5-polig	1798x71x106 mm
InduLED 49-1798 AE DALI	76749400025	4000 K	High Rack	49,5 W	8351 lm	5-polig	1798x71x106 mm
InduLED 49-1798 AE DALI	76749400600	4000 K	60°	49,5 W	8351 lm	5-polig	1798x71x106 mm
InduLED 49-1798 AE DALI	76749400603	4000 K	60°	49,5 W	8351 lm	5-polig	1798x71x106 mm
InduLED 49-1798 AE DALI	76749400605	4000 K	60°	49,5 W	8351 lm	5-polig	1798x71x106 mm
InduLED 49-1798 AE DALI	76749400900	4000 K	110°	49,5 W	8351 lm	5-polig	1798x71x106 mm
InduLED 49-1798 AE DALI	76749400903	4000 K	110°	49,5 W	8351 lm	5-polig	1798x71x106 mm
InduLED 49-1798 AE DALI	76749400905	4000 K	110°	49,5 W	8351 lm	5-polig	1798x71x106 mm
InduLED 49-1798 AE DALI	76749500020	5000 K	High Rack	49,5 W	8351 lm	5-polig	1798x71x106 mm
InduLED 49-1798 AE DALI	76749500023	5000 K	High Rack	49,5 W	8351 lm	5-polig	1798x71x106 mm
InduLED 49-1798 AE DALI	76749500025	5000 K	High Rack	49,5 W	8351 lm	5-polig	1798x71x106 mm
InduLED 49-1798 AE DALI	76749500600	5000 K	60°	49,5 W	8351 lm	5-polig	1798x71x106 mm
InduLED 49-1798 AE DALI	76749500603	5000 K	60°	49,5 W	8351 lm	5-polig	1798x71x106 mm
InduLED 49-1798 AE DALI	76749500605	5000 K	60°	49,5 W	8351 lm	5-polig	1798x71x106 mm
InduLED 49-1798 AE DALI	76749500900	5000 K	110°	49,5 W	8351 lm	5-polig	1798x71x106 mm
InduLED 49-1798 AE DALI	76749500903	5000 K	110°	49,5 W	8351 lm	5-polig	1798x71x106 mm
InduLED 49-1798 AE DALI	76749500905	5000 K	110°	49,5 W	8351 lm	5-polig	1798x71x106 mm
InduLED 60-1798 AE DALI	76760400020	4000 K	High Rack	60,0 W	9947 lm	5-polig	1798x71x106 mm
InduLED 60-1798 AE DALI	76760400023	4000 K	High Rack	60,0 W	9947 lm	5-polig	1798x71x106 mm
InduLED 60-1798 AE DALI	76760400025	4000 K	High Rack	60,0 W	9947 lm	5-polig	1798x71x106 mm
InduLED 60-1798 AE DALI	76760400600	4000 K	60°	60,0 W	9947 lm	5-polig	1798x71x106 mm
InduLED 60-1798 AE DALI	76760400603	4000 K	60°	60,0 W	9947 lm	5-polig	1798x71x106 mm
InduLED 60-1798 AE DALI	76760400605	4000 K	60°	60,0 W	9947 lm	5-polig	1798x71x106 mm
InduLED 60-1798 AE DALI	76760400900	4000 K	110°	60,0 W	9947 lm	5-polig	1798x71x106 mm

InduLED 60-1798 AE DALI	76760400903	4000 K	110°	60,0 W	9947 lm	5-polig	1798x71x106 mm
InduLED 60-1798 AE DALI	76760400905	4000 K	110°	60,0 W	9947 lm	5-polig	1798x71x106 mm
InduLED 60-1798 AE DALI	76760500020	5000 K	High Rack	60,0 W	9947 lm	5-polig	1798x71x106 mm
InduLED 60-1798 AE DALI	76760500023	5000 K	High Rack	60,0 W	9947 lm	5-polig	1798x71x106 mm
InduLED 60-1798 AE DALI	76760500025	5000 K	High Rack	60,0 W	9947 lm	5-polig	1798x71x106 mm
InduLED 60-1798 AE DALI	76760500600	5000 K	60°	60,0 W	9947 lm	5-polig	1798x71x106 mm
InduLED 60-1798 AE DALI	76760500603	5000 K	60°	60,0 W	9947 lm	5-polig	1798x71x106 mm
InduLED 60-1798 AE DALI	76760500605	5000 K	60°	60,0 W	9947 lm	5-polig	1798x71x106 mm
InduLED 60-1798 AE DALI	76760500900	5000 K	110°	60,0 W	9947 lm	5-polig	1798x71x106 mm
InduLED 60-1798 AE DALI	76760500903	5000 K	110°	60,0 W	9947 lm	5-polig	1798x71x106 mm
InduLED 60-1798 AE DALI	76760500905	5000 K	110°	60,0 W	9947 lm	5-polig	1798x71x106 mm
InduLED 70-1798 AE DALI	76770400020	4000 K	High Rack	70,0 W	11471 lm	5-polig	1798x71x106 mm
InduLED 70-1798 AE DALI	76770400023	4000 K	High Rack	70,0 W	11471 lm	5-polig	1798x71x106 mm
InduLED 70-1798 AE DALI	76770400025	4000 K	High Rack	70,0 W	11471 lm	5-polig	1798x71x106 mm
InduLED 70-1798 AE DALI	76770400600	4000 K	60°	70,0 W	11471 lm	5-polig	1798x71x106 mm
InduLED 70-1798 AE DALI	76770400603	4000 K	60°	70,0 W	11471 lm	5-polig	1798x71x106 mm
InduLED 70-1798 AE DALI	76770400605	4000 K	60°	70,0 W	11471 lm	5-polig	1798x71x106 mm
InduLED 70-1798 AE DALI	76770400900	4000 K	110°	70,0 W	11471 lm	5-polig	1798x71x106 mm
InduLED 70-1798 AE DALI	76770400903	4000 K	110°	70,0 W	11471 lm	5-polig	1798x71x106 mm
InduLED 70-1798 AE DALI	76770400905	4000 K	110°	70,0 W	11471 lm	5-polig	1798x71x106 mm
InduLED 70-1798 AE DALI	76770500020	5000 K	High Rack	70,0 W	11471 lm	5-polig	1798x71x106 mm
InduLED 70-1798 AE DALI	76770500023	5000 K	High Rack	70,0 W	11471 lm	5-polig	1798x71x106 mm
InduLED 70-1798 AE DALI	76770500025	5000 K	High Rack	70,0 W	11471 lm	5-polig	1798x71x106 mm
InduLED 70-1798 AE DALI	76770500600	5000 K	60°	70,0 W	11471 lm	5-polig	1798x71x106 mm
InduLED 70-1798 AE DALI	76770500603	5000 K	60°	70,0 W	11471 lm	5-polig	1798x71x106 mm
InduLED 70-1798 AE DALI	76770500605	5000 K	60°	70,0 W	11471 lm	5-polig	1798x71x106 mm
InduLED 70-1798 AE DALI	76770500900	5000 K	110°	70,0 W	11471 lm	5-polig	1798x71x106 mm
InduLED 70-1798 AE DALI	76770500903	5000 K	110°	70,0 W	11471 lm	5-polig	1798x71x106 mm
InduLED 70-1798 AE DALI	76770500905	5000 K	110°	70,0 W	11471 lm	5-polig	1798x71x106 mm

InduLED Series Luminaire

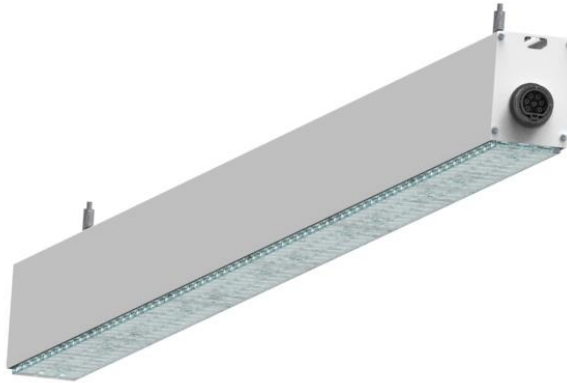

LED-series luminaire, 3-row LEDs, different installation options, different light colours are available, Last digit 0: commuting; 3: cable route; 5: deck assembly, other light colours on request, different wattages, different lengths, various optics, protection category IP54, DALI is available, high-quality plug-in system connectors , ENEC certified

Type	Article Number	Light Colour	Optics	System Output	Luminous Flux System	Polzahl	Dimesion
InduLED 23-1798 S	73923400020	4000 K	High Rack	23,2 W	4167 lm	3-polig	1798x71x106 mm
InduLED 23-1798 S	73923400023	4000 K	High Rack	23,2 W	4167 lm	3-polig	1798x71x106 mm
InduLED 23-1798 S	73923400025	4000 K	High Rack	23,2 W	4167 lm	3-polig	1798x71x106 mm
InduLED 23-1798 S	73923400600	4000 K	60°	23,2 W	4167 lm	3-polig	1798x71x106 mm
InduLED 23-1798 S	73923400603	4000 K	60°	23,2 W	4167 lm	3-polig	1798x71x106 mm
InduLED 23-1798 S	73923400605	4000 K	60°	23,2 W	4167 lm	3-polig	1798x71x106 mm
InduLED 23-1798 S	73923400900	4000 K	110°	23,2 W	4167 lm	3-polig	1798x71x106 mm
InduLED 23-1798 S	73923400903	4000 K	110°	23,2 W	4167 lm	3-polig	1798x71x106 mm
InduLED 23-1798 S	73923400905	4000 K	110°	23,2 W	4167 lm	3-polig	1798x71x106 mm
InduLED 23-1798 S	73923500020	5000 K	High Rack	23,2 W	4167 lm	3-polig	1798x71x106 mm
InduLED 23-1798 S	73923500023	5000 K	High Rack	23,2 W	4167 lm	3-polig	1798x71x106 mm
InduLED 23-1798 S	73923500025	5000 K	High Rack	23,2 W	4167 lm	3-polig	1798x71x106 mm
InduLED 23-1798 S	73923500600	5000 K	60°	23,2 W	4167 lm	3-polig	1798x71x106 mm
InduLED 23-1798 S	73923500603	5000 K	60°	23,2 W	4167 lm	3-polig	1798x71x106 mm
InduLED 23-1798 S	73923500605	5000 K	60°	23,2 W	4167 lm	3-polig	1798x71x106 mm
InduLED 23-1798 S	73923500900	5000 K	110°	23,2 W	4167 lm	3-polig	1798x71x106 mm
InduLED 23-1798 S	73923500903	5000 K	110°	23,2 W	4167 lm	3-polig	1798x71x106 mm
InduLED 23-1798 S	73923500905	5000 K	110°	23,2 W	4167 lm	3-polig	1798x71x106 mm
InduLED 23-1798 S	75923400020	4000 K	High Rack	23,2 W	4167 lm	5-polig	1798x71x106 mm
InduLED 23-1798 S	75923400023	4000 K	High Rack	23,2 W	4167 lm	5-polig	1798x71x106 mm
InduLED 23-1798 S	75923400025	4000 K	High Rack	23,2 W	4167 lm	5-polig	1798x71x106 mm
InduLED 23-1798 S	75923400600	4000 K	60°	23,2 W	4167 lm	5-polig	1798x71x106 mm
InduLED 23-1798 S	75923400603	4000 K	60°	23,2 W	4167 lm	5-polig	1798x71x106 mm
InduLED 23-1798 S	75923400605	4000 K	60°	23,2 W	4167 lm	5-polig	1798x71x106 mm
InduLED 23-1798 S	75923400900	4000 K	110°	23,2 W	4167 lm	5-polig	1798x71x106 mm
InduLED 23-1798 S	75923400903	4000 K	110°	23,2 W	4167 lm	5-polig	1798x71x106 mm
InduLED 23-1798 S	75923400905	4000 K	110°	23,2 W	4167 lm	5-polig	1798x71x106 mm
InduLED 23-1798 S	75923500020	5000 K	High Rack	23,2 W	4167 lm	5-polig	1798x71x106 mm
InduLED 23-1798 S	75923500023	5000 K	High Rack	23,2 W	4167 lm	5-polig	1798x71x106 mm
InduLED 23-1798 S	75923500025	5000 K	High Rack	23,2 W	4167 lm	5-polig	1798x71x106 mm
InduLED 23-1798 S	76213114282	4000 K	High Rack	23,2 W	4167 lm	3-polig	1798x71x106 mm
InduLED 23-1798 S	76309222271	4000 K	High Rack	23,2 W	4167 lm	3-polig	1798x71x106 mm
InduLED 23-1798 S	76405330259	4000 K	High Rack	23,2 W	4167 lm	3-polig	1798x71x106 mm
InduLED 23-1798 S	76501438247	4000 K	60°	23,2 W	4167 lm	3-polig	1798x71x106 mm
InduLED 23-1798 S	76597546236	4000 K	60°	23,2 W	4167 lm	3-polig	1798x71x106 mm
InduLED 23-1798 S	76693654224	4000 K	60°	23,2 W	4167 lm	3-polig	1798x71x106 mm
InduLED 26-1798 S	73926400020	4000 K	High Rack	26,6 W	4814 lm	3-polig	1798x71x106 mm
InduLED 26-1798 S	73926400023	4000 K	High Rack	26,6 W	4814 lm	3-polig	1798x71x106 mm
InduLED 26-1798 S	73926400025	4000 K	High Rack	26,6 W	4814 lm	3-polig	1798x71x106 mm
InduLED 26-1798 S	73926400600	4000 K	60°	26,6 W	4814 lm	3-polig	1798x71x106 mm
InduLED 26-1798 S	73926400603	4000 K	60°	26,6 W	4814 lm	3-polig	1798x71x106 mm
InduLED 26-1798 S	73926400605	4000 K	60°	26,6 W	4814 lm	3-polig	1798x71x106 mm
InduLED 26-1798 S	73926400900	4000 K	110°	26,6 W	4814 lm	3-polig	1798x71x106 mm
InduLED 26-1798 S	73926400903	4000 K	110°	26,6 W	4814 lm	3-polig	1798x71x106 mm

[illegible]


[illegible]

[illegible]

[illegible]

InduLED 69-1798 S	73969500600	5000 K	60°	68,9 W	11471 lm	3-polig	1798x71x106 mm
InduLED 69-1798 S	73969500603	5000 K	60°	68,9 W	11471 lm	3-polig	1798x71x106 mm
InduLED 69-1798 S	73969500605	5000 K	60°	68,9 W	11471 lm	3-polig	1798x71x106 mm
InduLED 69-1798 S	73969500900	5000 K	110°	68,9 W	11471 lm	3-polig	1798x71x106 mm
InduLED 69-1798 S	73969500903	5000 K	110°	68,9 W	11471 lm	3-polig	1798x71x106 mm
InduLED 69-1798 S	73969500905	5000 K	110°	68,9 W	11471 lm	3-polig	1798x71x106 mm
InduLED 69-1798 S	75969400020	4000 K	High Rack	68,9 W	11471 lm	5-polig	1798x71x106 mm
InduLED 69-1798 S	75969400023	4000 K	High Rack	68,9 W	11471 lm	5-polig	1798x71x106 mm
InduLED 69-1798 S	75969400025	4000 K	High Rack	68,9 W	11471 lm	5-polig	1798x71x106 mm
InduLED 69-1798 S	75969400600	4000 K	60°	68,9 W	11471 lm	5-polig	1798x71x106 mm
InduLED 69-1798 S	75969400603	4000 K	60°	68,9 W	11471 lm	5-polig	1798x71x106 mm
InduLED 69-1798 S	75969400605	4000 K	60°	68,9 W	11471 lm	5-polig	1798x71x106 mm
InduLED 69-1798 S	75969400900	4000 K	110°	68,9 W	11471 lm	5-polig	1798x71x106 mm
InduLED 69-1798 S	75969400903	4000 K	110°	68,9 W	11471 lm	5-polig	1798x71x106 mm
InduLED 69-1798 S	75969400905	4000 K	110°	68,9 W	11471 lm	5-polig	1798x71x106 mm
InduLED 69-1798 S	75969500020	5000 K	High Rack	68,9 W	11471 lm	5-polig	1798x71x106 mm
InduLED 69-1798 S	75969500023	5000 K	High Rack	68,9 W	11471 lm	5-polig	1798x71x106 mm
InduLED 69-1798 S	75969500025	5000 K	High Rack	68,9 W	11471 lm	5-polig	1798x71x106 mm
InduLED 69-1798 S	75969500600	5000 K	60°	68,9 W	11471 lm	5-polig	1798x71x106 mm
InduLED 69-1798 S	75969500603	5000 K	60°	68,9 W	11471 lm	5-polig	1798x71x106 mm
InduLED 69-1798 S	75969500605	5000 K	60°	68,9 W	11471 lm	5-polig	1798x71x106 mm
InduLED 69-1798 S	75969500900	5000 K	110°	68,9 W	11471 lm	5-polig	1798x71x106 mm
InduLED 69-1798 S	75969500903	5000 K	110°	68,9 W	11471 lm	5-polig	1798x71x106 mm
InduLED 69-1798 S	75969500905	5000 K	110°	68,9 W	11471 lm	5-polig	1798x71x106 mm

InduLED Series Luminaire DALI

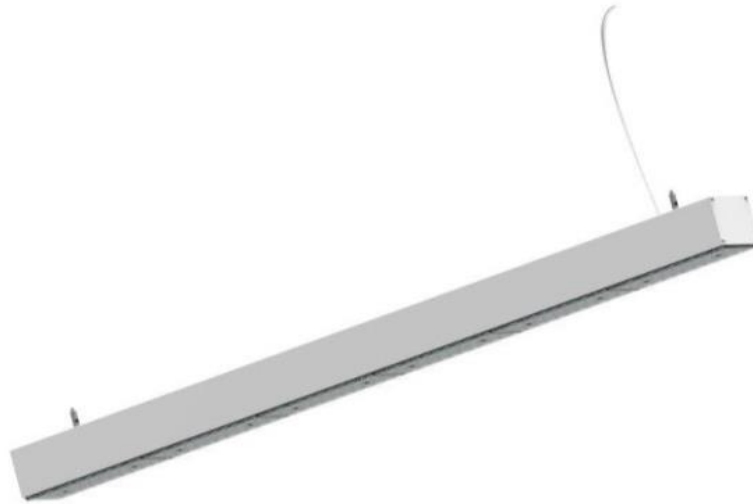

LED-series luminaire, 3-row LEDs, different installation options, different light colours are available Last digit 0: commuting; 3: cable route; 5: deck assembly, other light colours on request, different wattages, different lengths, various optics, protection category IP54, DALI is available, high-quality plug-in system connectors, ENEC certified

Type	Article Number	Light Colour	Optics	System Output	Luminous Flux System	Polzahl	Dimesion
InduLED 39-1798 S DALI	76939400020	4000 K	High Rack	39,2 W	6755 lm	5-polig	1798x71x106 mm
InduLED 39-1798 S DALI	76939400023	4000 K	High Rack	39,2 W	6755 lm	5-polig	1798x71x106 mm
InduLED 39-1798 S DALI	76939400025	4000 K	High Rack	39,2 W	6755 lm	5-polig	1798x71x106 mm
InduLED 39-1798 S DALI	76939400600	4000 K	60°	39,2 W	6755 lm	5-polig	1798x71x106 mm
InduLED 39-1798 S DALI	76939400603	4000 K	60°	39,2 W	6755 lm	5-polig	1798x71x106 mm
InduLED 39-1798 S DALI	76939400605	4000 K	60°	39,2 W	6755 lm	5-polig	1798x71x106 mm
InduLED 39-1798 S DALI	76939400900	4000 K	110°	39,2 W	6755 lm	5-polig	1798x71x106 mm

[illegible]

[illegible]

[illegible]

HaLED

high-quality, ready-to-connect LED - single luminaires for ceiling lighting, continuous-row systems or track system

various covers (satined or clear)

energy efficiency class A/ system luminous flux up to 175 lumens per watt

absolutely homogeneous illumination

light colours 3.000 K, 4.000 K & 5.000 K

Beam angle 120°

tight colour tolerance MacAdam 3 / very good

colour rendering CRI type. 85

5-years system guarantee

service life > 60.000 hours

ENEC certified

high-quality connection system


Protection category IP 20 or IP 54 / protection class I

upon request dimmable and can be integrated into building management systems

colour white

special designs on customer request

various accessories available

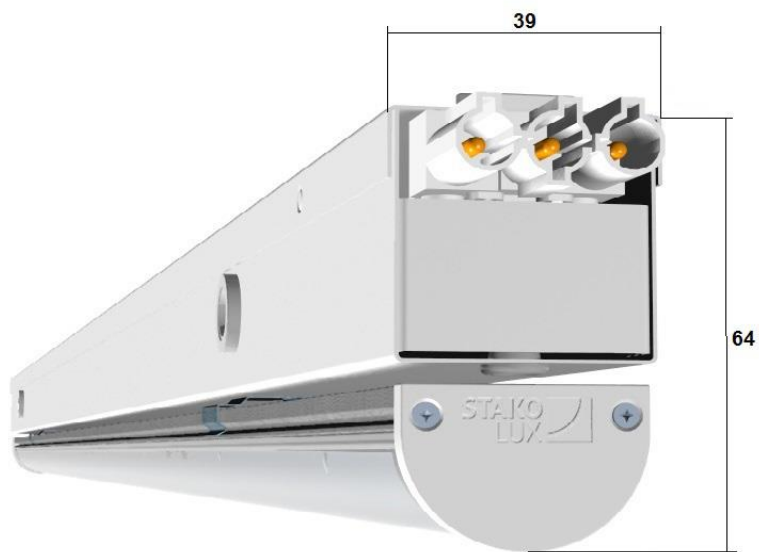

HalLED Single Luminaire



Single luminaire with plug and socket in the housing, suspension or ceiling installation or strip light profile, different light colours are available, other light colours on request, different wattages, different lengths, dimmable versions, various covers, protection category IP20, ENEC certified

Type	Article Number	Light Colour	Optic	System Output	Luminous Flux System	Dimension
HalLED 11-585 AE	87011303001	3000 K	satined	10,4 W	1082 lm	585x39x64 mm
HalLED 11-585 AE	87011403001	4000 K	satined	10,4 W	1153 lm	585x39x64 mm
HalLED 11-585 AE	87011503001	5000 K	satined	10,4 W	1153 lm	585x39x64 mm
HalLED 16-865 AE	87016303001	3000 K	satined	15,0 W	2138 lm	865x39x64 mm
HalLED 16-865 AE dim	87016303002	3000 K	satined	15,2 W	2138 lm	865x39x64 mm
HalLED 16-865 AE	87016303007	3000 K	clear	15,0 W	2357 lm	865x39x64 mm
HalLED 16-865 AE dim	87016303008	3000 K	clear	15,2 W	2357 lm	865x39x64 mm
HalLED 16-865 AE	87016403001	4000 K	satined	15,0 W	2270 lm	865x39x64 mm
HalLED 16-865 AE dim	87016403002	4000 K	satined	15,2 W	2270 lm	865x39x64 mm
HalLED 16-865 AE	87016403007	4000 K	clear	15,0 W	2503 lm	865x39x64 mm
HalLED 16-865 AE dim	87016403008	4000 K	clear	15,2 W	2503 lm	865x39x64 mm
HalLED 16-865 AE	87016503001	5000 K	satined	15,0 W	2270 lm	865x39x64 mm
HalLED 16-865 AE dim	87016503002	5000 K	satined	15,2 W	2270 lm	865x39x64 mm
HalLED 16-865 AE	87016503007	5000 K	clear	15,0 W	2503 lm	865x39x64 mm
HalLED 16-865 AE dim	87016503008	5000 K	clear	15,2 W	2503 lm	865x39x64 mm
HalLED 17-1145 AE	87017303001	3000 K	satined	19,4 W	2851 lm	1145x39x64 mm
HalLED 17-1145 AE dim	87017303002	3000 K	satined	19,7 W	2851 lm	1145x39x64 mm
HalLED 17-1145 AE	87017303007	3000 K	clear	19,4 W	3143 lm	1145x39x64 mm
HalLED 17-1145 AE dim	87017303008	3000 K	clear	19,7 W	3143 lm	1145x39x64 mm
HalLED 17-1145 AE	87017403001	4000 K	satined	19,4 W	3027 lm	1145x39x64 mm
HalLED 17-1145 AE dim	87017403002	4000 K	satined	19,7 W	3027 lm	1145x39x64 mm
HalLED 17-1145 AE	87017403007	4000 K	clear	19,4 W	3337 lm	1145x39x64 mm
HalLED 17-1145 AE dim	87017403008	4000 K	clear	19,7 W	3337 lm	1145x39x64 mm
HalLED 17-1145 AE	87017503001	5000 K	satined	19,4 W	3027 lm	1145x39x64 mm
HalLED 17-1145 AE dim	87017503002	5000 K	satined	19,7 W	3027 lm	1145x39x64 mm
HalLED 17-1145 AE	87017503007	5000 K	clear	19,4 W	3337 lm	1145x39x64 mm
HalLED 17-1145 AE dim	87017503008	5000 K	clear	19,7 W	3337 lm	1145x39x64 mm
HalLED 22-1425 AE	87022303001	3000 K	satined	23,9 W	3564 lm	1425x39x64 mm
HalLED 22-1425 AE dim	87022303002	3000 K	satined	24,2 W	3564 lm	1425x39x64 mm
HalLED 22-1425 AE	87022303007	3000 K	clear	23,9 W	3929 lm	1425x39x64 mm
HalLED 22-1425 AE dim	87022303008	3000 K	clear	24,2 W	3929 lm	1425x39x64 mm
HalLED 22-1425 AE	87022403001	4000 K	satined	23,9 W	3784 lm	1425x39x64 mm
HalLED 22-1425 AE dim	87022403002	4000 K	satined	24,2 W	3784 lm	1425x39x64 mm
HalLED 22-1425 AE	87022403007	4000 K	clear	23,9 W	4171 lm	1425x39x64 mm
HalLED 22-1425 AE dim	87022403008	4000 K	clear	24,2 W	4171 lm	1425x39x64 mm
HalLED 22-1425 AE	87022503001	5000 K	satined	23,9 W	3784 lm	1425x39x64 mm
HalLED 22-1425 AE dim	87022503002	5000 K	satined	24,2 W	3784 lm	1425x39x64 mm
HalLED 22-1425 AE	87022503007	5000 K	clear	23,9 W	4171 lm	1425x39x64 mm
HalLED 22-1425 AE dim	87022503008	5000 K	clear	24,2 W	4171 lm	1425x39x64 mm
HalLED 24-865 AE	87024303001	3000 K	satined	26,9 W	3630 lm	865x39x64 mm
HalLED 24-865 AE dim	87024303002	3000 K	satined	27,2 W	3630 lm	865x39x64 mm
HalLED 24-865 AE	87024303007	3000 K	clear	26,9 W	4001 lm	865x39x64 mm
HalLED 24-865 AE dim	87024303008	3000 K	clear	27,2 W	4001 lm	865x39x64 mm
HalLED 24-865 AE	87024403001	4000 K	satined	26,9 W	3868 lm	865x39x64 mm

HalLED 24-865 AE dim	87024403002	4000 K	satined	27,2 W	3868 lm	865x39x64 mm
HalLED 24-865 AE	87024403007	4000 K	clear	26,9 W	4263 lm	865x39x64 mm
HalLED 24-865 AE dim	87024403008	4000 K	clear	27,2 W	4263 lm	865x39x64 mm
HalLED 24-865 AE	87024503001	5000 K	satined	26,9 W	3868 lm	865x39x64 mm
HalLED 24-865 AE dim	87024503002	5000 K	satined	27,2 W	3868 lm	865x39x64 mm
HalLED 24-865 AE	87024503007	5000 K	clear	26,9 W	4263 lm	865x39x64 mm
HalLED 24-865 AE dim	87024503008	5000 K	clear	27,2 W	4263 lm	865x39x64 mm
HalLED 30-1425 AE	87030303001	3000 K	satined	30,4 W	4400 lm	1425x39x64 mm
HalLED 30-1425 AE dim	87030303002	3000 K	satined	30,7 W	4400 lm	1425x39x64 mm
HalLED 30-1425 AE	87030303007	3000 K	clear	30,4 W	4850 lm	1425x39x64 mm
HalLED 30-1425 AE dim	87030303008	3000 K	clear	30,7 W	4850 lm	1425x39x64 mm
HalLED 30-1425 AE	87030403001	4000 K	satined	30,4 W	4686 lm	1425x39x64 mm
HalLED 30-1425 AE dim	87030403002	4000 K	satined	30,7 W	4686 lm	1425x39x64 mm
HalLED 30-1425 AE	87030403007	4000 K	clear	30,4 W	5165 lm	1425x39x64 mm
HalLED 30-1425 AE dim	87030403008	4000 K	clear	30,7 W	5165 lm	1425x39x64 mm
HalLED 30-1425 AE	87030503001	5000 K	satined	30,4 W	4686 lm	1425x39x64 mm
HalLED 30-1425 AE dim	87030503002	5000 K	satined	30,7 W	4686 lm	1425x39x64 mm
HalLED 30-1425 AE	87030503007	5000 K	clear	30,4 W	5165 lm	1425x39x64 mm
HalLED 30-1425 AE dim	87030503008	5000 K	clear	30,7 W	5165 lm	1425x39x64 mm
HalLED 32-1145 AE	87032303001	3000 K	satined	34,7 W	4840 lm	1145x39x64 mm
HalLED 32-1145 AE dim	87032303002	3000 K	satined	35,1 W	4840 lm	1145x39x64 mm
HalLED 32-1145 AE	87032303007	3000 K	clear	34,7 W	5335 lm	1145x39x64 mm
HalLED 32-1145 AE dim	87032303008	3000 K	clear	35,1 W	5335 lm	1145x39x64 mm
HalLED 32-1145 AE	87032403001	4000 K	satined	34,7 W	5157 lm	1145x39x64 mm
HalLED 32-1145 AE dim	87032403002	4000 K	satined	35,1 W	5157 lm	1145x39x64 mm
HalLED 32-1145 AE	87032403007	4000 K	clear	34,7 W	5684 lm	1145x39x64 mm
HalLED 32-1145 AE dim	87032403008	4000 K	clear	35,1 W	5684 lm	1145x39x64 mm
HalLED 32-1145 AE	87032503001	5000 K	satined	34,7 W	5157 lm	1145x39x64 mm
HalLED 32-1145 AE dim	87032503002	5000 K	satined	35,1 W	5157 lm	1145x39x64 mm
HalLED 32-1145 AE	87032503007	5000 K	clear	34,7 W	5684 lm	1145x39x64 mm
HalLED 32-1145 AE dim	87032503008	5000 K	clear	35,1 W	5684 lm	1145x39x64 mm
HalLED 40-1425 AE	87040303001	3000 K	satined	42,5 W	6050 lm	1425x39x64 mm
HalLED 40-1425 AE dim	87040303002	3000 K	satined	42,9 W	6050 lm	1425x39x64 mm
HalLED 40-1425 AE	87040303007	3000 K	clear	42,5 W	6669 lm	1425x39x64 mm
HalLED 40-1425 AE dim	87040303008	3000 K	clear	42,9 W	6669 lm	1425x39x64 mm
HalLED 40-1425 AE	87040403001	4000 K	satined	42,5 W	6446 lm	1425x39x64 mm
HalLED 40-1425 AE dim	87040403002	4000 K	satined	42,9 W	6446 lm	1425x39x64 mm
HalLED 40-1425 AE	87040403007	4000 K	clear	42,5 W	7105 lm	1425x39x64 mm
HalLED 40-1425 AE dim	87040403008	4000 K	clear	42,9 W	7105 lm	1425x39x64 mm
HalLED 40-1425 AE	87040503001	5000 K	satined	42,5 W	6446 lm	1425x39x64 mm
HalLED 40-1425 AE dim	87040503002	5000 K	satined	42,9 W	6446 lm	1425x39x64 mm
HalLED 40-1425 AE	87040503007	5000 K	clear	42,5 W	7105 lm	1425x39x64 mm
HalLED 40-1425 AE dim	87040503008	5000 K	clear	42,9 W	7105 lm	1425x39x64 mm

HaLED Track Light



Track Light for EUTRAC track system, different light colours are available, other light colours on request, different wattages, different lengths, dimmable versions, various covers, protection category IP20, ENEC certified

Type	Article Number	Light Colour	Optic	System Output	Luminous Flux System	Dimension
HALLED 16-865 S	87016303005	3000 K	satined	15,2 W	2138 lm	865x39x64 mm
HALLED 16-865 S dim	87016303006	3000 K	satined	15,2 W	2138 lm	865x39x64 mm
HALLED 16-865 S	87016303011	3000 K	clear	15,0 W	2357 lm	865x39x64 mm
HALLED 16-865 S dim	87016303012	3000 K	clear	15,2 W	2357 lm	865x39x64 mm
HALLED 16-865 S	87016403005	4000 K	satined	15,0 W	2270 lm	865x39x64 mm
HALLED 16-865 S dim	87016403006	4000 K	satined	15,2 W	2270 lm	865x39x64 mm
HALLED 16-865 S	87016403011	4000 K	clear	15,0 W	2503 lm	865x39x64 mm
HALLED 16-865 S dim	87016403012	4000 K	clear	15,2 W	2503 lm	865x39x64 mm
HALLED 16-865 S	87016503005	5000 K	satined	15,0 W	2270 lm	865x39x64 mm
HALLED 16-865 S dim	87016503006	5000 K	satined	15,2 W	2270 lm	865x39x64 mm
HALLED 16-865 S	87016503011	5000 K	clear	15,0 W	2503 lm	865x39x64 mm
HALLED 16-865 S dim	87016503012	5000 K	clear	15,2 W	2503 lm	865x39x64 mm
HALLED 17-1145 S	87017303005	3000 K	satined	19,4 W	2851 lm	1145x39x64 mm
HALLED 17-1145 S dim	87017303006	3000 K	satined	19,7 W	2851 lm	1145x39x64 mm
HALLED 17-1145 S	87017303011	3000 K	clear	19,4 W	3143 lm	1145x39x64 mm
HALLED 17-1145 S dim	87017303012	3000 K	clear	19,7 W	3143 lm	1145x39x64 mm
HALLED 17-1145 S	87017403005	4000 K	satined	19,4 W	3027 lm	1145x39x64 mm
HALLED 17-1145 S dim	87017403006	4000 K	satined	19,7 W	3027 lm	1145x39x64 mm
HALLED 17-1145 S	87017403011	4000 K	clear	19,4 W	3337 lm	1145x39x64 mm
HALLED 17-1145 S dim	87017403012	4000 K	clear	19,7 W	3337 lm	1145x39x64 mm
HALLED 17-1145 S	87017503005	5000 K	satined	19,4 W	3027 lm	1145x39x64 mm
HALLED 17-1145 S dim	87017503006	5000 K	satined	19,7 W	3027 lm	1145x39x64 mm
HALLED 17-1145 S	87017503011	5000 K	clear	19,4 W	3337 lm	1145x39x64 mm
HALLED 17-1145 S dim	87017503012	5000 K	clear	19,7 W	3337 lm	1145x39x64 mm
HALLED 22-1425 S	87022303005	3000 K	satined	23,9 W	3564 lm	1425x39x64 mm
HALLED 22-1425 S dim	87022303006	3000 K	satined	24,2 W	3564 lm	1425x39x64 mm
HALLED 22-1425 S	87022303011	3000 K	clear	23,9 W	3929 lm	1425x39x64 mm
HALLED 22-1425 S dim	87022303012	3000 K	clear	24,2 W	3929 lm	1425x39x64 mm
HALLED 22-1425 S	87022403005	4000 K	satined	23,9 W	3784 lm	1425x39x64 mm
HALLED 22-1425 S dim	87022403006	4000 K	satined	24,2 W	3784 lm	1425x39x64 mm
HALLED 22-1425 S	87022403011	4000 K	clear	23,9 W	4171 lm	1425x39x64 mm
HALLED 22-1425 S dim	87022403012	4000 K	clear	24,2 W	4171 lm	1425x39x64 mm
HALLED 22-1425 S	87022503005	5000 K	satined	23,9 W	3784 lm	1425x39x64 mm
HALLED 22-1425 S dim	87022503006	5000 K	satined	24,2 W	3784 lm	1425x39x64 mm
HALLED 22-1425 S	87022503011	5000 K	clear	23,9 W	4171 lm	1425x39x64 mm
HALLED 22-1425 S dim	87022503012	5000 K	clear	24,2 W	4171 lm	1425x39x64 mm
HALLED 24-865 S	87024303005	3000 K	satined	26,9 W	3630 lm	865x39x64 mm
HALLED 24-865 S dim	87024303006	3000 K	satined	27,2 W	3630 lm	865x39x64 mm
HALLED 24-865 S	87024303011	3000 K	clear	26,9 W	4001 lm	865x39x64 mm
HALLED 24-865 S dim	87024303012	3000 K	clear	27,2 W	4001 lm	865x39x64 mm
HALLED 24-865 S	87024403005	4000 K	satined	26,9 W	3868 lm	865x39x64 mm
HALLED 24-865 S dim	87024403006	4000 K	satined	27,2 W	3868 lm	865x39x64 mm
HALLED 24-865 S	87024403011	4000 K	clear	26,9 W	4263 lm	865x39x64 mm
HALLED 24-865 S dim	87024403012	4000 K	clear	27,2 W	4263 lm	865x39x64 mm

HALLED 24-865 S	87024503005	5000 K	satined	26,9 W	3868 lm	865x39x64 mm
HALLED 24-865 S dim	87024503006	5000 K	satined	27,2 W	3868 lm	865x39x64 mm
HALLED 24-865 S	87024503011	5000 K	clear	26,9 W	4263 lm	865x39x64 mm
HALLED 24-865 S dim	87024503012	5000 K	clear	27,2 W	4263 lm	865x39x64 mm
HALLED 30-1425 S	87030303005	3000 K	satined	30,4 W	4400 lm	1425x39x64 mm
HALLED 30-1425 S dim	87030303006	3000 K	satined	30,7 W	4400 lm	1425x39x64 mm
HALLED 30-1425 S	87030303011	3000 K	clear	30,4 W	4850 lm	1425x39x64 mm
HALLED 30-1425 S dim	87030303012	3000 K	clear	30,7 W	4850 lm	1425x39x64 mm
HALLED 30-1425 S	87030403005	4000 K	satined	30,4 W	4686 lm	1425x39x64 mm
HALLED 30-1425 S dim	87030403006	4000 K	satined	30,7 W	4686 lm	1425x39x64 mm
HALLED 30-1425 S	87030403011	4000 K	clear	30,4 W	5165 lm	1425x39x64 mm
HALLED 30-1425 S dim	87030403012	4000 K	clear	30,7 W	5165 lm	1425x39x64 mm
HALLED 30-1425 S	87030503005	5000 K	satined	30,4 W	4686 lm	1425x39x64 mm
HALLED 30-1425 S dim	87030503006	5000 K	satined	30,7 W	4686 lm	1425x39x64 mm
HALLED 30-1425 S	87030503011	5000 K	clear	30,4 W	5165 lm	1425x39x64 mm
HALLED 30-1425 S dim	87030503012	5000 K	clear	30,7 W	5165 lm	1425x39x64 mm
HALLED 32-1145 S	87032303005	3000 K	satined	34,7 W	4840 lm	1145x39x64 mm
HALLED 32-1145 S dim	87032303006	3000 K	satined	35,1 W	4840 lm	1145x39x64 mm
HALLED 32-1145 S	87032303011	3000 K	clear	34,7 W	5335 lm	1145x39x64 mm
HALLED 32-1145 S dim	87032303012	3000 K	clear	35,1 W	5335 lm	1145x39x64 mm
HALLED 32-1145 S	87032403005	4000 K	satined	34,7 W	5157 lm	1145x39x64 mm
HALLED 32-1145 S dim	87032403006	4000 K	satined	35,1 W	5157 lm	1145x39x64 mm
HALLED 32-1145 S	87032403011	4000 K	clear	34,7 W	5684 lm	1145x39x64 mm
HALLED 32-1145 S dim	87032403012	4000 K	clear	35,1 W	5684 lm	1145x39x64 mm
HALLED 32-1145 S	87032503005	5000 K	satined	34,7 W	5157 lm	1145x39x64 mm
HALLED 32-1145 S dim	87032503006	5000 K	satined	35,1 W	5157 lm	1145x39x64 mm
HALLED 32-1145 S	87032503011	5000 K	clear	34,7 W	5684 lm	1145x39x64 mm
HALLED 32-1145 S dim	87032503012	5000 K	clear	35,1 W	5684 lm	1145x39x64 mm
HALLED 40-1425 S	87040303005	3000 K	satined	42,5 W	6050 lm	1425x39x64 mm
HALLED 40-1425 S dim	87040303006	3000 K	satined	42,9 W	6050 lm	1425x39x64 mm
HALLED 40-1425 S	87040303011	3000 K	clear	42,5 W	6669 lm	1425x39x64 mm
HALLED 40-1425 S dim	87040303012	3000 K	clear	42,9 W	6669 lm	1425x39x64 mm
HALLED 40-1425 S	87040403005	4000 K	satined	42,5 W	6446 lm	1425x39x64 mm
HALLED 40-1425 S dim	87040403006	4000 K	satined	42,9 W	6446 lm	1425x39x64 mm
HALLED 40-1425 S	87040403011	4000 K	clear	42,5 W	7105 lm	1425x39x64 mm
HALLED 40-1425 S dim	87040403012	4000 K	clear	42,9 W	7105 lm	1425x39x64 mm
HALLED 40-1425 S	87040503005	5000 K	satined	42,5 W	6446 lm	1425x39x64 mm
HALLED 40-1425 S dim	87040503006	5000 K	satined	42,9 W	6446 lm	1425x39x64 mm
HALLED 40-1425 S	87040503011	5000 K	clear	42,5 W	7105 lm	1425x39x64 mm
HALLED 40-1425 S dim	87040503012	5000 K	clear	42,9 W	7105 lm	1425x39x64 mm

HalLed Series Luminaire



Standard luminaire with plug and socket in the housing, suspension or ceiling mounting or light strip profile, different light colors available, other light colors on request, different wattages, different lengths, dimmable versions, different covers, protection class IP 20, ENEC certified

Type	Article Number	Light Colour	Optic	System Output	Luminous Flux System	Dimension
HalLED 16-865 AS	87016303003	3000 K	satined	15,0 W	2138 lm	865x39x64 mm
HalLED 16-865 AS dim	87016303004	3000 K	satined	15,2 W	2138 lm	865x39x64 mm
HalLED 16-865 AS	87016303009	3000 K	clear	15,0 W	2357 lm	865x39x64 mm
HalLED 16-865 AS dim	87016303010	3000 K	clear	15,2 W	2357 lm	865x39x64 mm
HalLED 16-865 AS	87016403003	4000 K	satined	15,0 W	2270 lm	865x39x64 mm
HalLED 16-865 AS dim	87016403004	4000 K	satined	15,2 W	2270 lm	865x39x64 mm
HalLED 16-865 AS	87016403009	4000 K	clear	15,0 W	2503 lm	865x39x64 mm
HalLED 16-865 AS dim	87016403010	4000 K	clear	15,2 W	2503 lm	865x39x64 mm
HalLED 16-865 AS dim	87016503004	5000 K	satined	15,2 W	2270 lm	865x39x64 mm
HalLED 16-865 AS	87016503009	5000 K	clear	15,0 W	2503 lm	865x39x64 mm
HalLED 16-865 AS dim	87016503010	5000 K	clear	15,2 W	2503 lm	865x39x64 mm
HalLED 17-1145 AS	87017303003	3000 K	satined	19,4 W	2851 lm	1145x39x64 mm
HalLED 17-1145 AS dim	87017303004	3000 K	satined	19,7 W	2851 lm	1145x39x64 mm
HalLED 17-1145 AS	87017303009	3000 K	clear	19,4 W	3143 lm	1145x39x64 mm
HalLED 17-1145 AS dim	87017303010	3000 K	clear	19,7 W	3143 lm	1145x39x64 mm
HalLED 17-1145 AS	87017403003	4000 K	satined	19,4 W	3027 lm	1145x39x64 mm
HalLED 17-1145 AS dim	87017403004	4000 K	satined	19,7 W	3027 lm	1145x39x64 mm
HalLED 17-1145 AS	87017403009	4000 K	clear	19,4 W	3337 lm	1145x39x64 mm
HalLED 17-1145 AS dim	87017403010	4000 K	clear	19,7 W	3337 lm	1145x39x64 mm
HalLED 17-1145 AS	87017503003	5000 K	satined	19,4 W	3027 lm	1145x39x64 mm
HalLED 17-1145 AS dim	87017503004	5000 K	satined	19,7 W	3027 lm	1145x39x64 mm
HalLED 17-1145 AS	87017503009	5000 K	clear	19,4 W	3337 lm	1145x39x64 mm
HalLED 17-1145 AS dim	87017503010	5000 K	clear	19,7 W	3337 lm	1145x39x64 mm
HalLED 22-1425 AS	87022303003	3000 K	satined	23,9 W	3564 lm	1425x39x64 mm
HalLED 22-1425 AS dim	87022303004	3000 K	satined	24,2 W	3564 lm	1425x39x64 mm
HalLED 22-1425 AS	87022303009	3000 K	clear	23,9 W	3929 lm	1425x39x64 mm
HalLED 22-1425 AS dim	87022303010	3000 K	clear	24,2 W	3929 lm	1425x39x64 mm
HalLED 22-1425 AS	87022403003	4000 K	satined	23,9 W	3784 lm	1425x39x64 mm
HalLED 22-1425 AS dim	87022403004	4000 K	satined	24,2 W	3784 lm	1425x39x64 mm
HalLED 22-1425 AS	87022403009	4000 K	clear	23,9 W	4171 lm	1425x39x64 mm
HalLED 22-1425 AS dim	87022403010	4000 K	clear	24,2 W	4171 lm	1425x39x64 mm
HalLED 22-1425 AS	87022503003	5000 K	satined	23,9 W	3784 lm	1425x39x64 mm
HalLED 22-1425 AS dim	87022503004	5000 K	satined	24,2 W	3784 lm	1425x39x64 mm
HalLED 22-1425 AS	87022503009	5000 K	clear	23,9 W	4171 lm	1425x39x64 mm
HalLED 22-1425 AS dim	87022503010	5000 K	clear	24,2 W	4171 lm	1425x39x64 mm
HalLED 24-865 AS	87024303003	3000 K	satined	26,9 W	3630 lm	865x39x64 mm
HalLED 24-865 AS dim	87024303004	3000 K	satined	27,2 W	3630 lm	865x39x64 mm
HalLED 24-865 AS	87024303009	3000 K	clear	26,9 W	4001 lm	865x39x64 mm
HalLED 24-865 AS dim	87024303010	3000 K	clear	27,2 W	4001 lm	865x39x64 mm
HalLED 24-865 AS	87024403003	4000 K	satined	26,9 W	3868 lm	865x39x64 mm
HalLED 24-865 AS dim	87024403004	4000 K	satined	27,2 W	3868 lm	865x39x64 mm
HalLED 24-865 AS	87024403009	4000 K	clear	26,9 W	4263 lm	865x39x64 mm
HalLED 24-865 AS dim	87024403010	4000 K	clear	27,2 W	4263 lm	865x39x64 mm
HalLED 24-865 AS	87024503003	5000 K	satined	26,9 W	3868 lm	865x39x64 mm

HalLED 24-865 AS dim	87024503004	5000 K	satined	27,2 W	3868 lm	865x39x64 mm
HalLED 24-865 AS	87024503009	5000 K	clear	26,9 W	4263 lm	865x39x64 mm
HalLED 24-865 AS dim	87024503010	5000 K	clear	27,2 W	4263 lm	865x39x64 mm
HalLED 30-1425 AS	87030303003	3000 K	satined	30,4 W	4400 lm	1425x39x64 mm
HalLED 30-1425 AS dim	87030303004	3000 K	satined	30,7 W	4400 lm	1425x39x64 mm
HalLED 30-1425 AS	87030303009	3000 K	clear	30,4 W	4850 lm	1425x39x64 mm
HalLED 30-1425 AS dim	87030303010	3000 K	clear	30,7 W	4850 lm	1425x39x64 mm
HalLED 30-1425 AS	87030403003	4000 K	satined	30,4 W	4686 lm	1425x39x64 mm
HalLED 30-1425 AS dim	87030403004	4000 K	satined	30,7 W	4686 lm	1425x39x64 mm
HalLED 30-1425 AS	87030403009	4000 K	clear	30,4 W	5165 lm	1425x39x64 mm
HalLED 30-1425 AS dim	87030403010	4000 K	clear	30,7 W	5165 lm	1425x39x64 mm
HalLED 30-1425 AS	87030503003	5000 K	satined	30,4 W	4686 lm	1425x39x64 mm
HalLED 30-1425 AS dim	87030503004	5000 K	satined	30,7 W	4686 lm	1425x39x64 mm
HalLED 30-1425 AS	87030503009	5000 K	clear	30,4 W	5165 lm	1425x39x64 mm
HalLED 30-1425 AS dim	87030503010	5000 K	clear	30,7 W	5165 lm	1425x39x64 mm
HalLED 32-1145 AS	87032303003	3000 K	satined	34,7 W	4840 lm	1145x39x64 mm
HalLED 32-1145 AS dim	87032303004	3000 K	satined	35,1 W	4840 lm	1145x39x64 mm
HalLED 32-1145 AS	87032303009	3000 K	clear	34,7 W	5335 lm	1145x39x64 mm
HalLED 32-1145 AS dim	87032303010	3000 K	clear	35,1 W	5335 lm	1145x39x64 mm
HalLED 32-1145 AS	87032403003	4000 K	satined	34,7 W	5157 lm	1145x39x64 mm
HalLED 32-1145 AS dim	87032403004	4000 K	satined	35,1 W	5157 lm	1145x39x64 mm
HalLED 32-1145 AS	87032403009	4000 K	clear	34,7 W	5684 lm	1145x39x64 mm
HalLED 32-1145 AS dim	87032403010	4000 K	clear	35,1 W	5684 lm	1145x39x64 mm
HalLED 32-1145 AS	87032503003	5000 K	satined	34,7 W	5157 lm	1145x39x64 mm
HalLED 32-1145 AS dim	87032503004	5000 K	satined	35,1 W	5157 lm	1145x39x64 mm
HalLED 32-1145 AS	87032503009	5000 K	clear	34,7 W	5684 lm	1145x39x64 mm
HalLED 32-1145 AS dim	87032503010	5000 K	clear	35,1 W	5684 lm	1145x39x64 mm
HalLED 40-1425 AS	87040303003	3000 K	satined	42,5 W	6050 lm	1425x39x64 mm
HalLED 40-1425 AS dim	87040303004	3000 K	satined	42,9 W	6050 lm	1425x39x64 mm
HalLED 40-1425 AS	87040303009	3000 K	clear	42,5 W	6669 lm	1425x39x64 mm
HalLED 40-1425 AS dim	87040303010	3000 K	clear	42,9 W	6669 lm	1425x39x64 mm
HalLED 40-1425 AS	87040403003	4000 K	satined	42,5 W	6446 lm	1425x39x64 mm
HalLED 40-1425 AS dim	87040403004	4000 K	satined	42,9 W	6446 lm	1425x39x64 mm
HalLED 40-1425 AS	87040403009	4000 K	clear	42,5 W	7105 lm	1425x39x64 mm
HalLED 40-1425 AS dim	87040403010	4000 K	clear	42,9 W	7105 lm	1425x39x64 mm
HalLED 40-1425 AS	87040503003	5000 K	satined	42,5 W	6446 lm	1425x39x64 mm
HalLED 40-1425 AS dim	87040503004	5000 K	satined	42,9 W	6446 lm	1425x39x64 mm
HalLED 40-1425 AS	87040503009	5000 K	clear	42,5 W	7105 lm	1425x39x64 mm
HalLED 40-1425 AS dim	87040503010	5000 K	clear	42,9 W	7105 lm	1425x39x64 mm



LED Square Panel



extremely flat LED panel, various installation options, dimmable DALI with switch-dim and Corridor-Function, special sizes on request, maintenance free, surface and mounting frames on request, various sizes, protection category IP20, ENEC certified

Type	Article Number	Light Colour	System Output	Luminous Flux System	Colour	Montage Options
LED Square Panel Light 295x295x12,8	82020300001	3000 K	22,5 W	1560 lm	white	Ceiling Fixture
LED Square Panel Light 295x295x12,8	82020400001	4000 K	22,5 W	1700 lm	white	Ceiling Fixture
LED Square Panel Light 1195x295 UGR <22	82036300001	3000 K	41,1 W	4100 lm	white	Ceiling Fixture
LED Square Panel Light 1195x295x12,9 UGR<19	82036300101	3000 K	41,1 W	3800 lm	white	Ceiling Fixture
LED Square Panel Light 1195x295 UGR<22	82036400001	4000 K	41,1 W	4140 lm	white	Ceiling Fixture
LED Square Panel Light 1195x295x12,8 UGR<19	82036400101	4000 K	41,1 W	3850 lm	white	Ceiling Fixture
LED Square Panel Light 620x620 UGR<22	82045300002	3000 K	36 W	4200 lm	white	Ceiling Fixture
LED Square Panel Light 620x620x12,8 UGR<19	82045300101	3000 K	36 W	4100 lm	white	Ceiling Fixture
LED Square Panel Light 620x620 UGR<22	82045400002	4000 K	36 W	4320 lm	white	Ceiling Fixture
LED Square Panel Light 620x620x12,8 UGR<19	82045400101	4000 K	36 W	4150 lm	white	Ceiling Fixture
LED Square Panel Light 1195x595x12,8	82055300001	3000 K	60,8 W	5330 lm	white	Ceiling Fixture
LED Square Panel Light 1195x595x12,8	82055400001	4000 K	60,8 W	5450 lm	white	Ceiling Fixture

LED round Panel



extremely flat LED panel, various installation options,
dimmable DALI with switch-dim and Corridor-Function,
special sizes on request, maintenance free, surface and
mounting frames on request, various sizes, protection
category IP20, ENEC certified

Type	Article Number	Light Colour	System Output	Luminous Flux System	Colour	Montage Options
LED Round Panel Light 180x20	83010300001	3000 K	12,0 W	810 lm	white	Ceiling Fixture
LED Round Panel Light 180x38	83010300003	3000 K	12,0 W	810 lm	white	Ceiling Fixture
LED Round Panel Light 180x20	83010400001	4000 K	12,0 W	880 lm	white	Ceiling Fixture
LED Round Panel Light 180x38	83010400004	4000 K	12,0 W	880 lm	white	Ceiling Fixture
LED Round Panel Light 240x20	83012300001	3000 K	14,1 W	980 lm	white	Ceiling Fixture
LED Round Panel Light 240x38	83012300003	3000 K	14,1 W	980 lm	white	Ceiling Fixture
LED Round Panel Light 240x20	83012400001	4000 K	14,1 W	1050 lm	white	Ceiling Fixture
LED Round Panel Light 240x38	83012400003	4000 K	14,1 W	1050 lm	white	Ceiling Fixture
LED Round Panel Light 300x20	83016300001	3000 K	20,5 W	1510 lm	white	Ceiling Fixture
LED Round Panel Light 300x38	83016300003	3000 K	20,5 W	1510 lm	white	Ceiling Fixture
LED Round Panel Light 300x20	83016400001	4000 K	20,5 W	1620 lm	white	Ceiling Fixture
LED Round Panel Light 300x38	83016400003	4000 K	20,5 W	1620 lm	rot	Ceiling Fixture

StakoLux GmbH
Werthmannstraße 12-16
26871 Papenburg

www.stakolux.de
info@stakolux.de

Tel.: +49 4961 667755-0
Fax: +49 4961 667755-19